

E

D

C

B

A

E





D

C

B

A




REV	DESCRIPTION	DESIGN	APPROVAL	DATE
AO	NEW	YUAN	RAY	2024/07/25

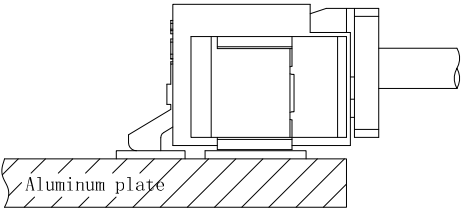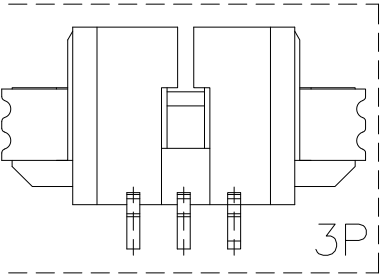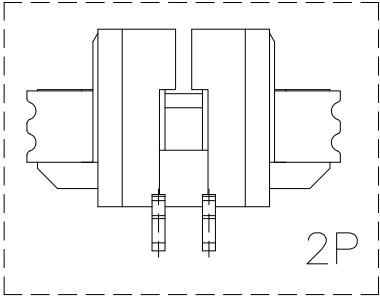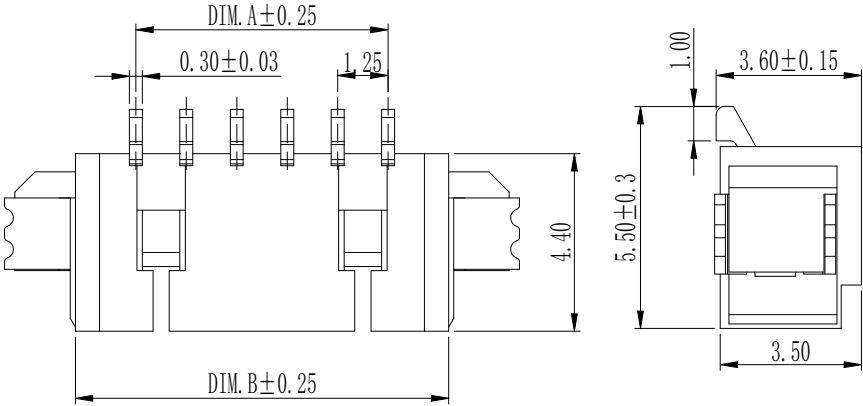

Specifications:

- Contact Resistance/接触电阻: $\leq 20\text{m}\Omega$
- Insulation Resistance/绝缘电阻: $\geq 100\text{M}\Omega$
- Rated Voltage/额定电压: 125V AC DC
- Rated Current/额定电流: 1.0A AC DC
- Withstand Voltage/耐压: 500v Ac/minute
- Temperature Range/工作温度范围: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- Housing/外壳: LCP UL94V-0
- Contacts/端子: Phosphor Bronze Sn-Plated
- Nail/定位钉: Brass Sn-Plated
- RoHS Compliance/产品符合RoHS;
- Order Information/编码原则: 991-XX X-7022

1:Natural 本色
2:Black 黑色
No Of Circuits:02-15

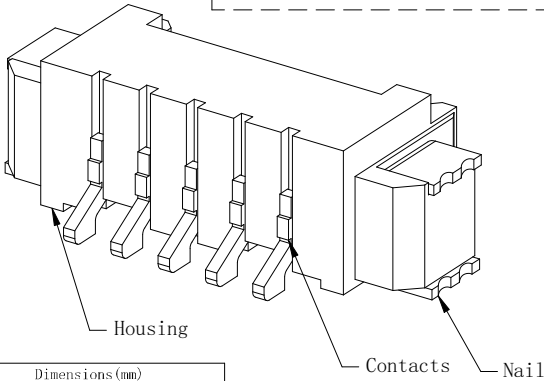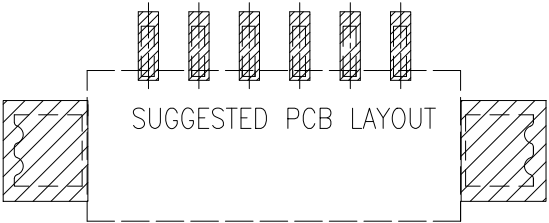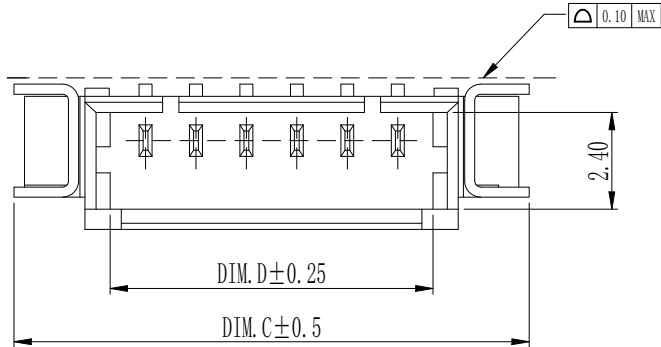

Circuit	Dimensions (mm)			
	DIM=A	DIM=B	DIM=C	DIM=D
02	1.25	4.25	7.75	3.20
03	2.50	5.50	9.00	4.45
04	3.75	6.75	10.25	5.70
05	5.00	8.00	11.50	6.95
06	6.25	9.25	12.75	8.20
07	7.50	10.50	14.00	9.45
08	8.75	11.75	15.25	10.70
09	10.00	13.00	16.50	11.95
10	11.25	14.25	17.75	13.20
11	12.50	15.50	19.00	14.45
12	13.75	16.75	20.25	15.70
13	15.00	18.00	21.50	16.95
14	16.25	19.25	22.75	18.20
15	17.50	20.50	24.00	19.45
16	18.75	21.75	25.25	20.70

The information in this document is property of JiDe company and should not be copied or reproduced in any other way, without written permission.



Guangdong JiDe Precision Electronics Co., Ltd
广东济德精密电子有限公司

TITLE: 1.25mm PITCH 90° WAFER SMT TYPE	PART NO. 991-0XX-7022
APPD:	DWG NO: C-991-0XX-7022
CHKD:	
DRAW:	
	SCALE N/A
	SHEET 1/1
	REV. AO