

1.材料和电镀\Materials and Finishes:



外 壳\Body - 黄铜\Brass,镀三元\Tri-matel plating
内导体>Contact - 铍铜\Beryllium copper,镀金\Gold plating
绝缘体\Insulator - 聚四氟乙烯\Teflon,本色\Natural
其 他\Accessories - 铜材\Copper,镀三元\Tri-matel plating
密封圈\Gasket- 硅橡胶\Silicone rubber

2.电气性能\Electrical:

A.特性阻抗\Impedance:N/A
B.使用频率\Frequency range:DC-300MHz
C.介质耐压\Breakdown voltage:3500V rms
D.绝缘电阻\Insulation resistance:5000 MΩ

3.机械性能\Mechanical:

A.使用寿命\Durability:500 cycles

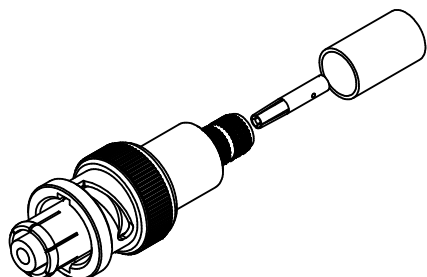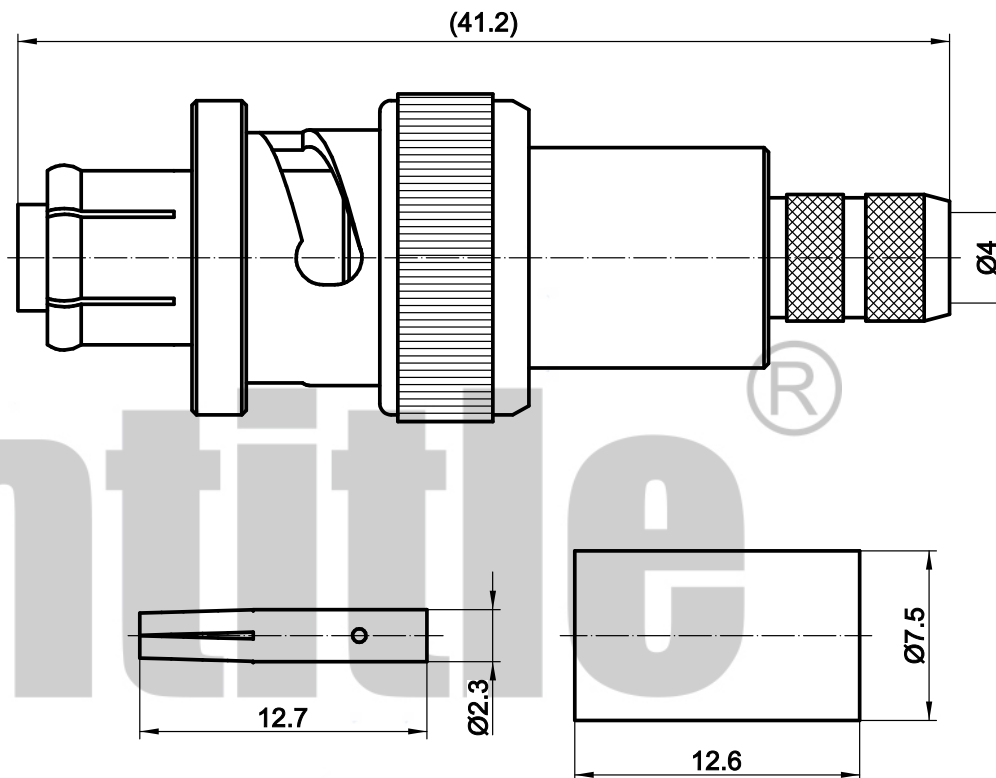

 技术支持 13975145315			版次	比例	3:1	料号	CT6.1.1332
			第一角法			规格	SHV-C-K4
设计	JAT	2024.01.23	1.未注公差按ISO2768-1(m) 2.去尽毛刺C0.13max 3.各圆同轴度Ø0.1max			名称	SHV母头接3KV绝缘φ4电缆
审核	DF	2024.01.23				 深圳成泰电子有限公司 www.cntitle.net	
批准	DF	2024.01.23	*尺寸为重要尺寸		单位	mm	