
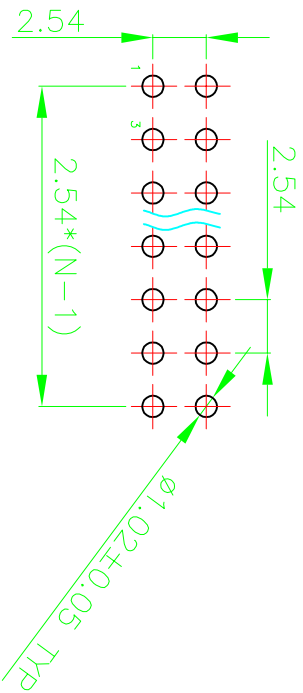



COMPLIANT ROHS

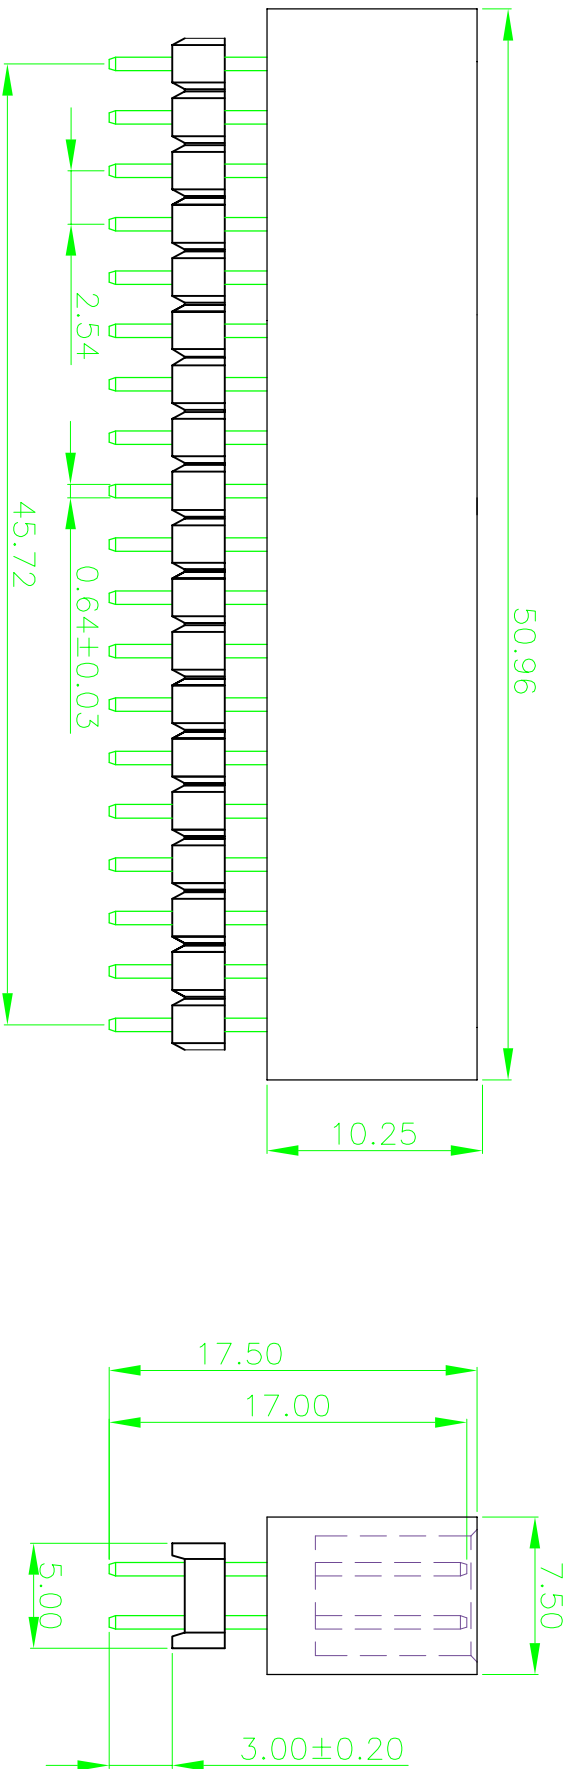

RECOMMENDED PCB LAYOUT
TOLERANCE:±0.05

NOTES:

1. MATERIAL
1.1. HOUSING: THERMOPLASTIC, BLACK UL94V-0
1.2. CONTACT: COPPER ALLOY
2. FINISH
2.1. 1u" MIN AU PLATED OVERALL
2.2. 50u" MIN. NICKEL UNDERPLATING OVER ALL.

| | | | | | | | | | | |
|--------------|-----------------|--------------|----------|--------------------------------|------------|----------|-------|--------------------|---|-------------|
| | | GENERAL TOL. | | DRAW NO. | TWT-E00038 | DATE | P/NO. | XDHM-B025417-2*19P | | 深圳市连欣科技有限公司 |
| | | X. | ±0.30 | DESIGN: | Mike.Lee | 10/16'14 | SIZE: | A4 |  | |
| | | X.X | ±0.25 | CHECK: | | | UNIT: | mm | SHEET: 1 OF 1 | |
| AO | INITIAL RELEASE | 12/26'07 | Mike.Lee | | | | REV. | A0 | SCALE: N/A | |
| REV. ECN NO. | DESCRIPTION | DATE | DESIGN | DRAW NAME: | | | | | | |
| | | | | PH2.54MM 2*19PIN排针17.5H<针长17.0 | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

深圳市连欣科技有限公司