


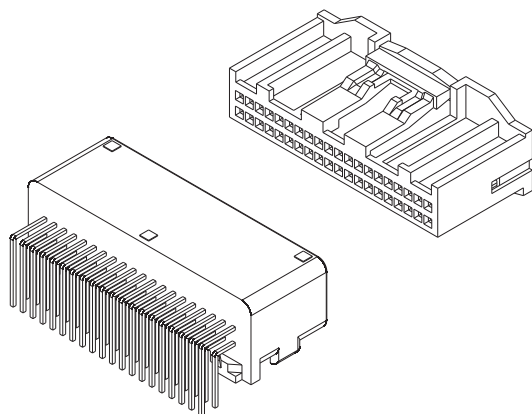

技术特性/Specifications:

额定电压 Rated voltage: 12V AC, DC

额定电流 Rated current: 3mA AC, DC

接触电阻 Contact resistance: 20m Ω max

绝缘电阻 Insulation resistance: 100M Ω min

耐压 Withstand voltage: 1000V AC/minute

环境温度 Ambient temperature: -40 $^{\circ}$ C~+105 $^{\circ}$ C

适用线规 Wire range: AWG#24~#20

REV.	REVISION DESCRIPTION	DATE	APPD










NOTES

Available in 08 through 40 Circuits.

Match with DL22001-Y series housing.


Material : PBT UL94-V0.

Pin Material : Brass .

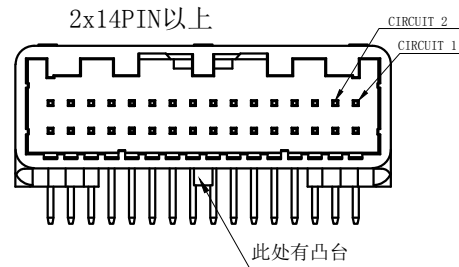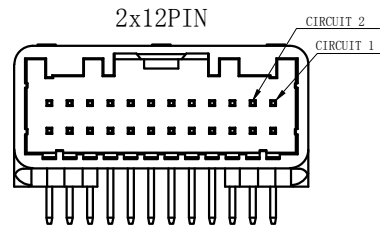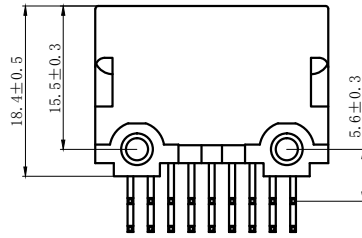

Circuits	Product name	Dimensino (mm)			Circuits	Product name	Dimensino (mm)		
		A	B	C			A	B	C
2X4	QA-8AW	6.60	14.20	8.20	2X10	QA-20AW	19.80	27.40	21.50
2X5	QA-10AW	8.80	16.40	9.50	2X12	QA-24AW	24.20	31.80	23.10
2X6	QA-12AW	11.00	18.60	9.60	2X14	QA-28AW	28.60	36.20	27.20
2X7	QA-14AW	13.20	20.80	11.80	2X16	QA-32AW	33.00	40.60	31.60
2X8	QA-16AW	15.40	23.00	14.00	2X20	QA-40AW	41.80	49.40	40.40
2X9	QA-18AW	17.60	25.20	16.20					

GENERAL TOLERANCES (UNLESS SPECIFIED)		ZHE JIANG DELI CONNECTORS CO ., LTD			
.X: ± 0.25	X° : ± 3.0°	PRODUCT NAME: DL22001 (QA) -AW		TITLE: 2.20 mm Pitch Housing	
.XX: ± 0.15	.X° : ± 2.0°				
.XXX: ± 0.01	.XX° : ± 1.0°	DR:Chen Quan Long	DATE:22/08/01	PART NO:	
FINISH: _____		CHKD: Wu Hui	DATE:22/08/01		
DRAWING NO:		APPD:Ren An De	DATE:22/08/01	UNITS: mm	REV. : A

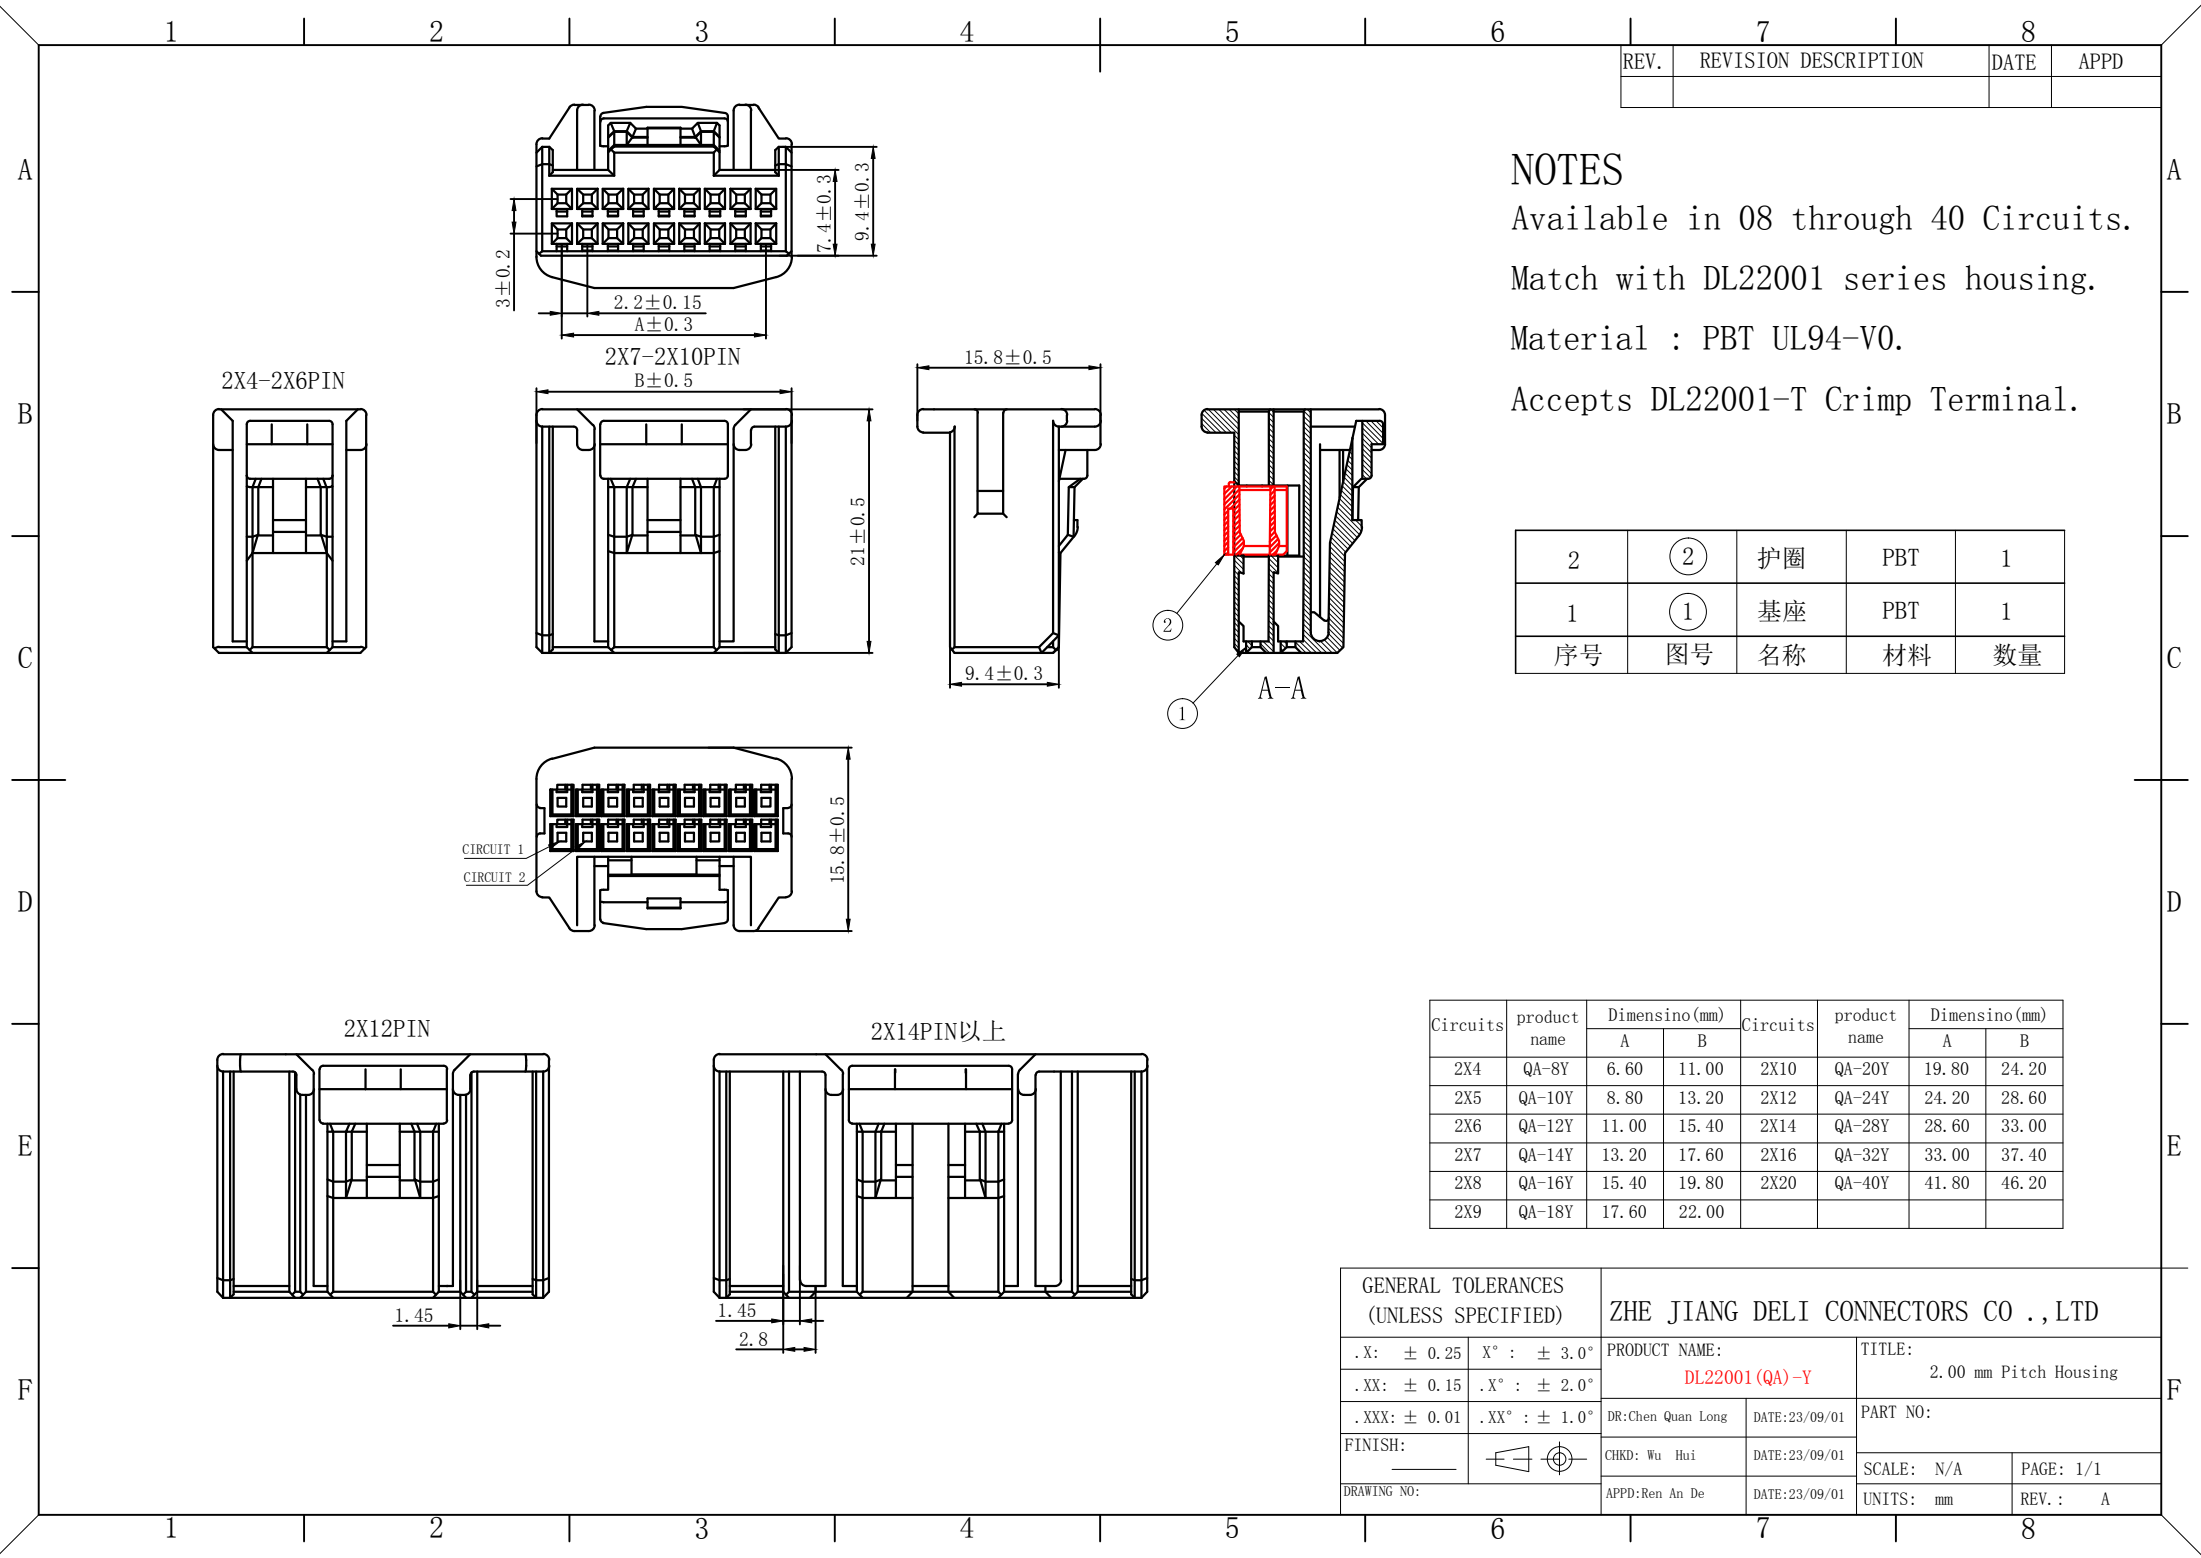

REV.	REVISION DESCRIPTION	DATE	APPD

NOTES

Available in 08 through 40 Circuits.

Match with DL22001 series housing.

Material : PBT UL94-V0.

Accepts DL22001-T Crimp Terminal.

2	②	护圈	PBT	1
1	①	基座	PBT	1
序号	图号	名称	材料	数量

Circuits	product name	Dimensino (mm)		Circuits	product name	Dimensino (mm)	
		A	B			A	B
2X4	QA-8Y	6.60	11.00	2X10	QA-20Y	19.80	24.20
2X5	QA-10Y	8.80	13.20	2X12	QA-24Y	24.20	28.60
2X6	QA-12Y	11.00	15.40	2X14	QA-28Y	28.60	33.00
2X7	QA-14Y	13.20	17.60	2X16	QA-32Y	33.00	37.40
2X8	QA-16Y	15.40	19.80	2X20	QA-40Y	41.80	46.20
2X9	QA-18Y	17.60	22.00				

GENERAL TOLERANCES (UNLESS SPECIFIED)				ZHE JIANG DELI CONNECTORS CO ., LTD			
.X: ± 0.25	X° : ± 3.0°	PRODUCT NAME: DL22001 (QA)-Y		TITLE: 2.00 mm Pitch Housing			
.XX: ± 0.15	.X° : ± 2.0°	DR:Chen Quan Long		DATE:23/09/01		PART NO:	
.XXX: ± 0.01	.XX° : ± 1.0°	FINISH:		CHKD: Wu Hui		SCALE: N/A	
DRAWING NO:		APPD:Ren An De		DATE:23/09/01		PAGE: 1/1	
						UNITS: mm	
						REV. : A	

REV.	REVISION DESCRIPTION	DATE	APPD

A


B

C

D



E

F

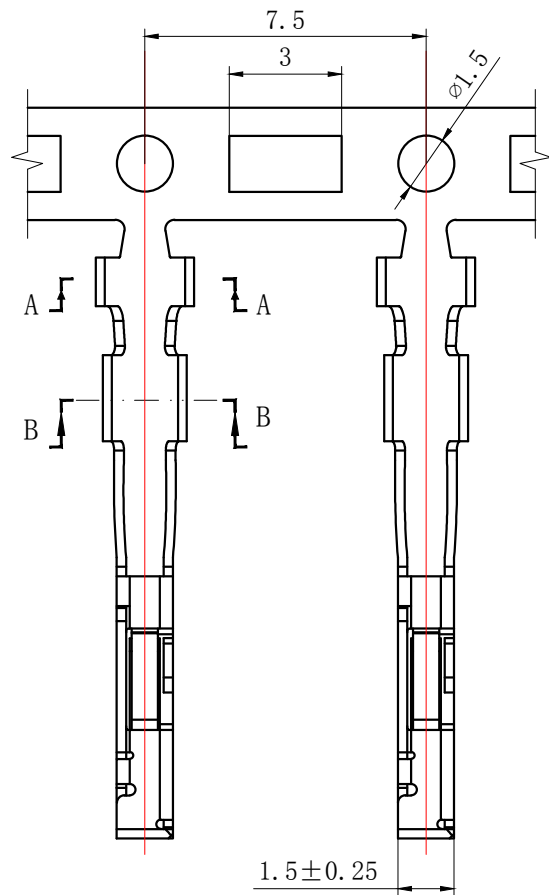


1.5±0.25

SECTION A-A



SECTION B-B

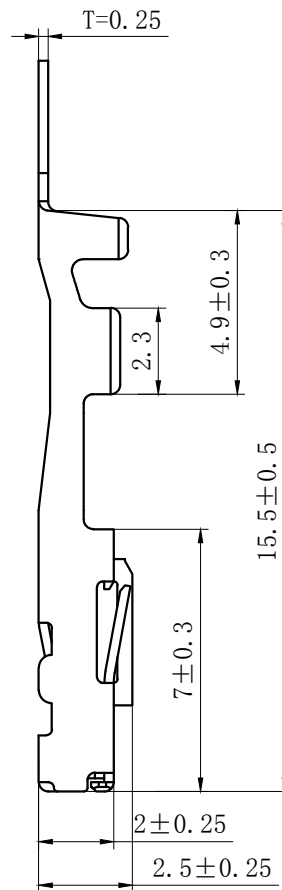

NOTES

Used in DL22001-Y Series Housing.

Accepts AWG #20~24 Wire Range.

Material : Phosphor Bronze .

Finish: Tin plated.

Thickness: 0.25 mm.

A

B

C

D

E

F

GENERAL TOLERANCES (UNLESS SPECIFIED)		ZHE JIANG DELI CONNECTORS CO .,LTD			
.X: ± 0.25	X° : ± 3.0°	PRODUCT NAME:		TITLE:	
.XX: ± 0.15	.X° : ± 2.0°	DL22001 (QA)-T		2.20 mm Pitch Crimp Terminal	
.XXX: ± 0.01	.XX° : ± 1.0°	DR:Chen Quan Long	DATE:22/08/01	PART NO:	
FINISH:		CHKD: Wu Hui	DATE:22/08/01	SCALE: N/A	PAGE: 1/1
DRAWING NO:		APPD:Ren An De	DATE:22/08/01	UNITS: mm	REV.: A