

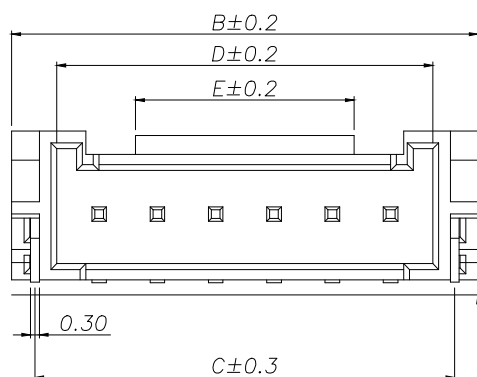
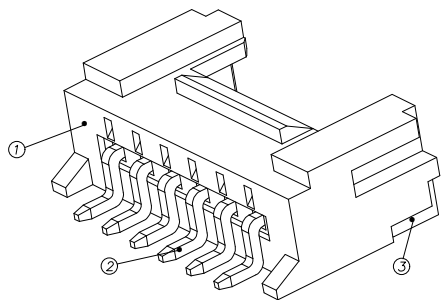
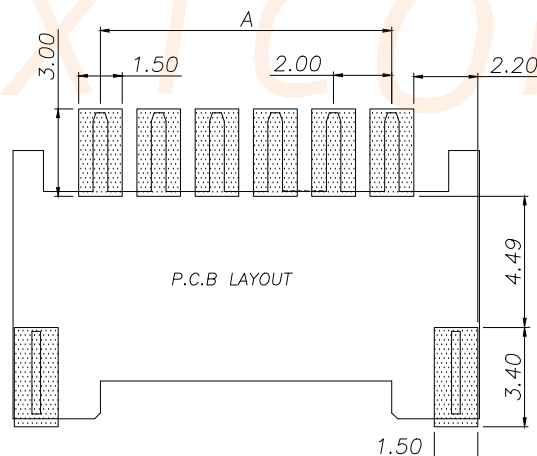
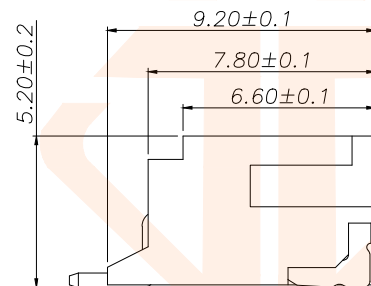


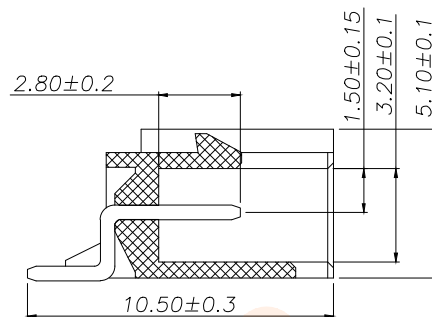

|        |      |     |
|--------|------|-----|
| 02-10P | 0.10 | MAX |
| 11-16P | 0.12 | MAX |

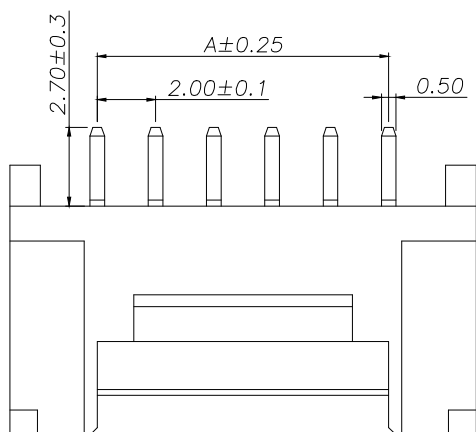

| REV. | ECN NO. | DESCRIPTION | DATE | DESIGN |
|------|---------|-------------|------|--------|
|      |         |             |      |        |

#### NOTES:

- 1.BASE: LCP
- 2.PIN: Brass
- 3.Solder Tab: Brass

#### SPECIFICATIONS:

- 1.Spacing: 2.0
- 2.Voltage Rating: 250V AC DC
- 3.Current Rating: 2A AC DC
- 4.Insulation Resistance: 800MΩ Min
- 5.Contact Resistance: 20mΩ Max
- 6.Withstanding voltage: 500V AC 1/Minute
- 7.Temperatuer Range: -25℃ ~+ 85℃

| Part No          | Pin | A     | B     | C     | D     |
|------------------|-----|-------|-------|-------|-------|
| D200E1W1-2W2P43  | 2   | 2.00  | 8.00  | 2.50  | 4.90  |
| D200E1W1-2W3P43  | 3   | 4.00  | 10.00 | 2.50  | 6.90  |
| D200E1W1-2W4P43  | 4   | 6.00  | 12.00 | 5.00  | 8.90  |
| D200E1W1-2W5P43  | 5   | 8.00  | 14.00 | 7.00  | 10.90 |
| D200E1W1-2W6P43  | 6   | 10.00 | 16.00 | 9.00  | 12.90 |
| D200E1W1-2W7P43  | 7   | 12.00 | 18.00 | 11.00 | 14.90 |
| D200E1W1-2W8P43  | 8   | 14.00 | 20.00 | 13.00 | 16.90 |
| D200E1W1-2W9P43  | 9   | 16.00 | 22.00 | 15.00 | 18.90 |
| D200E1W1-2W10P43 | 10  | 18.00 | 24.00 | 17.00 | 20.90 |
| D200E1W1-2W11P43 | 11  | 20.00 | 26.00 | 19.00 | 22.90 |
| D200E1W1-2W12P43 | 12  | 22.00 | 28.00 | 21.00 | 24.90 |
| D200E1W1-2W13P43 | 13  | 24.00 | 30.00 | 23.00 | 26.90 |
| D200E1W1-2W14P43 | 14  | 26.00 | 32.00 | 25.00 | 28.90 |
| D200E1W1-2W15P43 | 15  | 28.00 | 34.00 | 27.00 | 30.90 |
| D200E1W1-2W16P43 | 16  | 30.00 | 36.00 | 29.00 | 32.90 |

| TOLERANCE  |           | 深圳聚兴泰电子科技有限公司<br>Shenzhen Juxingtai Electronic Technology Co., Ltd |                           |       |       |
|------------|-----------|--------------------------------------------------------------------|---------------------------|-------|-------|
| X.X ±0.30  | X.* ±5°   | PART NO.<br>D200E1W1-2WXP43                                        | TITLE:<br>WAFER 2.00 卧贴带扣 |       |       |
| .XX ±0.20  | X.X* ±3°  |                                                                    |                           |       |       |
| .XXX ±0.10 | X.XX* ±1° |                                                                    |                           |       |       |
| UNITS      | mm        | DESIGN: Ethan                                                      | MANUFACTURE DWG           |       |       |
| MATERILA   | — — —     | CHED: Olvia                                                        |                           | SCALE | SHEET |
| FINISH     | — — —     | APPD: Ava                                                          |                           | N:A   | 1/1   |