


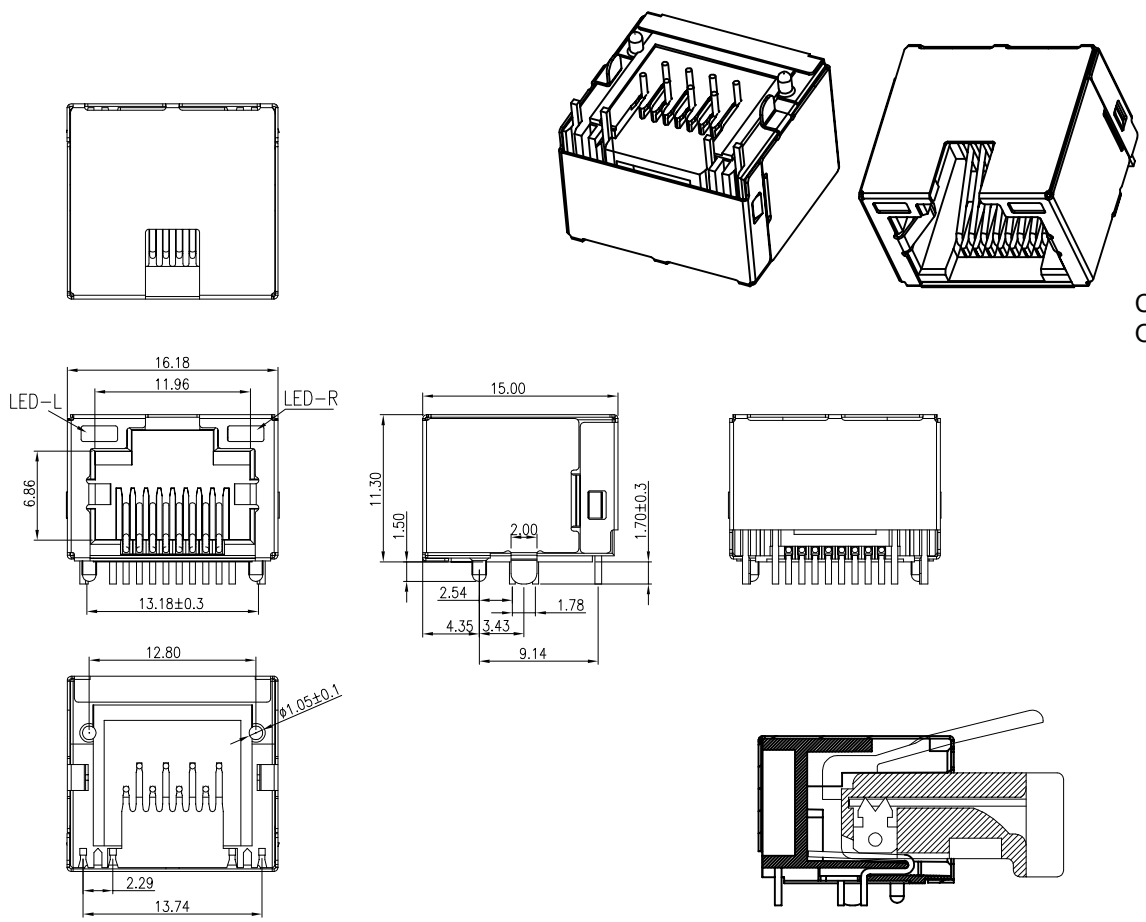


Connector Outline

- NOTES
- MATERIAL
- 1. HOUSING MATERIAL : GLASS FILLED POLYESTER UL94V-0.
 - 2. CONTACT MATERIAL : PHOSPHOR BRONZE $\phi 0.46\text{mm}$.
 - 3. PLATING : Au PLATING
 - 4. SHIELD : 0.20mm THICKNESS COPPER ALLOY WITH NICKEL PLATED.
- ELECTRICAL
- 1. VOLTAGE RATING : 125 VAC RMS.
 - 2. CURRENT RATING : 1.5 AMP.
 - 3. CONTACT RESISTANCE : 40 MILLIOHMS MAX.
 - 4. INSULATION RESISTANCE : 500 MEGOHMS MIN @ 100V DC .
 - 5. DIELECTRIC DIELECTRIC RESISTANCE : 500V DC RMS 50Hz. 1MIN.
- MECHANICAL
- 1. DURRABILITY : 750 CYCLES MIN.
 - 2. MATING/UNMATING FORC: 2.24 KG. F MAX.
- ENVIRONMENTAL:
- 1. OPERATION : -40°C~+85°C.
 - 2. STORAGE : -40°C~+85°C.

3206 - 008 - XX

系列码
RJ45 内弯脚
类别码
2.29圆针
流水码

41:有壳左黄右绿-0.5u"淡 LCP黑 盘装
42:有壳左黄右绿-0.5u"淡 LCP黑 卷装



				OPERATI ON	SCALE		Fit	Yxcon 东莞市宇熙精密连接器有限公司 www.yxcon.com Dongguan Yuxi Electronic Co.,Ltd.		
				X.X	±0.35					
				X.XX	±0.25					
				X.XXX	±0.05					
				Angle	±2°					
				DIM	TOL					
REV	DATE	SYMBOL	MODIFI CATI ON DESCR I PTI ON		SI ZE	A4	DESIGN	赵文品2024. 11. 06	PART NO	RJ45-3206-008-41
					SHEET	1/1	CHECK		TITLE	RJ45 TAB UP内弯脚左黄右绿2.29圆针-0.5u"淡LCP黑
					PROJ.		APPROVE		Customer No.	