




REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01	NEW	BATCH PRODUCTION INITIAL RELEASE.	2021.08.03	钟建虾

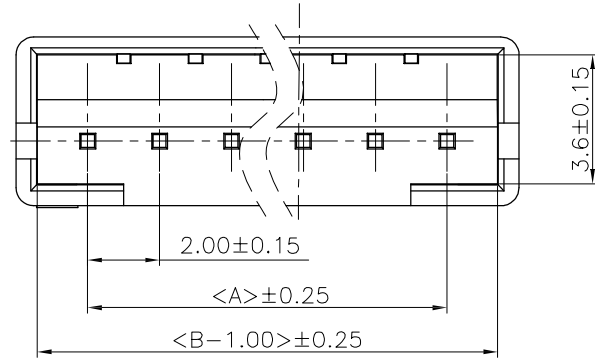


Recommended P.C.B Layout(Top Side)
P.C.B Thickness = 1.20mm
(Tolerance=±0.05)

Specifications:
Current rating:2A AC/DC.
Voltage rating:100V AC/DC
Temperature range:-40°C~+105°C.
Contact resistance:20mΩ Max.
Insulation resistance:1000MΩ Min.
Withstanding voltage: 800V AC/minute.
Material:PA66.UL94V-0.
All materials must meet GREENCONN
hazardous substances control standards.


模穴號1.2.3...

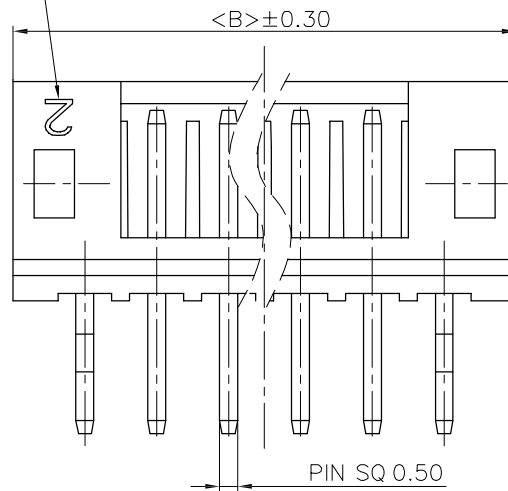

3~16 PIN 图示

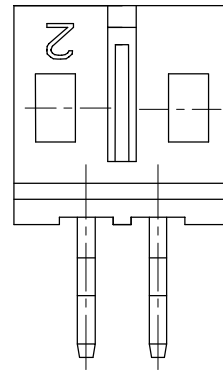

2 PIN 图示

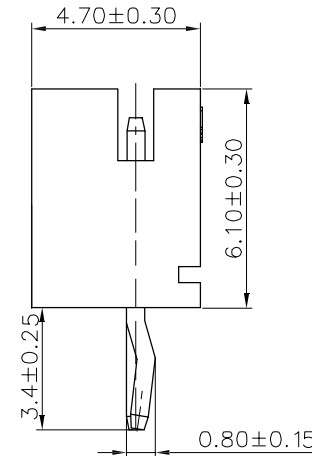

打正"K"

No. of PIN/ROW	Dimensions	
	A	B
02	2.00	6.00
03	4.00	8.00
04	6.00	10.00
05	8.00	12.00
06	10.00	14.00
07	12.00	16.00
08	14.00	18.00
09	16.00	20.00
10	18.00	22.00
11	20.00	24.00
12	22.00	26.00
13	24.00	28.00
14	26.00	30.00
15	28.00	32.00
16	30.00	34.00

Ordering Information


G WFA102 - XX XX A 803 E X B X -9B

No. of Pins per Row 02~16 Standard Plating 01=Tin Selective Plating 02=Gold Flash 22=Matte Tin Color 1=Black 2=White Standard Packing N=PE Bag Selective Packing C=Tube



Website:www.greenconn.com
E-mail:sales@greenconn.com

3RD.ANG
PROJ.



PAGE. 1/3

GENERAL TOLERANCE

X.*±5.0*	X.±0.35
.X*±3.0*	.X±0.30
.XX*±2.0*	.XX±0.25
.XXX*±/	.XXX±0.15

DESIGNED: 钟建虾

CHECKED: LINK

APPROVED: LINK

DATE: 2021.08.03

DATE: 2021.08.03

DATE: 2021.08.03

DWG. NO.

GWFA102-CA803

PART NO.

GWFA102-XXXXA803EXBX-9B

TITLE.

PITCH 2.0mm 180° WAFER

REV.	UNIT.	SCALE.
01	mm	1:1