


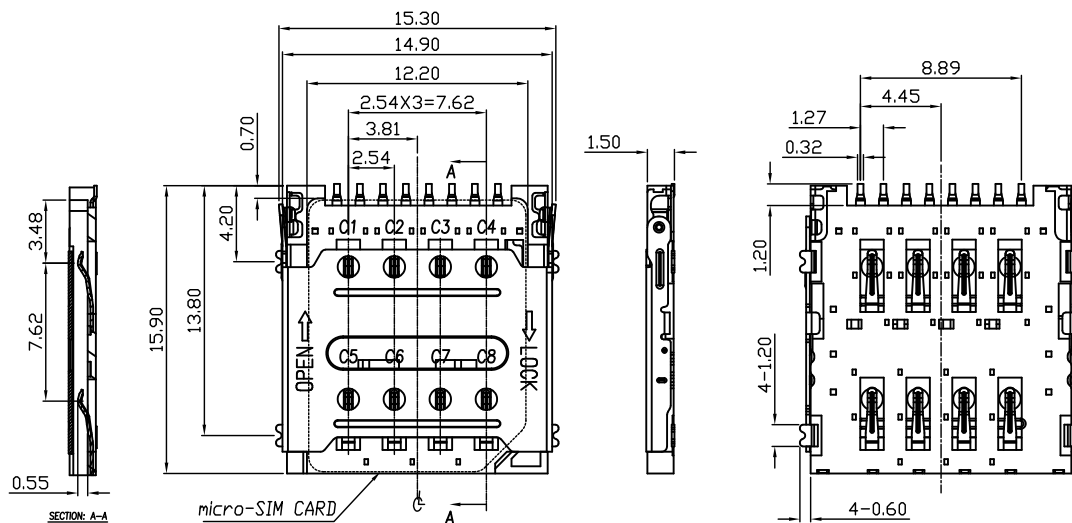

SIM CARD	
Pin No.	NAME
C1	VCC
C2	RST
C3	CLK
C4	RESERVED
C5	GND
C6	VPP
C7	I/O
C8	RESERVED

NOTES:

1. ELECTRICAL CHARACTERISTICS

- 1-1. CONTACT RESISTANCE: 60 Milliohms Max
- 1-2. INSULATION RESISTANCE: 1,000 Megohms Min.
- 1-3. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE.

2. MECHANICAL CHARACTERISTICS




- 2-1. OPERATION TEMPERATURE RANGE: -25°C~+70°C
- 2-2. DURABILITY: 5000 CYCLES

3. MATERIAL:

- 3-1. HOUSING: THERMOPLASTIC, UL 94-V0
- 3-2. TERMINAL: PHOSPHOR BRONZE, T=0.15
- 3-3. SHELL: STAINLESS STEEL, T=0.15

4. FINISHED:

- 4-1. TERMINAL: Ni PLATED UNDER, Au PLATED ON CONTACT AREA, G/F PLATED ON SOLDER TAIL
- 4-2. SHELL: Ni PLATED UNDER, G/F PLATED ON SOLDER TAIL

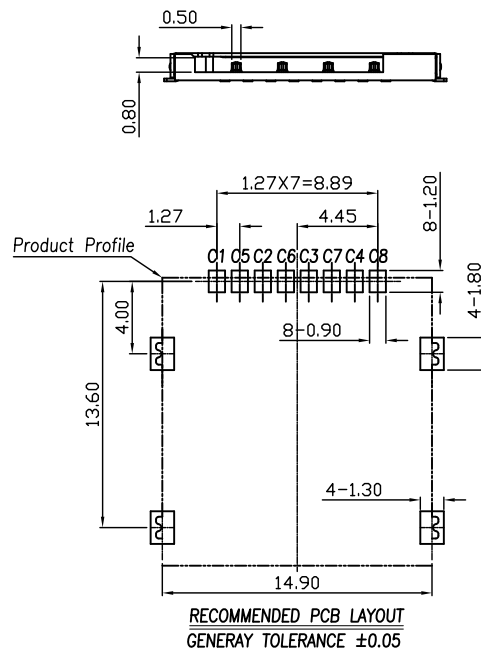

深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2" X.X' ±0.5"	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: MICRO SIM 8P 掀盖 1.5H	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYCW347-SIM08-150B	
 UNIT: mm [inch] SCALE: 1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HYC-2312131558	
			SHEET NO. 1 OF 1	