

MHC2100M03

3dB 90° Hybrid Coupler

Applications

- 1, Low Insertion Loss For Power Combining
- 2, Doherty Power Amplifier
- 3, Small Cell & Pico
- 4, Circular Polarized Antenna

Features

- 1, Low Insertion Loss
- 2, High Isolation, 30 dB typ.
- 3, Excellent high-power Capacity
- 4, RoHS Compliance (Pb-Free)

Description

The MHC2100M03 is a low cost, high performance 3 dB coupler in an easy to use surface mount package. The MHC2100M03 is ideal for Doherty power amplifier, circular polarized antenna and other applications where low insertion loss and tight amplitude and phase balance are required. MHC2100M03 is constructed from ceramic filled PTFE composites which possess excellent electrical and mechanical stability. All components are 100% RF tested.

Characteristics


Table 1. MHC2100M03 Characteristics

Item	Min.	Type	Max.	Unit
Frequency Range	1700		2200	MHz
Isolation	20	22		dB
Insertion Loss		0.2	0.35	dB
Phase Unbalance	-4		+4	degrees
Amplitude	-0.5		+0.5	dB
VSWR (:1)		1.15	1.25	:1
Operating Temp.	-45		+125	°C
Power			50	W

All the above data are based on specified demo board and tested in 25° environment.

PORT CONFIGURATIONS

Figure 1. MHC2100M03 (Top View)

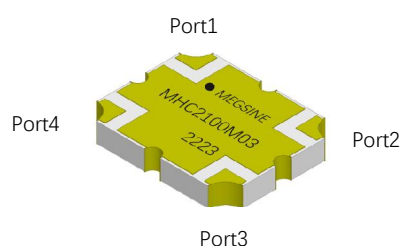

All Use For RF & Microwave

MHC2100M03

3dB 90° Hybrid Coupler




The MHC2100M03 port configurations depending on how input signals are split. The Case 1, Case 2, Case 3, and Case 4, configurations mean that one input signal is split into two output signals. When port 1 is defined, the other ports are defined automatically

Table 2. MHC2100M03 Port Configurations

Configuration	Port 1	Port 2	Port 3	Port 4
Case1.	Input	Isolated	Output -3dB, -90°	Coupling -3dB, 0°
Case2.	Isolated	Input	Coupling -3dB, 0°	Output -3dB, -90°
Case3.	Output -3dB, -90°	Coupling -3dB, 0°	Input	Isolated
Case4.	Coupling -3dB, 0°	Output -3dB, -90°	Isolated	Input

Outline Drawing

Figure 3. MHC2100M03 Outline Drawing

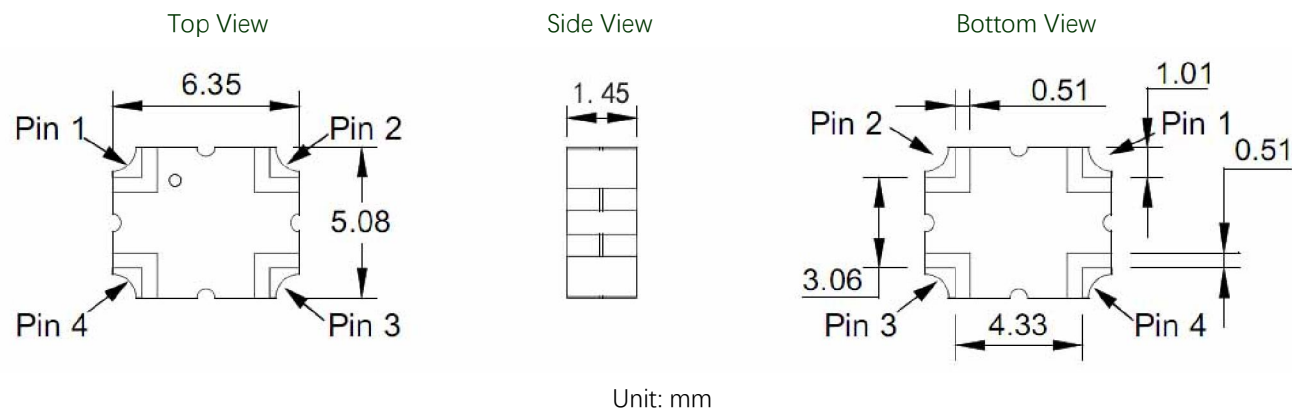

Typical Performance (25°C, 690-1000 MHz)

Figure 4. MHC2100M03 Coupling


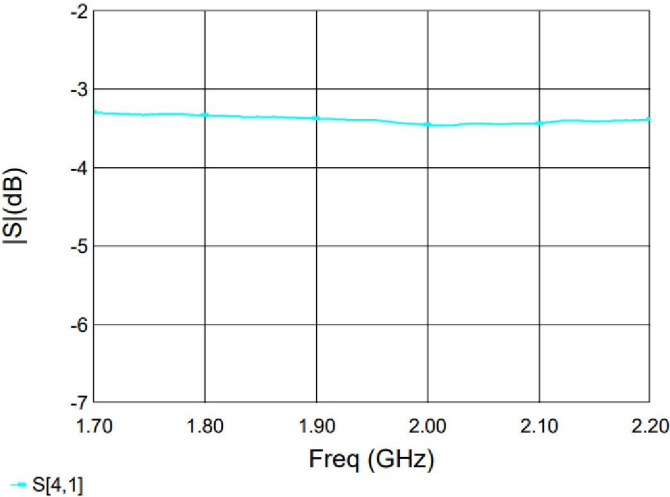


Figure 5. MHC2100M03 Transmission Loss

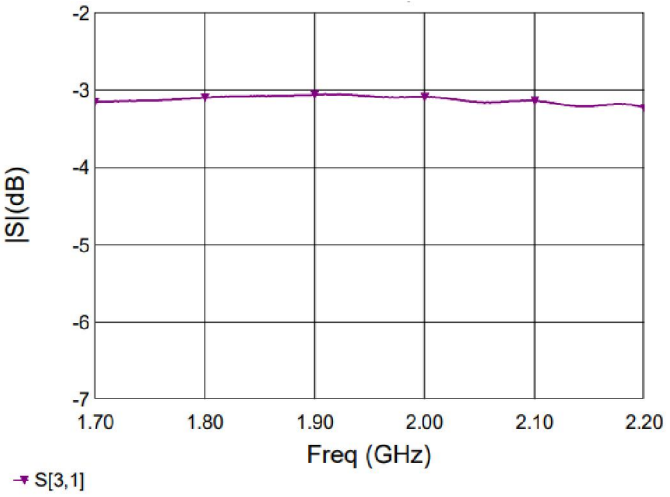

All Use For RF & Microwave

MHC2100M03

3dB 90° Hybrid Coupler



Figure 6. MHC2100M03 Return Loss (S11)

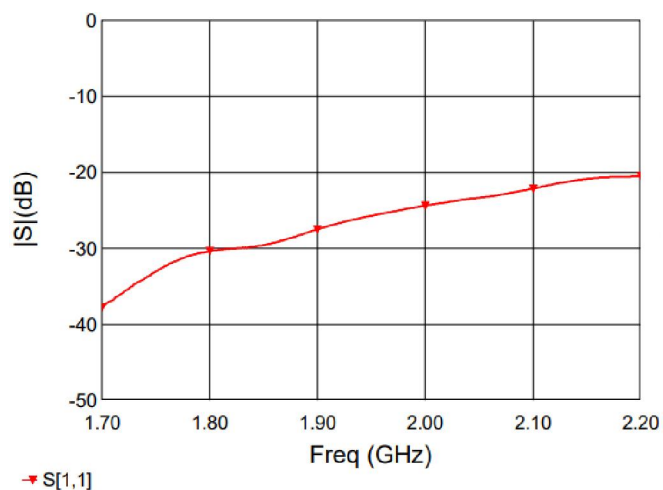


Figure 7. MHC2100M03 Return Loss (S22)

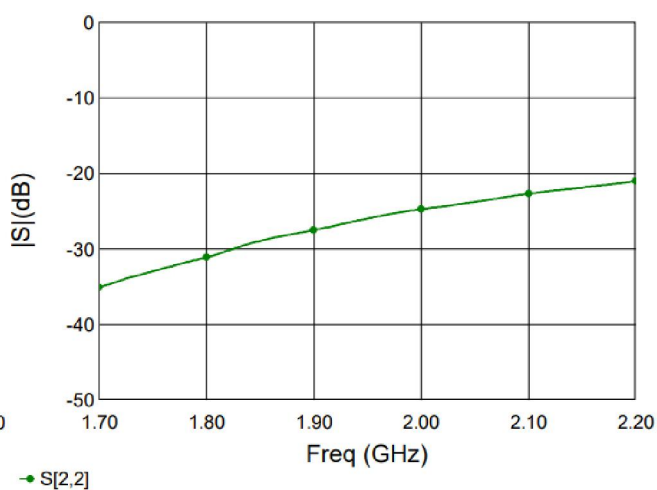


Figure 8. MHC2100M03 Return Loss (S33)

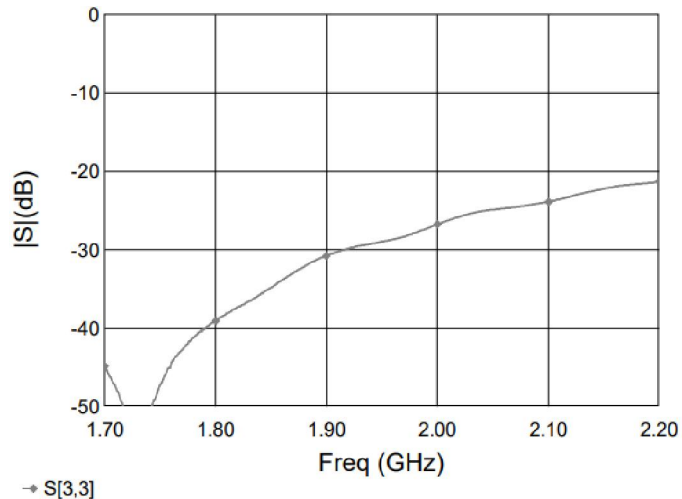


Figure 9. MHC2100M03 Return Loss (S44)

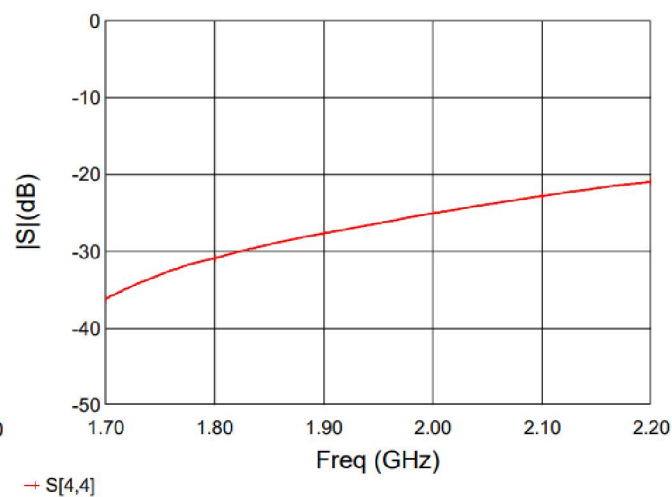


Figure 10. MHC2100M03 Isolation


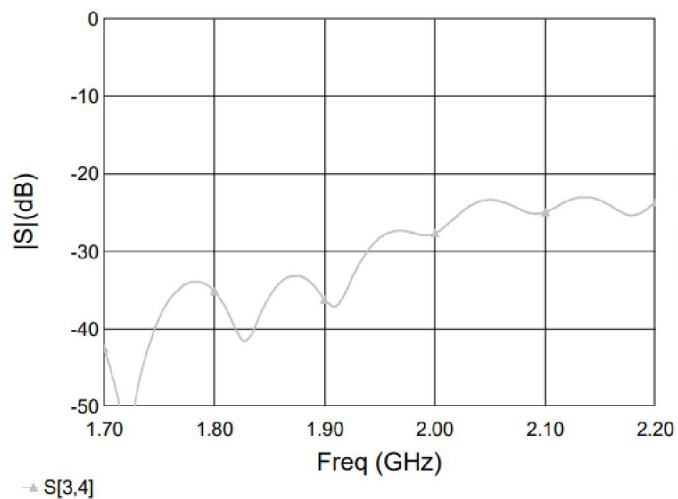


Figure 11. MHC2100M03 Phase

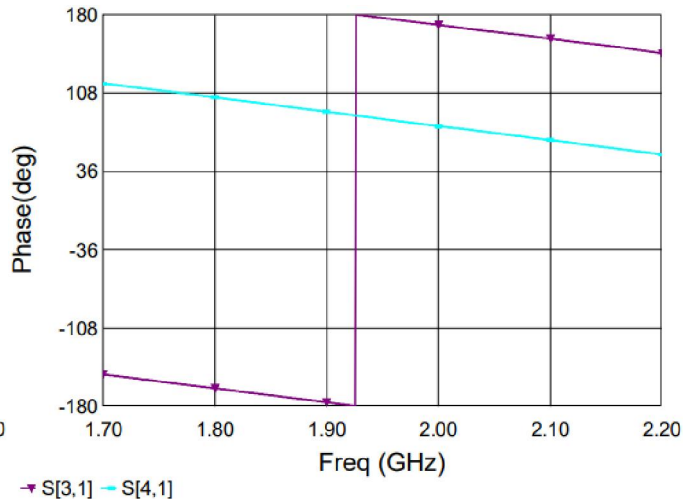

All Use For RF & Microwave

MHC2100M03

3dB 90° Hybrid Coupler




Definition of Measured Specifications

Table 3. Mathematical Formula for the MHC2100M03 Parameters

Parameter	Definition	Mathematical Representation
VSWR (Voltage Standing Wave Ratio)	The impedance match of the coupler to a 50W system. A VSWR of 1:1 is optimal.	$VSWR = \frac{V_{max}}{V_{min}}$ Vmax = voltage maxima of a standing wave Vmin = voltage minima of a standing wave
Return Loss	The impedance match of the coupler to a 50W system. Return Loss is an alternate means to express VSWR.	$\text{Return Loss (dB)} = 20 \log \frac{VSWR+1}{VSWR-1}$
Insertion Loss	The input power divided by the sum of the power at the two output ports.	$\text{Insertion Loss (dB)} = 10 \log \frac{P_{in}}{P_{cp1} + P_{transmission}}$
Isolation	The input power divided by the power at the isolated port.	$\text{Isolation (dB)} = 10 \log \frac{P_{in}}{P_{iso}}$
Phase Balance	The difference in phase angle between the two output ports.	Phase at coupled port – Phase at transmission port
Amplitude Balance	The power at each output divided by the average power of the two outputs.	$10 \log \frac{P_{cp1}}{\frac{P_{cp1} + P_{transmission}}{2}} \text{ and } 10 \log \frac{P_{transmission}}{\frac{P_{cp1} + P_{transmission}}{2}}$

Recommended PCB Layout

Figure 12. MHC2100M03 Recommended PCB Layout

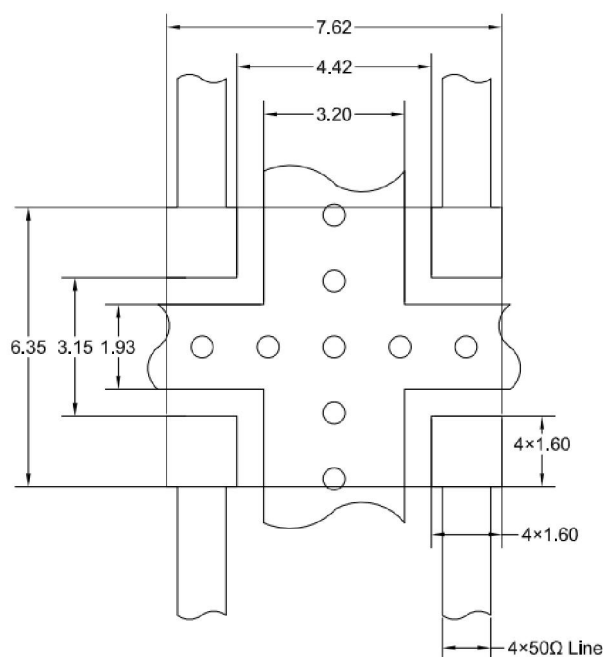

All Use For RF & Microwave


MHC2100M03

3dB 90° Hybrid Coupler




REFLOW PROFILE

Figure 13. MHC2100M03 Thermal Reflow Profile

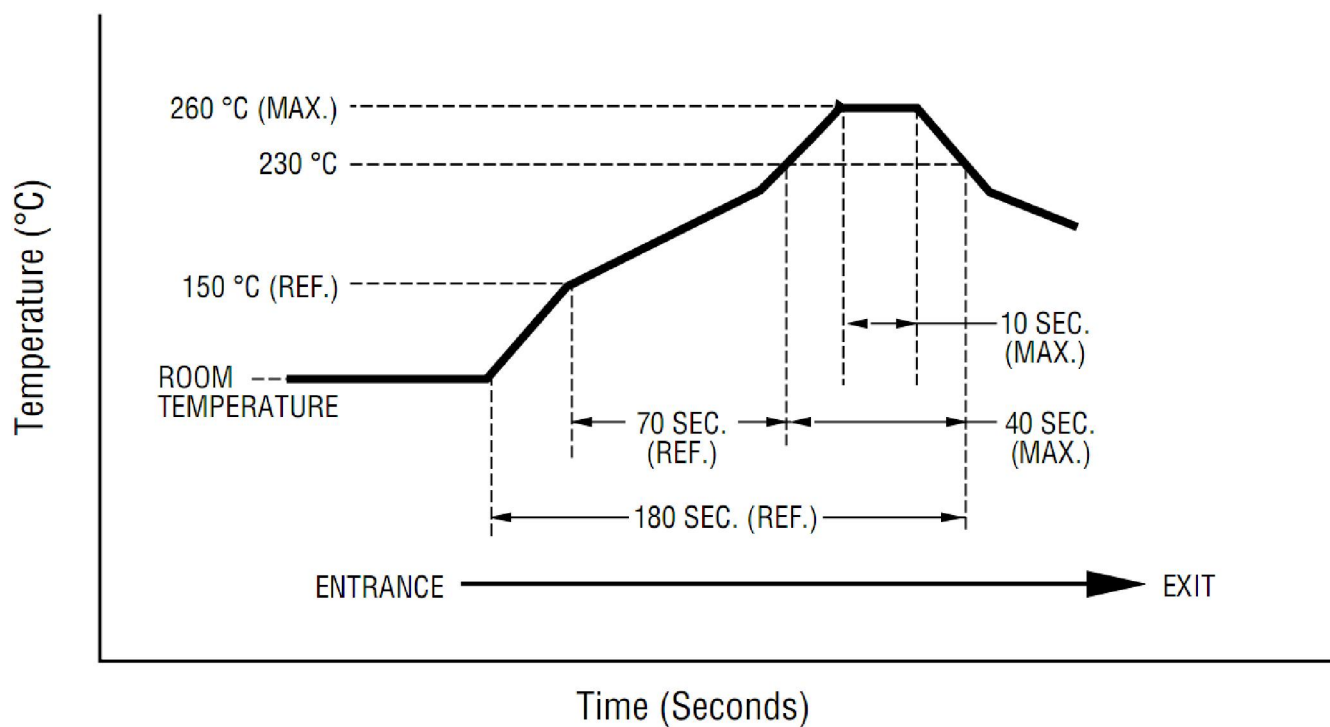

Packaging and Ordering Information

Figure 14. MHC2100M03 Packaging Information

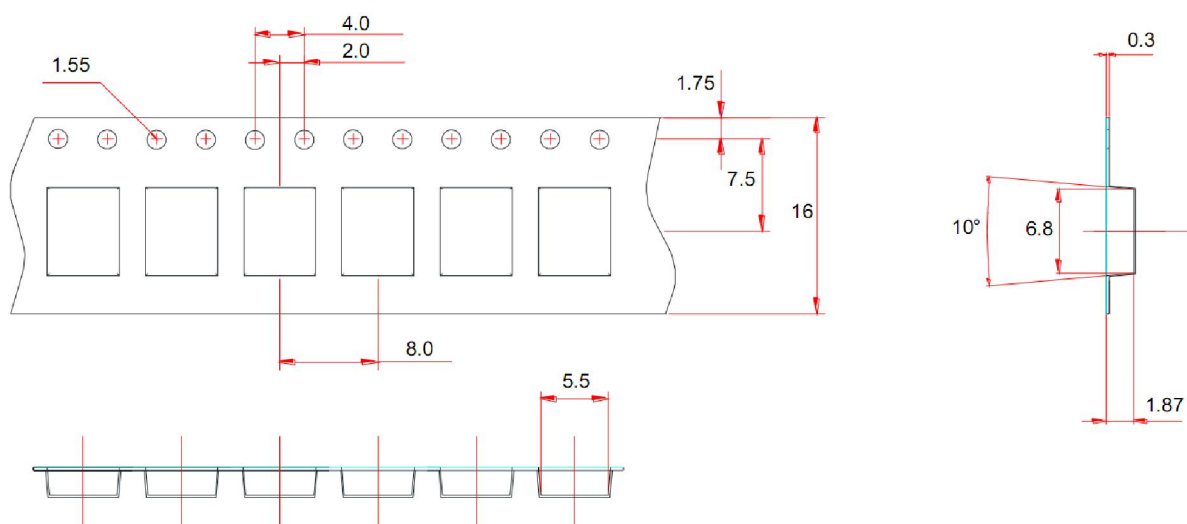

All Use For RF & Microwave

MHC2100M03

3dB 90° Hybrid Coupler

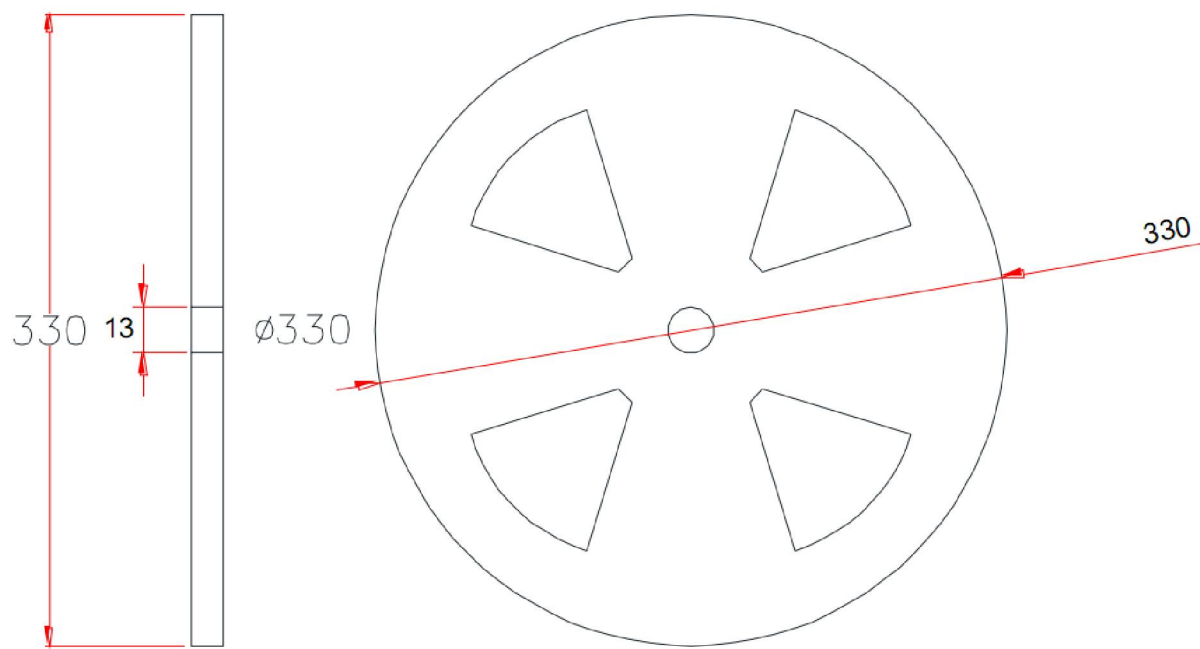


Table 4. MHC2100M03 Ordering Information

Device	Package	Reel	Shipping
MHC2100M03	6.35*5.08mm	7"	1000 Reel

MHC2100M03

3dB 90° Hybrid Coupler



Revision	Description	Date
Rev0	Preliminary	2023/5/29