

SOT-23 Plastic-Encapsulate Regulators

78L05

Three-terminal positive voltage regulator


Features:

Maximum Output current $I_o: 0.1A$

Output voltage $V_O: 5\text{ V}$

Continuous total dissipation

$P_D: 0.25W (T_a = 25^\circ C)$

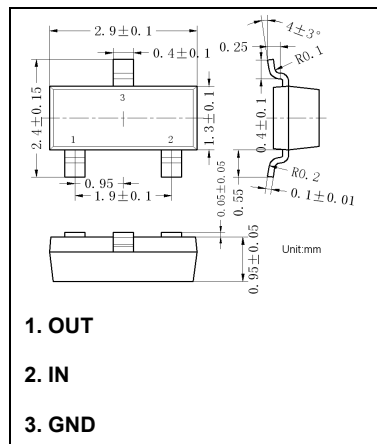

Marking: L05

Absolute Maximum Ratings (Operating temperature range applies unless otherwise specified)


Symbol	Parameter	Value	Unit
V _i	Input Voltage	30	V
T _{OPR}	Operating Junction Temperature Range	0 to +120	°C
T _{STG}	Storage Temperature Range	-55 to +150	°C

Electrical Characteristics at Specified Virtual Junction Temperature

($V_i=10V$, $I_o=40mA$, $C_i=0.33\mu F$, $C_o=0.1\mu F$, unless otherwise specified)

Symbol	Parameter	Test conditions		Min	Typ	Max	Unit
V_o	Output Voltage		25°C	4.8	5.0	5.2	V
		7V≤ V _i ≤20V, I _o =1mA~40mA	0-125°C	4.75	5.0	5.25	V
		I _o =1mA~70mA		4.75	5.0	5.25	V
ΔV_o	Load Regulation	I _o =1mA~100mA	25°C		15	60	mV
		I _o =1mA~40mA	25°C		8	30	mV
ΔV_o	Line Regulation	7V≤ V _i ≤20V	25°C		32	150	mV
		8V≤ V _i ≤20V	25°C		26	100	mV
I_q	Quiescent Current		25°C		3.8	6	mA
ΔI_q	Quiescent Current Change	8V≤ V _i ≤20V	0-125°C			1.5	mA
ΔI_q		1mA≤I _o ≤40mA	0-125°C			0.1	mA
V_N	Output Noise Voltage	f =10Hz to 100KHz	25°C		42		μV
RR	Ripple Rejection	f =120Hz, 8V≤ V _i ≤20V	0-125°C	41	49		dB
V_d	Dropout Voltage		25°C		1.7		V

Typical Application

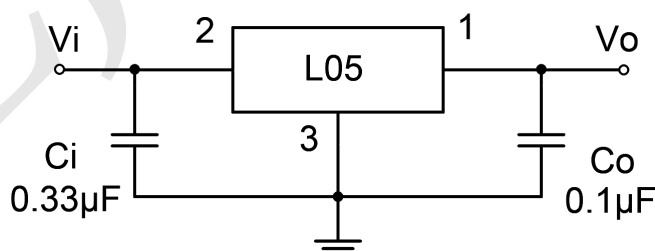

Note: Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulator .

Typical Characteristics

