


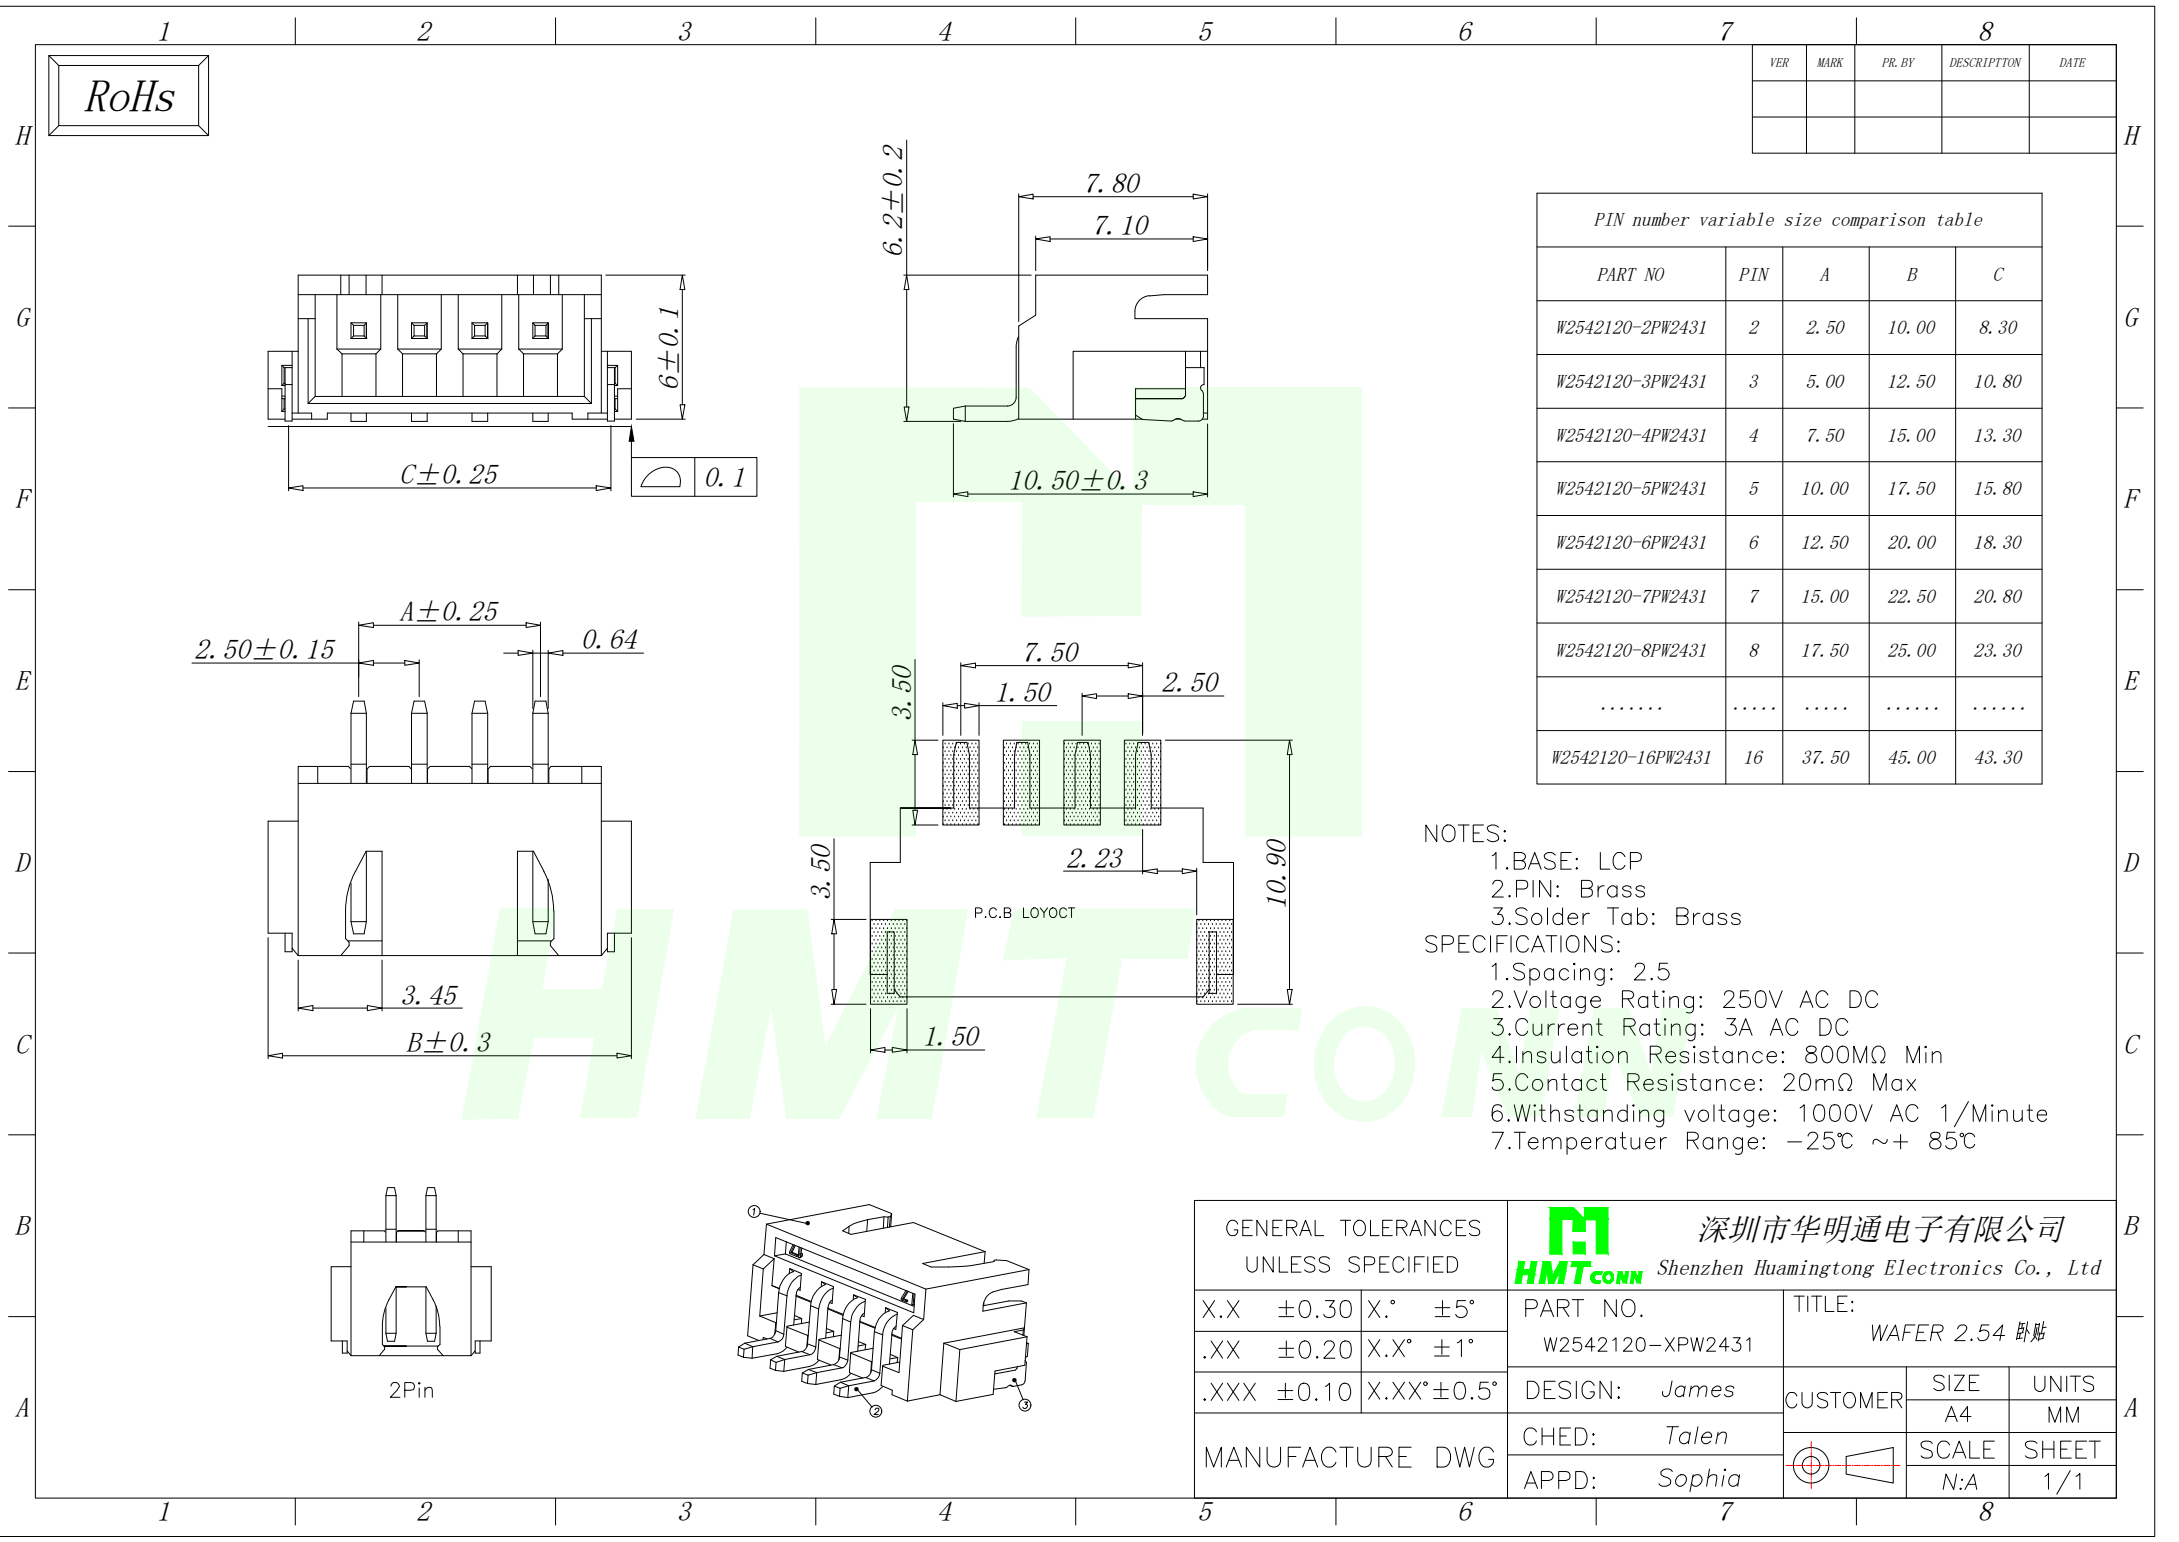


RoHS

VER	MARK	PR. BY	DESCRIPTION	DATE

PIN number variable size comparison table				
PART NO	PIN	A	B	C
W2542120-2PW2431	2	2.50	10.00	8.30
W2542120-3PW2431	3	5.00	12.50	10.80
W2542120-4PW2431	4	7.50	15.00	13.30
W2542120-5PW2431	5	10.00	17.50	15.80
W2542120-6PW2431	6	12.50	20.00	18.30
W2542120-7PW2431	7	15.00	22.50	20.80
W2542120-8PW2431	8	17.50	25.00	23.30
.....				
W2542120-16PW2431	16	37.50	45.00	43.30

NOTES:
1.BASE: LCP
2.PIN: Brass
3.Solder Tab: Brass
SPECIFICATIONS:
1.Spacing: 2.5
2.Voltage Rating: 250V AC DC
3.Current Rating: 3A AC DC
4.Insulation Resistance: 800MΩ Min
5.Contact Resistance: 20mΩ Max
6.Withstanding voltage: 1000V AC 1/Minute
7.Temperatuer Range: -25℃ ~+ 85℃

GENERAL TOLERANCES UNLESS SPECIFIED		 深圳市华明通电子有限公司 Shenzhen Huamingtong Electronics Co., Ltd	
X.X ±0.30	X.° ±5°	PART NO.	TITLE:
.XX ±0.20	X.X° ±1°	W2542120-XPW2431	WAFER 2.54 卧贴
.XXX ±0.10	X.XX° ±0.5°	DESIGN: James	CUSTOMER
MANUFACTURE DWG		CHED: Talen	SIZE A4
		APPD: Sophia	UNITS MM
			SCALE N:A
			SHEET 1/1