

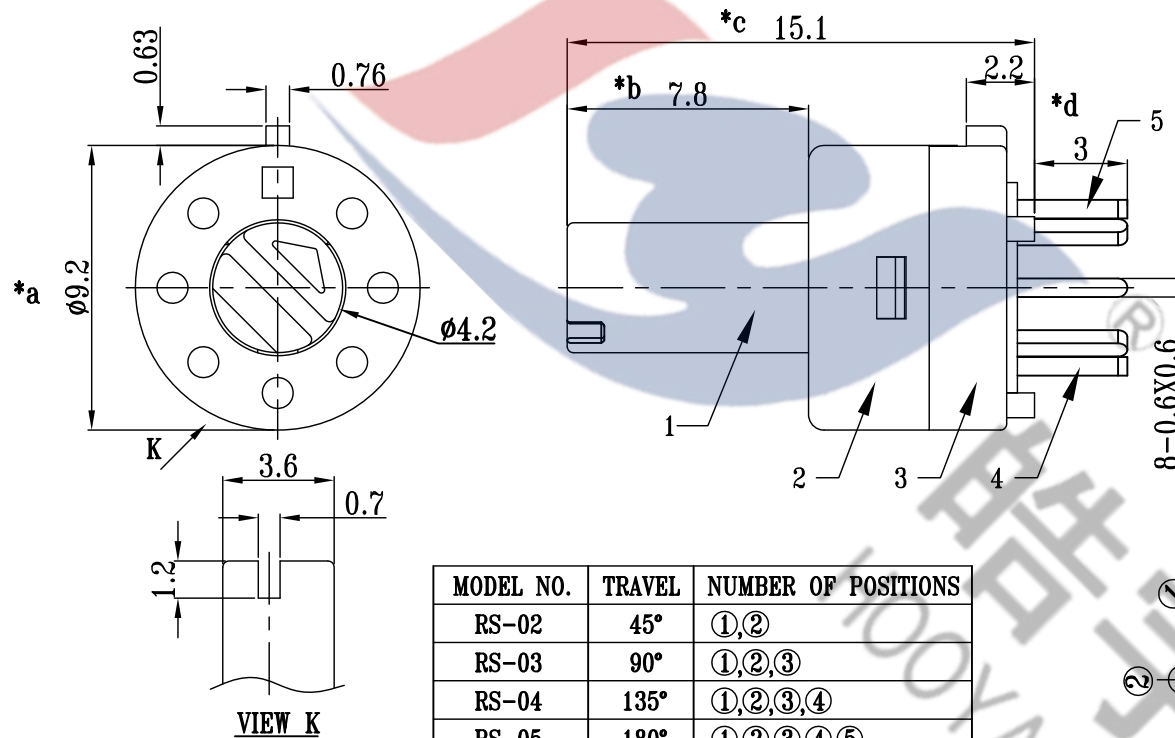



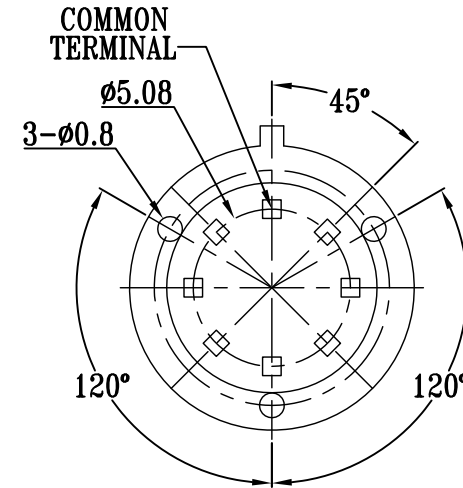

MODEL NO.	TRAVEL	NUMBER OF POSITIONS
RS-02	45°	①,②
RS-03	90°	①,②,③
RS-04	135°	①,②,③,④
RS-05	180°	①,②,③,④,⑤
RS-06	225°	①,②,③,④,⑤,⑥
RS-07	270°	①,②,③,④,⑤,⑥,⑦
RS-08	315°	①,②,③,④,⑤,⑥,⑦,⑧

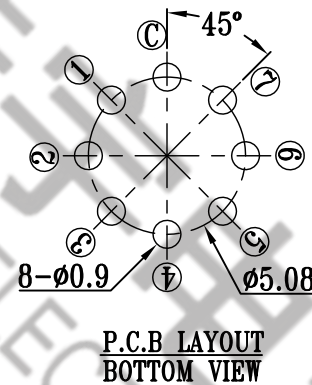

ELECTRICAL RATING: 0.5A 24V DC ; 0.2A 48V DC
CONTACT RESISTANCE: 100mΩ MAX
INSULATION RESISTANCE: 100MΩ MIN. 500V DC
DIELECTRIC STRENGHT: 500V AC FOR 1 MINUTE
OPERATING FORCE: 300 ± 150gf
OPERATING LIFE: 10000 cycles
OPERATING TEMPERATURE RANGE: -20 C ~ +70 C

[illegible]