


A-CODE FEMALE INTERFACE

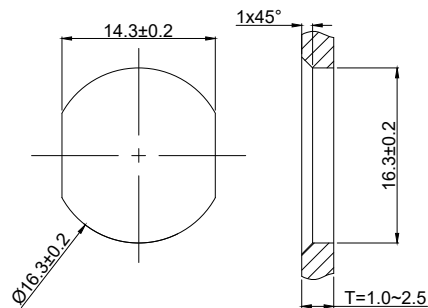

PANEL CUT OUT





NOTE:

- ELECTRICAL:
 - CONTACT RESISTANCE: $\leq 15\text{m}\Omega$
 - INSULATION RESISTANCE: $\geq 100\text{M}\Omega$
- ENVIRONMENTAL:
 - OPERATING TEMPERATURE: -25°C TO $+85^{\circ}\text{C}$
 - PROTECTION GRADE: IP67, WHEN TIGHT LOCKED
 - POLLUTION DEGREE: 3
- CONTACT MATERIAL: BRASS NI PLATED UNDER GOLD PLATED
- CONFORM TO IEC 61076-2-101

* UNLESS OTHERWISE SPECIFIED
TOLERANCES ON DECIMAL IS:

X.	± 0.50	X°	$\pm 2^{\circ}$
X.X	± 0.30		
X.XX	± 0.20		

POLE	03	04	05	06	07	08
CONDUCTOR CROSS-SECTION	20~24AWG 0.5~0.25mm ²	20~24AWG 0.5~0.25mm ²	20~24AWG 0.5~0.25mm ²	24AWG 0.25mm ²	24AWG 0.25mm ²	24AWG 0.25mm ²
RATED VOLTAGE	250V	250V	60V	30V	30V	30V
RATED CURRENT	4A	4A	4A	2A	2A	2A
RATED IMPULSE VOLTAGE	2.5KV	2.5KV	1.5KV	0.8KV	0.8KV	0.8KV

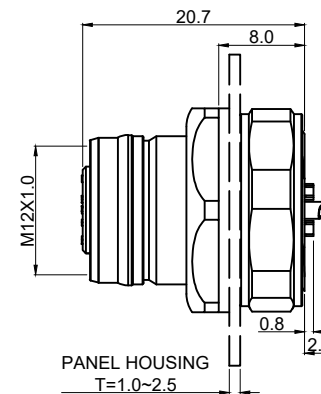

All dimensions
are in mm

Material:

Finishing:

Phase Marking

Weight

Scale



拓宜(上海)工控电器设备有限公司
Topone(Shanghai) Industrial Control Electrical Equipment Co., LTD.

Part Name:
C12B-FSA-RM1-8SCUP

Rev.
01

Page:
1 OF 1

	Signature	Date
Created by		
Checked by		
Approved by		
State	First Release	

P/N
61037207

MD/CD