
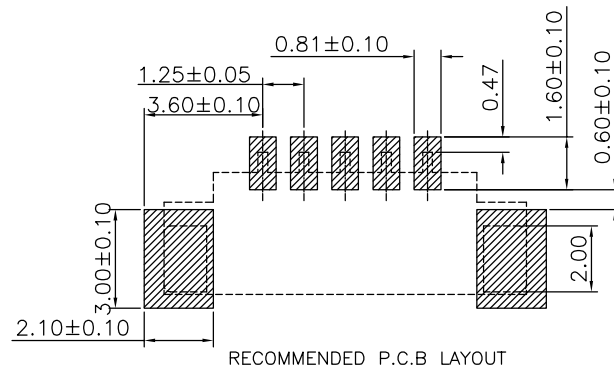

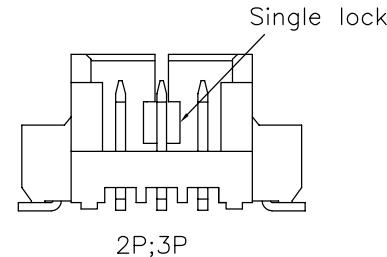
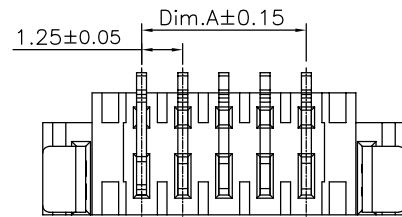

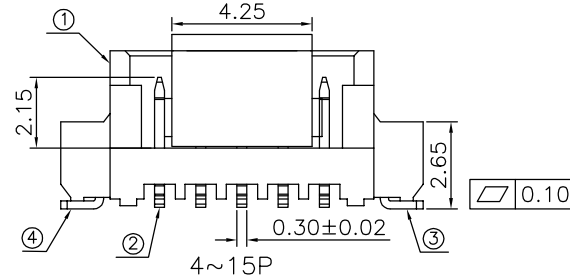



Rohs

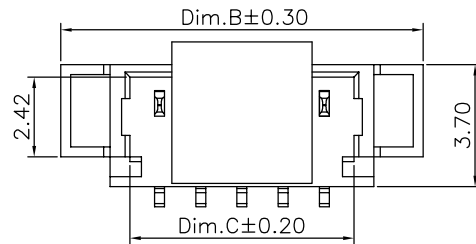

NOTE(UNLESS OTHERWISE SPECIFIED):

1. ALL MATERIAL MUST BE COMPLY WITH ROHS.

2. PRODUCT PERFORMANCE:

2.1 RATED VOLTAGE(MAX.):125V AC/DC

2.2 RATED CURRENT(MAX.):1.0A AC/DC

2.3 DIELECTRIC STRENGTH:250V AC/MINUTE

2.4 INSULATION RESISTANCE:100 MΩ MIN.

2.5 CONTACT RESISTANCE:20 mΩ MAX.

2.6 OPERATING TEMPERATURE:-40°C TO +85°C

3.APPLICABLE WIRE: CONDUCTOR SIZE/ AWG #32 TO #28
INSULATION O.D./ 0.5 TO 0.9mm

4.PART NO. : 1WF03-216 0XX-0000X

WATER CODE
SUCH AS 5PIN:005

Dimension:

Pos	DimA	DimB	DimC
2	1.25	7.25	3.05
3	2.50	8.50	4.30
4	3.75	9.75	5.55
5	5.00	11.00	6.80
6	6.25	12.25	8.05
7	7.50	13.50	9.30
8	8.75	14.75	10.55
9	10.00	16.00	11.80
10	11.25	17.25	13.05
11	12.50	18.50	14.30
12	13.75	19.75	15.55
13	15.00	21.00	16.80
14	16.25	22.25	18.05
15	17.50	23.50	19.30

PIN	WATER CODE	NOTES
2	00002	NYLON NATURAL
3	00002	NYLON NATURAL
4	00002	NYLON NATURAL
5	00002	NYLON NATURAL
6	00002	NYLON NATURAL
8	00002	NYLON NATURAL
9	00002	NYLON NATURAL

5.0			
4.0	23.04.01	PRODUCT LABELING ADJUSTMENT	ShunMingWen
3.0	22.03.10	MODIFY PRODUCT NUMBER	ShunMingWen
2.0	16.05.23	New material	Tianhai
1.0	15.11.16	NEW	Tianhai
NO.	DATE	DESCRIPTION	APPROVAL

DRAWING:	
ShunMingWen	
CHECKED:	
Tian hai	
APPROVAL:	
Cykin	

GENERAL TOLERANCE


.X:=±0.30 .X*:=±2*
.XX:=±0.20 .XX*:=±1*
.XXX:=±0.10 .XXX*:=±0.5*

UNIT: MM

PROJECTION:

SCALE: N/A

SHEET: 1/1

**CHIN-BAN**
Electronic Technology

DESCRIPTION: 1.25mm Wafer Straight SMT Type

PART NO: 1WF03-2160XX-0000X

REV: 4.0

OLD CODE: WB1251US-XXTX-X

DRAWING NO: UK0245

SIZE: A4