HVC CAPACITOR MANUFACTURING CO., LTD 赫威斯电容器制作有限公司



陶 瓷 電 容 器 Ceramic Disc Capacitor

Reference Specification

High Voltage Ceramic Capacitor HVC-6KV-DL14-F10-102K Issued Date: Dec 16,2023

Engineering Department

HVC Capacitor Manufacturing Co.,Ltd.

⚠ CAUTION

1.OPERATING VOLTAGE

When DC- rated capacitors are to be used in AC or ripple current circuits, be sure to maintain the Vp-p value of the applied voltage or the Vo-p which contains DC bias within the rated voltage range. When the voltage is started to apply to the circuit or it is stopped applying, the irregular voltage may be generated for a transit period because of resonance or switching. Be sure to use a capacitor within rated voltage containing these irregular voltage.

Voltage	DC Voltage	DC+AC Voltage	AC Voltage	Pulse Voltage(1)	Pulse Voltage(2)
Positional Measurement	Vo-p	Vo-p	Vp-p	Vp-p	Vp-p

2. OPERATING TEMPERATURE AND SELF-GENERATED HEAT

Keep the surface temperature of a capacitor below the upper limit of its rated operating temperature range. Be sure to take into account the heat generated by the capacitor itself. When the capacitor is used in a high-frequency current, pulse current or the like, it may have the self-generated heat due to dielectric-loss. Applied voltage should be the load such as self-generated heat is within 5 °C on the condition of atmosphere temperature 25 °C. When measuring, use a thermocouple of small thermal capacity-K of ϕ 0.1mm and be in the condition where capacitor is not affected by radiant heat of other components and wind of surroundings.

Excessive heat may lead to deterioration of the capacitor's characteristics and reliability.(Never attempt to perform measurement with the cooling fan running. Otherwise, accurate measurement cannot be ensured.)

3. OPERATING AND STORAGE ENVIRONMENT

The insulating coating of capacitors does not form a perfect seal; therefore, do not use or store capacitors in a corrosive atmosphere, especially where chloride gas, sulfide gas, acid, alkali, salt or the like are present. And avoid exposure to moisture. The capacitor is designed to be used in the insulating media, such as epoxy resin, silicone oil, etc.. There must be 3mm or more insulating media for each direction of the capacitor. In case of cleaning, bonding, or molding this product, verify that these processes do not affect product quality by testing the performance of a cleaned, bonded or molded product in the intended equipment. Store the capacitors where the temperature and relative humidity do not exceed -10 to 40 °C and 15 to 85 %. Use capacitors within 6 months after delivered.

4. VIBRATION AND IMPACT

Do not expose a capacitor or its leads to excessive shock or vibration during use.

5. SOLDERING

When soldering this product to a PCB/PWB, do not exceed the solder heat resistance specification of the capacitor. Subjecting this product to excessive heating could melt the internal junction solder and may result in thermal shocks that can crack the ceramic element.

When soldering capacitor with a soldering iron, it should be performed in following conditions.

Temperature of iron-tip: 400 °C max. Soldering iron wattage: 50W max. Soldering time: 3.5s max.

Failure to follow the above cautions may result, worst case, in a short circuit and cause fuming or partial dispersion when the product is used.

6. Limitation of Applications

Please contact us before using our products for the applications listed below which require especially high reliability for the prevention of defects which might directly cause damage to the third party's life, body or property.

①Aircraft equipment ②Aerospace equipment

3Undersea equipment

4 Power plant control equipment

®Transportation equipment(vehicles, trains, ships, etc.)

Traffic signal equipment

®Disaster prevention / crime prevention equipment

@Application of similar complexity and/or reliability requirements to the applications listed in the above.

NOTICE

Cleaning

To perform ultrasonic cleaning, observe the following conditions.

Rinse bath capacity: Output of 20 watts per liter or less.

Rinsing time: 5min maximum.

Do not vibrate the PCB/PWB directly.

Excessive ultrasonic cleaning may lead to fatigue destruction of the lead wires.

Capacitance change of capacitor

Class 1 capacitors

Capacitance might change a little depending on a surrounding temperature or an applied voltage. Please contact us if you use for the strict time constant circuit.

· Class 2 and 3 capacitors

Class 2 and 3 capacitors like temperature characteristic B, E and F have an aging characteristic, whereby the capacitor continually decreases its capacitance slightly if the capacitor leaves for a long time. Moreover, capacitance might change greatly depending on a surrounding temperature or an applied voltage. So, it is not likely to be able to use for the time constant circuit. Please contact us if you need a detail information.

⚠ NOTE

- 1. Please make sure that your product has been evaluated in view of your specifications with our product being mounted to your product.
- 2. You are requested not to use our product deviating from the agreed specifications.

1. Application

This specification is applied to high voltage ceramic capacitor used for in high voltage electric equipment.

2. Rating

2.1 Operating temperature

2.2 Part unmber

HVC	6KV	DL	14	F	10	102	K
Brand	Rated Voltage	N4700	Diameter(mm)	Pitch	Lead spacing	Cap.	Tol.

• Temperature characteristic

Temperature	characteristic
N47	'00

Rated voltage

Rated voltage
DC6kV

Capacitance

The first two digits denote significant figures; the last digit denotes the multiplier of 10 in pF. ex.) In case of 1000.

$$10 \times 10^2 = 1000 \text{ pF}$$

Capacitance tolerance

Please refer to [4. Part number list].

· Lead style

	Lead style				
	Straight long				
Please refer to [4. Part number list].					

Solder coated copper wire is applied for termination.


Packing type

King type	
	Packing type
	Bulk


Individual specification

In case part number cannot be identified without 'individual specification', it is added at the end of part number.

- 3.2 Marking
 ① Brand
 ② Rated Voltage
 ③ Capacitance and Tolerance
 ④ Temperature Characteristic



4.Part number List

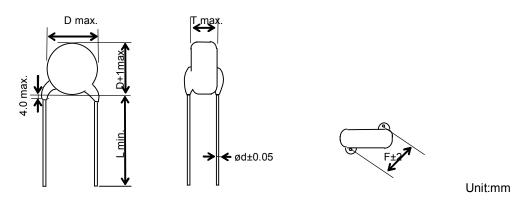

remp. Cap.		Cap. tol. Customer part number	HVC Part number	DC Rated. Dimensions (mm)					ı	Pack		
Char. (pF)	(pF)	(%)		TIVOT dictialises	volt. (kV)	D	T	F	L	d	qty.	qty.
N4700	1000	±10		HVC-6KV-DL14-F10-102K	6	14	6	10	20	0.6		500

5.TEST

5-1VISUAL EXAMINATION CHECK OF DIMENSIONS

Dissipation Factor

Temperature Characteristic

(D.F.)

No	o. ITEM		SPECIFICATION	TESTING METHOD
1	Appearance dimensions		See 3,4.	Shall be visually examined or Venire Calipers.
2	Marking		To be easily legible.	Shall be visually examined.
5-2	2ELECTRICAL PE	RFORMANCE T	ESTS	
1	Dielectric Strength	Between Lead wires Body insulation	No failure	The capacitors shall not be damage when DC voltage of 150% of the rated voltage are applied between the lead wires for 60 s in insulate liquid or gas. (Charge/discharge current: 50mA max.) The capacitors is placed in the container with metal balls of diameter 1mm so that each lead wires, Short-circuited, is kept approximately 2mm off the balls as shown in the figure, and DC voltage of 15kV is applied for 10 s between capacitor lead wires and small metals. (Charge/discharge current: 50mA max.)
2	Insulation Resistance (I.R.)	Between Lead wires	200,000 M Ω min.	The insulation resistance shall be measured with DC 1kV within 60±5 s of charging.
3	Capacitance		Within the specified tolerance.	

Same condition as capacitance.

3 shall not exceed the limit specified.

N4700

The capacitance measurement shall be made at each step specified in table. Capacitance change from the value of step

5

20±2°C 85±2°C 20±2°C

0.2% max.

-4700ppm/ °C

5-3 MECHANICAL PERFORMANCE TESTS

		IN ONWANCE I		
No.	ITE		SPECIFICATION	TESTING METHOD
1	Strength of Lead	Pull		Fix the body of capacitor, apply a tensile weight gradually to each lead wire in the radial direction of capacitor up to 10N, and keep it for 10±1 s.
		Bending		Each lead wire shall be subjected to 5N weight and then a 90° to bend, at the point of egress, in one direction, return to original position, and then a 90° bend in the opposite direction at the rate of one bend in 2 to 3 s.
2	2 Solderability of Leads		with uniformly coated on the	The lead wire shall be dipped into a 25% methanol solution of rosin and then into molten solder of 235±5°C for 2±0.5 s. In both cases the depth of dipping is up to about 1.5 to 2.0mm from the root of lead wires.
3	Soldering Effect	Appearance Capacitance Change Dielectric Strength (Between lead wires)	No marked defect. Within±10% No failure	The lead wires shall be immersed into the melted solder of 350±10°C up to about 1.5 to 2.0mm from the main body for 3.5±0.5 s. Post-treatment: Capacitor shall be stored for 24±2 h at room condition.



HVC CAPACITOR MANUFACTURING CO., LTD 赫威斯电容器制作有限公司

公司简介

赫威斯电容器(HVC Capacitor)制作有限公司为港资企业,成立于 2012 年 1 月,为拥有 20 多年生产高压陶瓷产品台系厂商成立的出口运营品牌,生产基地位于东莞虎门,产品 95%出口。

赫威斯电容器专业生产高压陶瓷电容,蓝色陶瓷片型和螺栓型陶瓷电容,其中陶瓷片电容电压做到 2KV 到 50KV,拥有 独特专利的 N4700 军工级别陶瓷介电材质 (N4700 材质 6KV 到 40KV),主要应用在高端医疗电子设备,如 CT,医疗 X 光机,C 型臂,DR 机,牙医 X 光机,机场安检,无损检测,静电除尘设备等等。螺栓型陶瓷片电容主打 N4700 材质,电压范围 10KV 到 150KV,外形为黑色环氧树脂包封。主要客户为通用电气,柯尼卡美能达,日立 ABB, 尼康,西门子,美国强生,美国贝克休斯等知名 500 强企业和众多纳斯达克上市医疗设备公司。

用中国产军工级别材质生产达到外国高端工业水准的电子零件,是赫威斯公司的经营方针和一贯追求。2017年起至今,美日欧品牌如日本村田,美国 AVX,美国威世纷纷由于商业考量和疫情原因退出市场造成供需缺口,赫威斯电容很好地承接了国际高压设备客户的需求。2018年起赫威斯公司采用收购和合作方式,建立高压电容相搭配的高压二极管和高压厚膜电阻产品线,也逐渐获得高压设备客户的认可。

赫威斯公司现有国外代理商伙伴分布在德国、法国、英国、美国、日本、韩国、印度、俄罗斯。 为应对中国市场外资工厂的需求,也设立了中国代理商,国内外代理商主要由赫威斯公司指派跟 进当地重点客户。 我司的目标是成为高压电子零件行业知名的新兴品牌。

HVC Capacitor is HongKong owned manufacturing company, with over 20 years production experience in high voltage ceramic capacitors field. Our plant located in Dongguan City, Southern China. Currently, 95% of HVC product are exported, HVC capacitor also has significant present in domestic market.

HVC Capacitor specializes in producing both lead type ceramic disc capacitors (blue color) and screw terminal type ceramic capacitors(black resin). For ceramic disc type available voltage from 2KV to 50KV (patent N4700 material) Typical applications including Medical X-ray machines, C-arm, DR(digital radiography), Dental X-ray, Security scanner, NDT(Industrial Non-destructive testing), electrostatic precipitator, and negative lon machines etc.For screw terminal caps, HVC Capacitor also using N4700 ceramic dielectric, available voltage ranging from 10KV to 150KV. Key customers include GE Healthcare (General Electric), Konica Minolta, Hitachi ABB, Nikon, Siemens, Johnson & Johnson, Baker Hughes, and other Fortune 500 companies. HVC Capacitor's screw terminal products has approved by numbers of NASDAQ-listed medial machine companies.

HVC using Chinese military-grade ceramic dielectric to build capacitor, to meet foreign high end industrial quality demands. Since 2017, HVC Capacitor has successfully replaced Japanese **Murata** and American **Vishay** and **AVX**, who facing obsoleted and supplement and costing problem. HVC Capacitor also builds own brand high voltage diodes(HVD series) and high voltage thick film resistors(HVR series) to meet customer complementary requirements. HV diodes matching up with high voltage ceramic capacitor to build up voltage multiplier circuit, which is essential for high voltage power supply. HVC's HVD series diode has already been approved by important European, USA, and Japanese end user.

HVC Capacitor has established an international distribution channel in advance industrial countries, such as Germany, France, U.K., U.S.A, Japan, Korea, India, and Russia. In U.S. market, HVC cooperates with global top electronic component distributors like **AVNET**, **Digi-Key**, **Bisco Industries**, **IBS electronics**. HVC also signed up two Chinese domestic distributors to handle requirement from local EMS/OEM.

HVC Capacitor strive to be well-known emerging brand in high voltage component industry.

HVC CAPACITOR MANUFACTURING CO., LTD 赫威斯电容器制作有限公司



INTERNATIONAL DISTRIBUTION



CHINA

SUZHOU SUNLIT ELECTRONIC CO.,LTD

苏州工业园区通园路398号海逸大厦A401

TEL:(+86)-512-6288-4061

FAX:(+86)-512-6288-4062

CONTACT:Mr.David Liu

EMAIL:Dsq@sz-sunlit.com



KOREA

BLUE & GREEN TRADING CO.,LTD.

Room#A-512B Woolim Lion's Valley

371-28 Gasan-dong, Gumchun-gu, Seoul, Korea

TEL:(+82) 2 2026 4440

FAX:(+82) 2 2026 4443

CONTACT:Ms.Chang Mee

EMAIL: chang@BlueAndGreen.co.kr



GERMANY

AMEC GmbH

Langer Acker 32.

30900 Wedemark, Germany

TEL: (+49) (5130) 58642-22

FAX: (+49 (5130) 58642-10

CONTACT:Mr.Marcel Fehrmann

EMAIL: Marcel.Fehrmann@amec-gmbh.de



名古屋理研電具株式会社

愛知県名古屋市昭和区檀渓通1-20


〒466-0842

TEL: (+81) 052-833-1248

FAX: (+81) 052-833-2640

連絡先: Mr. 古田

EMAIL:furuta@nagoya-riken.co.jp



ETRONICS

8,rue Temara B.P. 80875

78100 Saint Germain en Laye, France

TEL: (+33) 01.39.10.29.00

MOB: (+33) 06.42.20.44.43

CONTACT:Mr.Hampton RUCKLI

EMAIL: hampton.ruckli@etronics.fr



ASHLEA COMPONENTS LTD.

Technology House Unit 24a, Shrivenham

Hundred Business Park Watchfield Swindon SN6 8TZ ,UK.

TEL: (+44)(0)1793 786027

FAX: (+44)(0)1793 783646

CONTACT:Ms. Emma Packford-Garrett

EMAIL: Emma.Packford-Garrett@ashlea.co.uk



U.S.A **BISCO INDUSTRIES**

1328 Blue Oaks Blvd Ste 120 Roseville,

CA 95678, U.S.A

TEL:(+1)-916-773-1634 FAX:(+1)-714-876-2493

CONTACT:Mr.Tom Allan

EMAIL: tallan@biscoind.com

IBS ELECTRONIC, INC 3506D West Lake Center Drive Santa Ana, CA 92704 United States

MIRA KONDENSATOREN GmbH

TEL:(+49) (0) 70 31 - 70 29 91 - 9

FAX:(+49) (0) 70 31 - 70 29 91 - 5

Weilemer Weg 35, 71155 Altdorf, Germany

EMAIL: a.fonas@mira-kondensatoren.de

CONTACT:Ms.Andrea Fonas / Mr.Thomas Gampe

Tel: (+1)-800-717-6475 Fax: (+1)-800-824-7668 CONTACT:Sales Team

EMAIL:simon@ibselectronics.com



APPLICATION

Electrostatic Spraying Equipment



Welding Equipment





Negative Ion Generator



Medical Equipment(CT)





Tesla Coil





Power Electronic Equipment







HVC CAPACITOR MANUFACTURING CO., LTD 赫威斯电容器制作有限公司

KEY CLIENTS




































HVC CAPACITOR MANUFACTURING CO., LTD 赫威斯电容器制作有限公司



Ceramic Disc Style

Ceramic Disc Capacitors Class 1 and 2, 1 kV_{DC} to 50 kV_{DC} , General Purpose

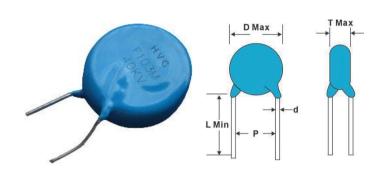

Capacitors with 7.5 mm (0.30") to 15 mm (0.40") lead spacing(P)

QUICK REFERENCE DATA					
DESCRIPTION	UJ,SL,X5F,X7R,N4700,Y5T,Y5U,Y5V				
Voltage (V _{DC})	1000 to 50000				
Min. Capacitance (pF)	10				
Max. Capacitance (pF)	33 000				
Mounting	Through hole				

OPERATING TEMPERATURE RANGE

Class 1: SL, - 40 °C to +85 °C

Class 1: N4700, - 25 °C to + 100 °C

Class 2: Y5T, Y5U, Y5V, - 25 °C to + 85 °C

Class 2: X7R, -40 °C to + 125 °C

TEMPERATURE COEFFICIENTS

Class 1 SL, N4700

Class 2 X7R, Y5P, Y5T, Y5V, X5F, Y5U

CAPACITANCE RANGE

10 pF to 33 000 pF

RATED DC VOLTAGE

1 kV to 50 kV

DIELECTRIC STRENGTH

150 % of rated voltage (10 kV to 50 kV)

FEATURES

- Low losses
- High stability
- · High capacitance in small size
- Kinked (preferred) or straight leads



• Compliant to RoHS directive 2002/95/EC

APPLICATIONS

- DC high voltage
- Pulse high voltage
- SMPS
- HV power supply
- HF ballast

DESIGN

The capacitors consist of a ceramic disc both sides of which are silver-plated. Connection leads are made of tinned

The capacitors may be supplied with kinked or straight leads with a lead spacing of 5 mm (0.20"), 7.5 mm (0.30") or 10 mm (0.40") and a lead length from 4 mm to 30 mm. The standard tolerance on capacitance is 5 % or 10 % for class 1 capacitors and \pm 10 % or \pm 20 % for class 2 capacitors. Encapsulation is made of blue-colored epoxyresin.

INSULATION RESISTANCE AT 500 VDC

N4700: >= 200 000 MΩ UJ,SL,X5F,X7R,Y5T: \geq 100 000 M Ω $>= 10 000 M\Omega$ Y5U.Y5V:

TOLERANCE ON CAPACITANCE

± 5 %; ± 10 %; ± 20 %; + 80/- 20 % Other tolerances available on request

DISSIPATION FACTOR

UJ.SL: 6X10-4 X5F: 1% X7R: 1.5% N4700: 0.2% Y5T: 1% Y5U,Y5V: 2%





Ceramic Disc Style

Ceramic Disc Capacitors Class 1 and 2, 1 kV_{DC} to 50 kV_{DC} , General Purpose

N0.	Part Number	Material		Max	(mm)	
140.	raitivambei	Material	D	Т	Р	d
1	HVC-2KV-N08-F7.5-10PK	NP0	8	4	7.5	0.6
2	HVC-2KV-N08-F7.5-15PK	NP0	8	4	7.5	0.6
3	HVC-2KV-SL08-F7.5-22PK	SL	8	4	7.5	0.6
4	HVC81-2KV-SL08-F7.5-27PK	SL	8	4	7.5	0.6
5	HVC-2KV-SL08-F7.5-33PK	SL	8	4	7.5	0.6
6	HVC-2KV-SL08-F7.5-47PK	SL	8	4	7.5	0.6
7	HVC-2KV-SL08-F7.5-56PK	SL	8	4	7.5	0.6
8	HVC-2KV-SL08-F5-68PK	SL	8	4	7.5	0.6
9	HVC-2KV-DP08-F5-101K	Y5P	8	4	7.5	0.6
10	HVC-2KV-DP08-F7.5-151K	Y5P	8	4	7.5	0.6
11	HVC-2KV-DP08-F7.5-221K	Y5P	8	4	7.5	0.6
12	HVC-2KV-DP08-F7.5-331K	Y5P	8	4	7.5	0.6
13	HVC-2KV-DP08-F7.5-471K	Y5P	8	4	7.5	0.6
14	HVC-2KV-DP08-F7.5-561K	Y5P	8	4	7.5	0.6
15	HVC-2KV-DP08-F7.5-681K	Y5P	8	4	7.5	0.6
16	HVC-2KV-DP08-F7.5-102K	Y5P	8	4	7.5	0.6
17	HVC-2KV-DP08-F10-222K	Y5P	8	4	10	0.6
18	HVC-2KV-E07-F7.5-222M	Y5U	7	4	7.5	0.6
19	HVC-2KV-DP14-F10-332K	Y5P	14	4	10	0.6
20	HVC-2KV-E11-F10-332M	Y5U	11	4	10	0.6
21	HVC-2KV-DP14-F10-472K	Y5P	14	4	10	0.6
22	HVC-2KV-E11-F10-472M	Y5U	11	4	10	0.6
23	HVC-2KV-DP17-F10-103K	Y5P	17	4	10	0.8
24	HVC-2KV-E14-F10-103M	Y5U	14	4	10	0.6
25	HVC-2KV-F09-F10-103Z	Y5V	9	4	10	0.6
26	HVC-3KV-SL08-F7.5-10PK	SL	8	4.5	7.5	0.6
27	HVC-3KV-SL08-F7.5-15PK	SL	8	4.5	7.5	0.6
28	HVC-3KV-SL08-F7.5-22PK	SL	8	4.5	7.5	0.6
29	HVC-3KV-SL08-F7.5-27PK	SL	8	4.5	7.5	0.6
30	HVC-3KV-SL08-F7.5-33PK	SL	8	4.5	7.5	0.6
31	HVC-3KV-SL08-F7.5-47PK	SL	8	4.5	7.5	0.6
32	HVC-3KV-SL08-F7.5-56PK	SL	8	4.5	7.5	0.6
33	HVC-3KV-SL08-F7.5-68PK	SL	8	4.5	7.5	0.6
34	HVC-3KV-SL08-F7.5-101K	SL	8	4.5	7.5	0.6
35	HVC-3KV-DP06-F5-101K	Y5P	6	4	5	0.6
36	HVC-3KV-DP08-F10-151K	Y5P	8	4.5	10	0.6
37	HVC-3KV-DP08-F10-221K	Y5P	8	4.5	10	0.6
38	HVC-3KV-DP08-F10-331K	Y5P	8	4.5	10	0.6
39	HVC-3KV-DP08-F10-471K	Y5P	8	4.5	10	0.6
40	HVC-3KV-DP08-F10-561K	Y5P	8	4.5	10	0.6
41	HVC-3KV-DP08-F10-681K	Y5P	8	4.5	10	0.6
42	HVC-3KV-DP08-F10-102K	Y5P	8	4.5	10	0.6
43	HVC-3KV-DP10-F10-222K	Y5P	10	4.5	10	0.6
44	HVC-3KV-E08-F10-222M	Y5U	8	4.5	10	0.6
45	HVC-3KV-DP14-F10-332K	Y5P	10	14	4.5	0.6
46	HVC-3KV-E08-F5-332M	Y5U	8	4.5	5	0.6

NO	Dord Novelean		Max (mm)				
N0.	Part Number	Material	D	Т	Р	d	
47	HVC-3KV-DP14-F10-472K	Y5P	14	4.5	10	0.6	
48	HVC-3KV-E10-F10-472M	Y5U	10	4.5	10	0.6	
49	HVC-3KV-E17-F10-103M	Y5U	17	4.5	10	0.65	
50	HVC-3KV-F11-F10-103M	Y5V	11	4.5	10	0.6	
51	HVC-6KV-N09-F10-10PK	NP0	9	6	10	0.6	
52	HVC-6KV-SL08-F10-10PK	SL	8	5	10	0.6	
53	HVC-6KV-SL08-F10-22PK	SL	8	5	10	0.6	
54	HVC-6KV-SL08-F10-33PK	SL	8	5	10	0.6	
55	HVC-6KV-SL08-F10-47PK	SL	9	5	10	0.6	
56	HVC-6KV-SL09-F10-101K	SL	9	6	10	0.6	
57	HVC-6KV-DL06-F5-101K	N4700	6	4	5	0.5	
58	HVC-6KV-DP09-F10-101K	Y5P	9	5	10	0.6	
59	HVC-6KV-DP09-F10-221K	Y5P	9	5	10	0.6	
60	HVC-6KV-DL08-F10-221K	N4700	10	6	10	0.6	
61	HVC-6KV-DP09-F10-331K	Y5P	9	5	10	0.6	
62	HVC-6KV-DL10-F10-331K	N4700	10	5	10	0.6	
63	HVC-6KV-DP09-F10-471K	Y5P	9	5	10	0.6	
64	HVC-6KV-DL11-F10-471K	N4700	11	5	10	0.6	
65	HVC-6KV-DP11-F10-102K	Y5P	11	5	10	0.6	
66	HVC-6KV-D11-F10-102K	Y5T	11	6	10	0.6	
67	HVC-6KV-E08-F10-102M	Y5U	8	5	10	0.6	
68	HVC-6KV-D16-F10-222K	Y5T	16	5	10	0.6	
69	HVC-6KV-E10-F10-222M	Y5U	10	5	10	0.6	
70	HVC-6KV-DL08-F10-221K	N4700	8	6	10	0.6	
71	HVC-6KV-DL14-F10-102K	N4700	14	6	10	0.6	
72	HVC-6KV-DL10-F10-471K	N4700	10	6	10	0.6	
73	HVC-6KV-E15-F10-332M	Y5U	15	5	10	0.6	
74	HVC-6KV-E17-F10-472M	Y5U	17	5	10	0.6	
75	HVC-6KV-E23-F12.5-103M	Y5U	23	6	12.5	0.8	
76	HVC-6KV-F19-F9.5-103M	Y5V	19	6	10	0.65	
77	HVC-10KV-D06-F7.5-101K	Y5T	6	5	7.5	0.65	
78	HVC-10KV-DL07-F10-101K	N4700	7	7	10	0.65	
79	HVC-10KV-D08-F7.5-151K	Y5T	7	6	7.5	0.65	
80	HVC-10KV-DL08-F10-151K	N4700	8	7	10	0.65	
81	HVC-10KV-D08-F7.5-221K	Y5T	8	5.5	7.5	0.65	
82	HVC-10KV-DL08-F10-221K	UJ	9	5	9.5	0.6	
83	HVC-10KV-D08-F7.5-331K	Y5T	8	6	7.5	0.65	
84	HVC-10KV-DL08-F10-331K	N4700	10	6.5	10	0.65	
85	HVC-10KV-D09-F10-471K	Y5T	9	6	10	0.65	
86	HVC-10KV-DL12-F10-471K	N4700	12	7	10	0.8	
87	HVC-10KV-D10-F10-681K	Y5T	10	6	10	0.65	
88	HVC-10KV-DL15-F10-681K	N4700	15	7	10	0.8	
89	HVC-10KV-D14-F10-102K	Y5T	14	7	10	0.8	
90	HVC-10KV-DL16-F10-102K	N4700	16	7	10	0.8	
91	HVC-10KV-D17-F10-222K	Y5T	17	7	10	0.8	
92	HVC-10KV-E14-F10-222M	Y5U	14	7	10	0.8	





Ceramic Disc Style

Ceramic Disc Capacitors Class 1 and 2, 1 kV_{DC} to 50 kV_{DC} , General Purpose

No.	Part Number	Material	Max (mm)				NO	,	Part Number	Material	Max (mm)			
			D	Т	Р	d	""	_	T dittituilissi		D	Т	Р	d
93	HVC-10KV-D21-F12.5-332K	Y5T	21	7	12.5	0.8	14	.1	HVC-20KV-F20-F12.5-682Z	Y5V	20	9	12.5	0.8
94	HVC-10KV-E16-F10-332M	Y5U	16	7	10	0.8	14	2	HVC-20KV-F24-F12.5-103Z	Y5V	40	22	20	1.2
95	HVC-10KV-E20-F12.5-472M	Y5U	20	7	12.5	0.8	14	.3	HVC-25KV-D09-F7.5-221K	Y5T	9	8.5	7.5	0.65
96	HVC-10KV-F17-F12.5-682Z	Y5V	17	8	12.5	0.8	14	4	HVC-25KV-D10-F10-331K	Y5T	10	8.5	10	0.65
97	HVC-10KV-E33-F20-103M	Y5U	33	9	20	0.8	14	5	HVC-25KV-D11-F10-471K	Y5T	11	8.5	10	0.65
98	HVC-10KV-F21-F12.5-103Z	Y5V	21	7	12.5	0.8	14	6	HVC-25KV-D13-F10-681K	Y5T	13	9	10	0.65
99	HVC-10KV-D21-F12.5-332M	Y5T	24	8.5	12.5	0.8	14	.7	HVC-25KV-D16-F12.5-102K	Y5T	16	9	12.5	0.8
100	HVC-15KV-D07-F7.5-101K	Y5T	7	7	7.5	0.65	14	.8	HVC-25KV-D22-F12.5-222K	Y5T	22	10	12.5	0.8
101	HVC-15KV-DL07-F10-101K	N4700	7	7	10	0.65	14	9	HVC-25KV-F17-F12.5-472Z	Y5V	17	9	12.5	0.8
102	HVC-15KV-DL09-F10-151K	N4700	9	7	10	0.65	15	0	HVC-25KV-F25-F16-103Z	Y5V	25	10.5	16	0.8
103	HVC-15KV-D08-F7.5-221K	Y5T	8	7	7.5	0.65	15	1	HVC-30KV-D08-F10-101K	Y5T	8	9	10	0.65
104	HVC-15KV-DL10-F10-221K	N4700	10	7	10	0.65	15	\rightarrow	HVC-30KV-DL10-F10-101K	N4700	10	10	10	0.8
105	HVC-15KV-D08-F7.5-331K	Y5T	8	7	7.5	0.65	15	-	HVC-30KV-D10-F15-151K	Y5T	10	11	15	0.8
106	HVC-15KV-DL12-F10-331K	N4700	12	8	10	0.65	15	-	HVC-30KV-DL10-F10-151K	N4700	10	9	10	0.8
107	HVC-15KV-D09-F10-471K	Y5T	9	7	10	0.65	15	\rightarrow	HVC-30KV-D11-F15-221K	Y5T	11	11	15	0.8
108	HVC-15KV-DL14-F10-471K	N4700	14	8	10	0.8	15	\rightarrow	HVC-30KV-DL13-F12.5-221K	N4700	13	9	12.5	0.8
109	HVC-15KV-D11-F10-681K	Y5T	11	7	10	0.65	15	\rightarrow	HVC-30KV-D11-F10-331K	Y5T	11	10	10	0.8
110	HVC-15KV-DL16-F10-681K	N4700	16	8	12.5	0.03	15	\rightarrow	HVC-30KV-DL15-F10-331K	N4700	15	11	10	0.8
111	HVC-15KV-D13-F10-102K	Y5T	13	7	10	0.8	15	\rightarrow	HVC-30KV-D12-F12.5-471K	Y5T	12	10	12.5	0.8
112	HVC-15KV-D13-F12.5-102K	N4700	18	8	12.5	0.8	16	\rightarrow	HVC-30KV-DL20-F12.5-471K	N4700	20	11	12.5	0.8
	HVC-15KV-DL18-F12.5-102K	Y5T		-		0.8	-	\rightarrow	HVC-30KV-DL20-F12.5-501K		20	12		_
113 114		+	19	8	12.5	_	16	\rightarrow	HVC-30KV-DL19-F17.5-501K	N4700	19	11	16 17.5	0.8
115	HVC-15KV-DL26-F12.5-202K	N4700	26	8	12.5	0.8	16 16	\rightarrow	HVC-30KV-DL19-F17.5-501K	N4700	_	-	_	
116	HVC-15KV-DL26-F12.5-222K	N4700	26	10	12.5	0.8	16	_		Y5T	14	10	12.5	0.8
117	HVC-15KV-E21-F12.5-472M	Y5U	21	7	12.5	0.8	16	_	HVC-30KV-D17-F12.5-102K	Y5T	17	10.5	12.5	0.8
118	HVC-15KV-F18-F12.5-682Z	Y5V	18	8	12.5	0.8	-	\rightarrow	HVC-30KV-DL28-F17.5-102K	N4700	28	15	17.5	1.0
	HVC-15KV-F23-F12.5-103Z	Y5V	23	8	12.5	0.8	16	\neg	HVC-30KV-D24-F14-222K	Y5T	24	10.5	14	1.0
119	HVC-20KV-D07-F7.5-101K	Y5T	7	8	7.5	0.65	16	\rightarrow	HVC-30KV-D26-F18-222K	Y5T	26	13	18	1.0
120	HVC-20KV-DL08-F10-101K	N4700	8	8	10	0.65	16	\rightarrow	HVC-30KV-E23-F13-332M HVC-30KV-F23-F15-472Z	Y5U	23	13	13	0.8
121	HVC-20KV-DL11-F10-151K	N4700	11	8	10	0.65	16	\rightarrow	HVC-30KV-F23-F15-472Z HVC-30KV-F28-F16-103Z	Y5V	23	13	15 16	0.8
122	HVC-20KV-D07-F7.5-221K	Y5T	7	7	7.5	0.65	17	\rightarrow	HVC-30KV-F28-F16-103Z	Y5V	28	12	_	0.8
123	HVC-20KV-DL12-F10-221K	N4700	12	8	10	0.65	17	\rightarrow		Y5V	31	15	16	0.8
124	HVC-20KV-D09-F7.5-331K	Y5T	9	7	7.5	0.65	17	\rightarrow	HVC-40KV-D08-F10-101K	Y5T	8	12	10	0.8
125	HVC-20KV-DL13-F10-331K	N4700	13	9	10	0.65	17	-	HVC-40KV-DL11-F10-101K	N4700	11	12	10	0.8
126	HVC-20KV-D11-F10-471K	Y5T	11	8	10	0.65	17	-	HVC-40KV-DL16-F12.5-221K	N4700	16	13	12.5	0.8
127	HVC-20KV-DL16-F10-471K	N4700	16	9	10	0.8	17	\rightarrow	HVC-40KV-D10-F10-251K	Y5T	10	12	12.5	0.8
128	HVC-20KV-D12-F10-501K	Y5T	12	8	10	0.65	17	\rightarrow	HVC-40KV-D15-F15-471K	Y5T	15	13.5	15	0.8
129	HVC-20KV-D13-F10-681K	Y5T	13	8.5	10	0.65	17	7	HVC-40KV-DL25-F16-501K	N4700	25	17	16	1.0
130	HVC-20KV-D15-F10-102K	Y5T	15	8.5	10	0.8	17	'8	HVC-40KV-D19-F14-102K	Y5T	19	13	14	0.8
131	HVC-20KV-D17-F12.5-102K	Y5T	17	9	12.5	0.8	17	'9	HVC-40KV-DL32-F20-102K K	N4700	32	16	20	1.2
132	HVC-20KV-D20-F12.5-102K	Y5T	20	8	12.5	0.8	18	0	HVC-50KV-SL15-F12.5-22PK	SL	15	17	12.5	0.8
133	HVC-20KV-E12-F10-102K	Y5U	12	8	10	0.65	18	1	HVC-50KV-SL16-F12.5-50P	SL	16	17	12.5	0.8
134	HVC-20KV-DL21-F12.5-102K	N4700	21	10	12.5	0.8	18	2	HVC-50KV-DL12-F10-101K	N4700	12	13	12.5	0.8
135	HVC-20KV-DL28-F16-202K	N4700	28	10	16	8.0	18	3	HVC-50KV-D11-F16-251K	Y5T	11	14	16	0.8
136	HVC-20KV-DL28-F16-222K	N4700	28	10	16	0.8	18	34	HVC-50KV-D16-F16-471K	Y5T	16	16	16	0.8
137	HVC-20KV-D18-F10-152K	Y5T	18	8.5	10	0.8	18	5	HVC-50KV-DL27-F16-501K	N4700	27	19	16	1.2
138	HVC-20KV-D21-F12.5-222K	Y5T	21	8.5	12.5	0.8	18	6	HVC-50KV-D22-F16-102K	Y5T	22	18	16	0.8
139	HVC-20KV-E21-F12.5-332M	Y5U	21	8.5	12.5	0.8	18	7	HVC-50KV-DL34-F18-102K	N4700	34	19	18	1.2
140	HVC-20KV-E23-F12.5-472M	Y5U	23	8.5	12.5	0.8	18	8	HVC-50KV-E26-F20-222M	Y5U	26	19	20	1.2