


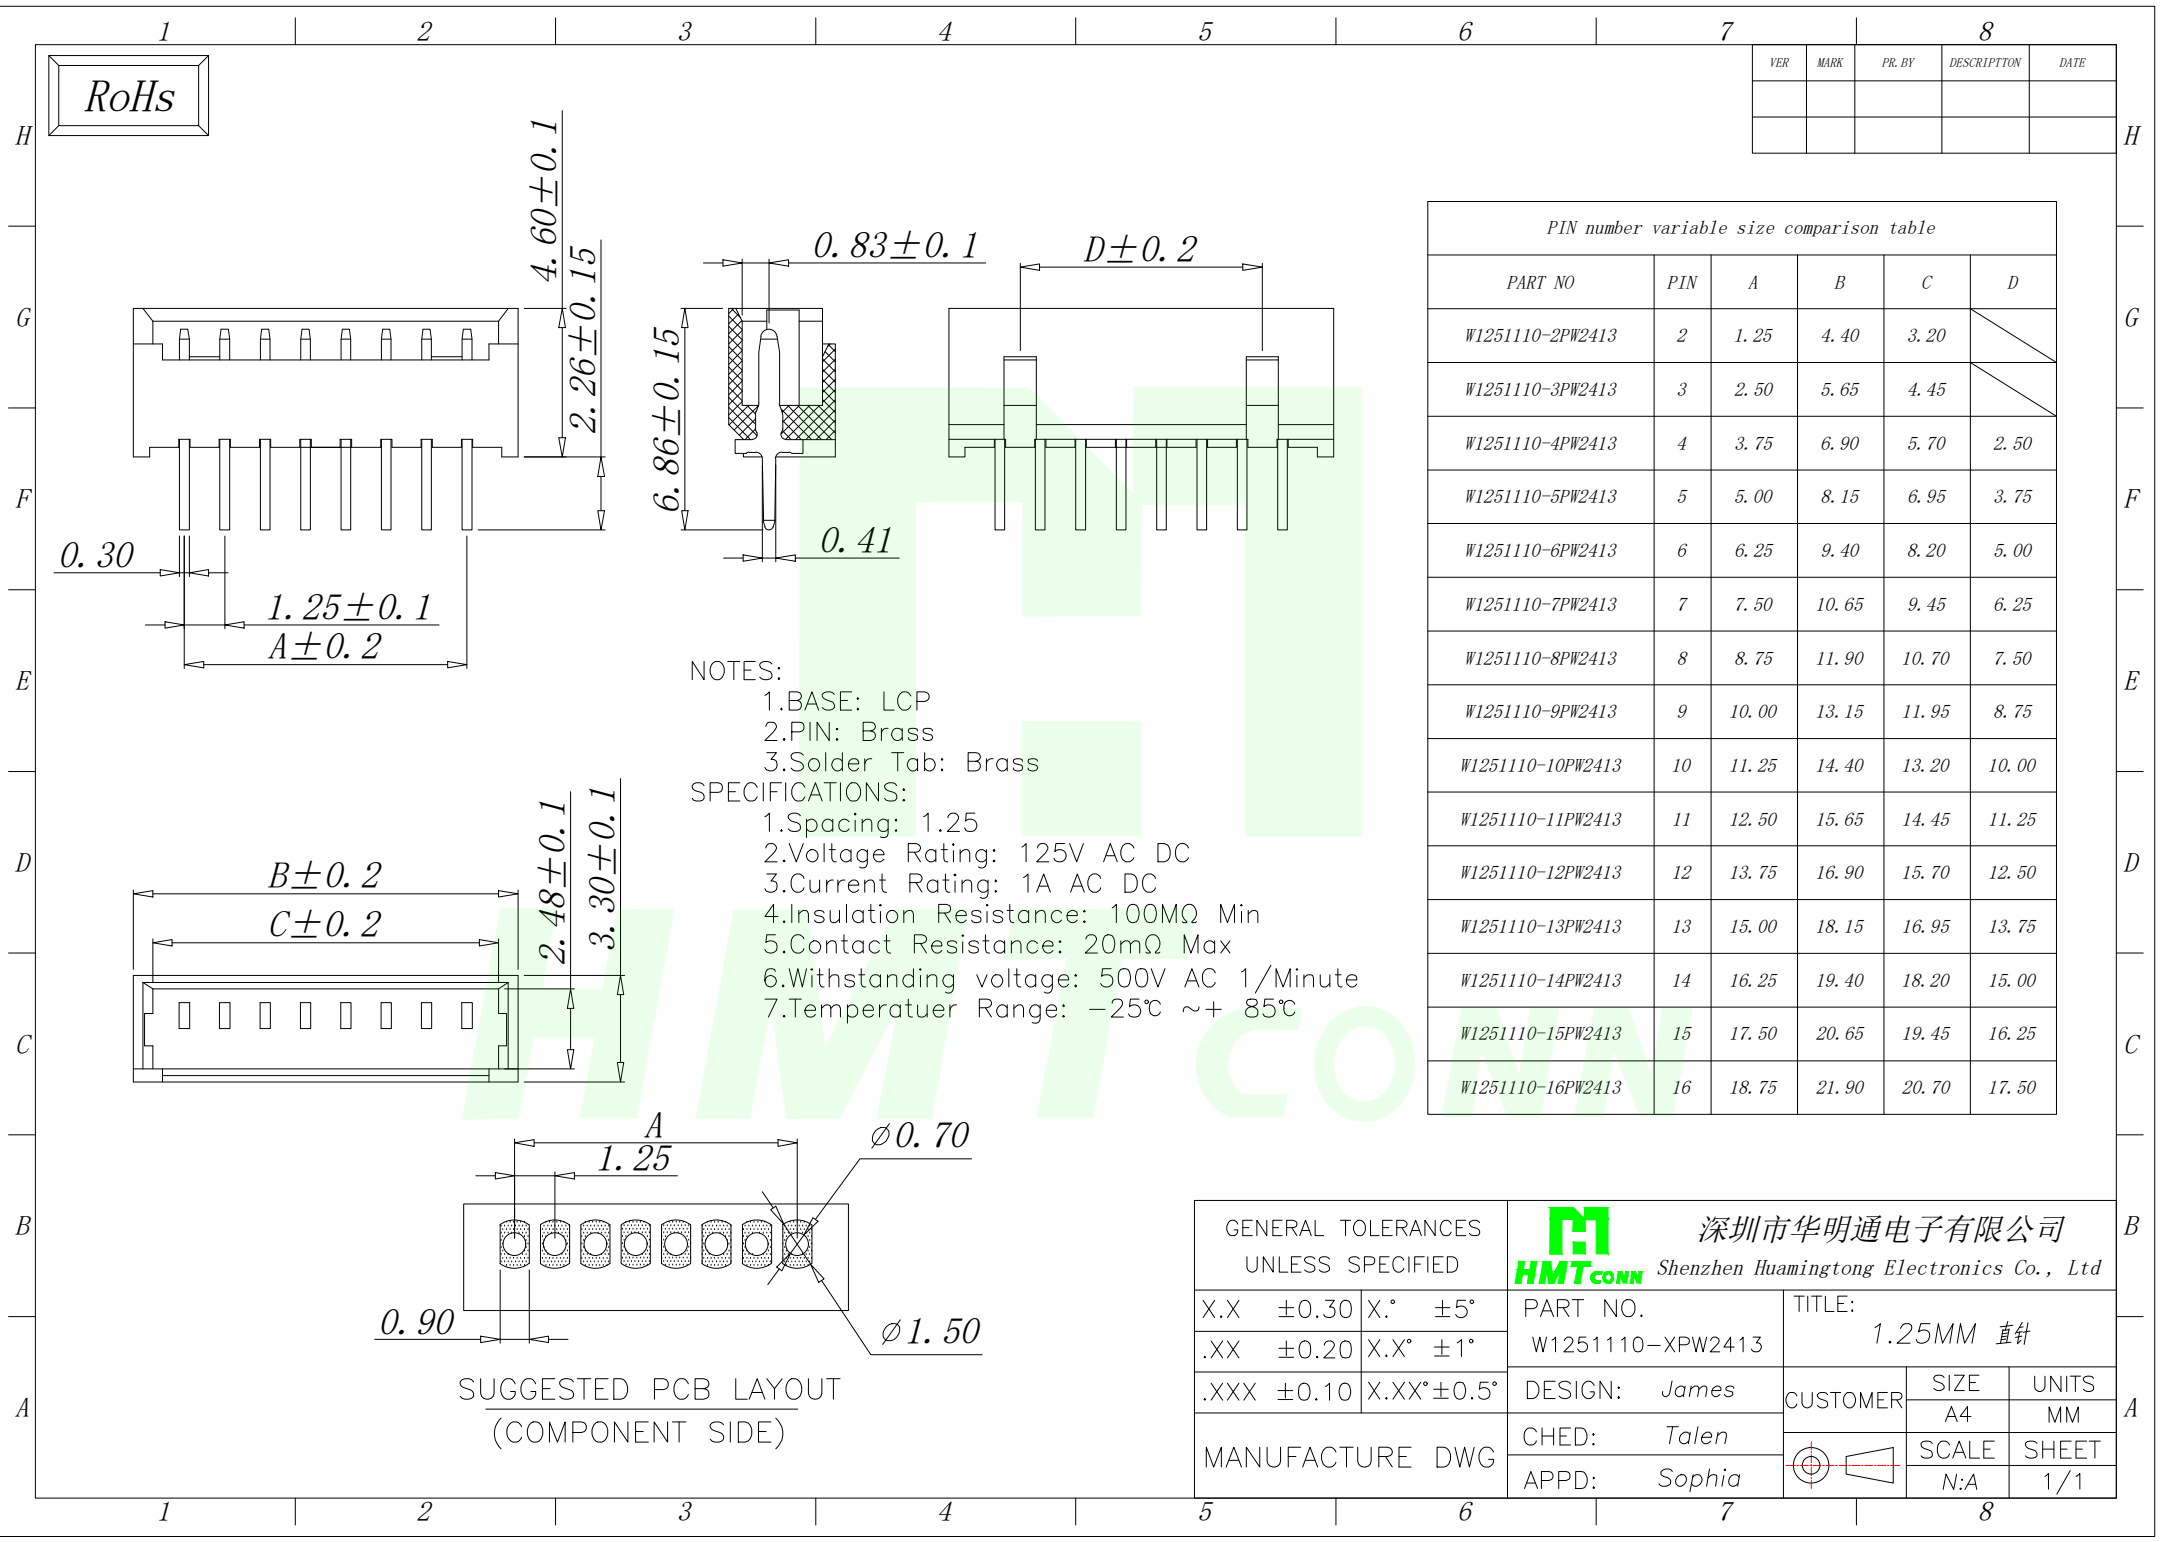

RoHs

VER	MARK	PR. BY	DESCRIPTION	DATE

PIN number variable size comparison table					
PART NO	PIN	A	B	C	D
W1251110-2PW2413	2	1.25	4.40	3.20	
W1251110-3PW2413	3	2.50	5.65	4.45	
W1251110-4PW2413	4	3.75	6.90	5.70	2.50
W1251110-5PW2413	5	5.00	8.15	6.95	3.75
W1251110-6PW2413	6	6.25	9.40	8.20	5.00
W1251110-7PW2413	7	7.50	10.65	9.45	6.25
W1251110-8PW2413	8	8.75	11.90	10.70	7.50
W1251110-9PW2413	9	10.00	13.15	11.95	8.75
W1251110-10PW2413	10	11.25	14.40	13.20	10.00
W1251110-11PW2413	11	12.50	15.65	14.45	11.25
W1251110-12PW2413	12	13.75	16.90	15.70	12.50
W1251110-13PW2413	13	15.00	18.15	16.95	13.75
W1251110-14PW2413	14	16.25	19.40	18.20	15.00
W1251110-15PW2413	15	17.50	20.65	19.45	16.25
W1251110-16PW2413	16	18.75	21.90	20.70	17.50

NOTES:

- 1.BASE: LCP
- 2.PIN: Brass
- 3.Solder Tab: Brass

SPECIFICATIONS:

- 1.Spacing: 1.25
- 2.Voltage Rating: 125V AC DC
- 3.Current Rating: 1A AC DC
- 4.Insulation Resistance: 100MΩ Min
- 5.Contact Resistance: 20mΩ Max
- 6.Withstanding voltage: 500V AC 1/Minute
- 7.Temperatuer Range: -25℃ ~+ 85℃

GENERAL TOLERANCES UNLESS SPECIFIED		 深圳市华明通电子有限公司 Shenzhen Huamingtong Electronics Co., Ltd	
X.X ±0.30	X.* ±5°	PART NO. W1251110-XPW2413	TITLE: 1.25MM 直针
.XX ±0.20	X.X* ±1°	DESIGN: James	CUSTOMER
.XXX ±0.10	X.XX* ±0.5°	CHED: Talen	
MANUFACTURE DWG		APPD: Sophia	SCALE N:A
			UNITS MM
			SHEET 1/1