


CASE DIMENSIONS:

A	30.00 [1.181]	+	1.00 [.039]
B	13.00 [.512]	+	1.00 [.039]
C	33.70 [1.327]	+	1.00 [.039]
C1	38.90 [1.531]	+	1.50 [.059]
D	30.00 [1.181]	+	1.00 [.039]



Properties		Value	Unit	Tol.
Material		Ferrite		
Initial Permeability	μ_i	1000		typ.
Curie Temperature	T_C	150	°C	typ.
Plastic Housing Color		BlackGrey		
Plastic Housing Flammability Rating		UL94V-0		
Test Cable		AWG26		
Test Cable Length		100	mm	
Cable Diameter		13	mm	

IMPEDANCE (Z)			
Frequency	25 MHz	100 MHz	300 MHz
Nominal (REF)	150 Ω	260 Ω	410 Ω
Minimum	- Ω	208 Ω	- Ω

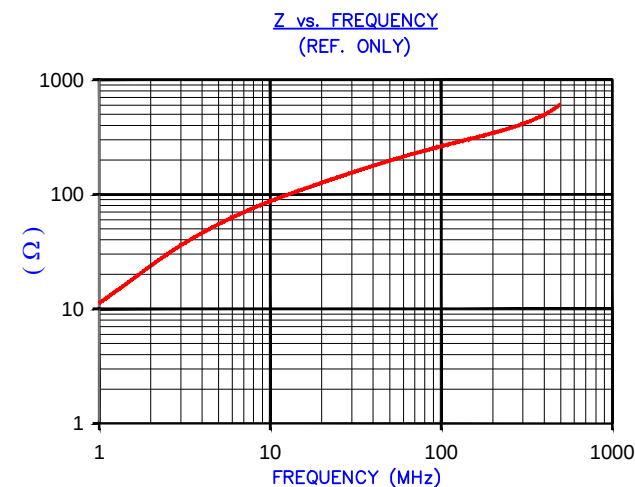

AGILENT E4991A Impedance/Material Analyzer HP 16194A



深圳市韩下电子有限公司

HX 3035-1330-BK-130B

Drawn: 黄彬

Check: 张伟

Approved: 罗小春





深圳市韩下电子有限公司

Shenzhen Hanxia Electronic Co., Ltd

Tel: 0755-33819206 Fax: 0755-27597491

承 认 书

SPECIFICATION FOR APPROVAL

客 户 Customer:

产品名称 Project:

磁环

规格型号 Part No:

HX 3035-1330-BK-130B

贵公司承认印 Approval signatures

料 号/Part No.	签 章/Signatures

日期 Date:

拟制/Drawn	黄彬	
审核/Check	张伟	
批准/Approved	罗小春	