


A-CODE FEMALE INTERFACE

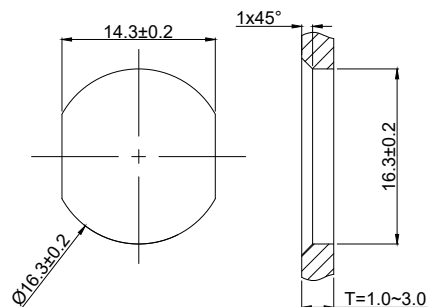

PANEL CUT OUT

NOTE:

1. ELECTRICAL:

1.1.CONTACT RESISTANCE:≤15mΩ

1.2.INSULATION RESISTANCE:≥100MΩ

2. ENVIRONMENTAL:

2.1.OPERATING TEMPERATURE: -25°C TO +85°C

2.2..PROTECTION GRADE:IP67,WHEN TIGHT LOCKED

2.3.POLLUTION DEGREE:3

3.CONTACT MATERIAL: BRASS NI PLATED UNDER GOLD PLATED

4.CONFORM TO IEC 61076-2-101


* UNLESS OTHERWISE SPECIFIED
TOLERANCES ON DECIMAL IS:

X. ± 0.50 X° ± 2°

X.X ± 0.30

X.XX ± 0.20

POLE	03	04	05	06	07	08
CONDUCTOR CROSS-SECTION	20~24AWG 0.5~0.25mm ²	20~24AWG 0.5~0.25mm ²	20~24AWG 0.5~0.25mm ²	24AWG 0.25mm ²	24AWG 0.25mm ²	24AWG 0.25mm ²
RATED VOLTAGE	250V	250V	60V	30V	30V	30V
RATED CURRENT	4A	4A	4A	2A	2A	2A
RATED IMPULSE VOLTAGE	2.5KV	2.5KV	1.5KV	0.8KV	0.8KV	0.8KV

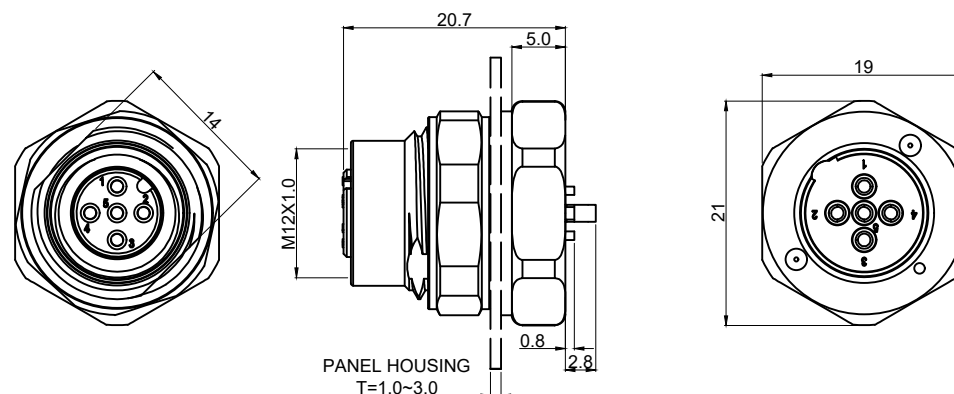

		Material:				
		Finishing:				
Signature	Date	Phase Marking		Weight	Scale	拓宜(上海)工控电器设备有限公司 Topone(Shanghai) Industrial Control Electrical Equipment Co., LTD.
					1:1	
Created by		P/N		61030607		Part Name: C12B-FSA-FM1-5SCUP MX
Checked by		MD/CD				Rev. 01
Approved by		First Release				Page: 1 OF 1
State						