

标 记 MARK	ECN编号/变更内容 ECN NO/DEFINITION	修 改 REVISE	日 期 DATE	核 准 APPROVE

A

B

C

D

E

F

G

A

B



C

D







E

F

G

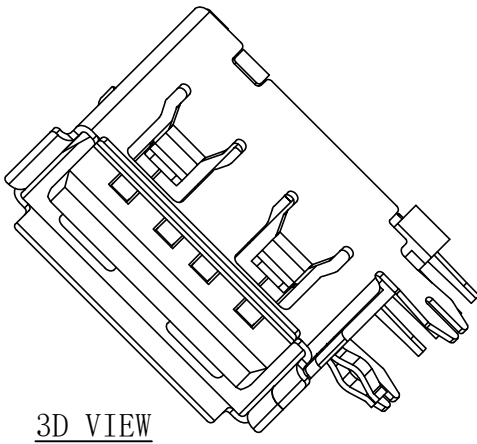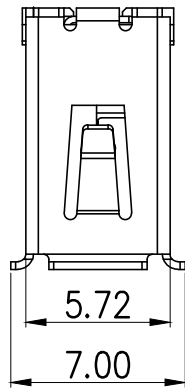

3D VIEW

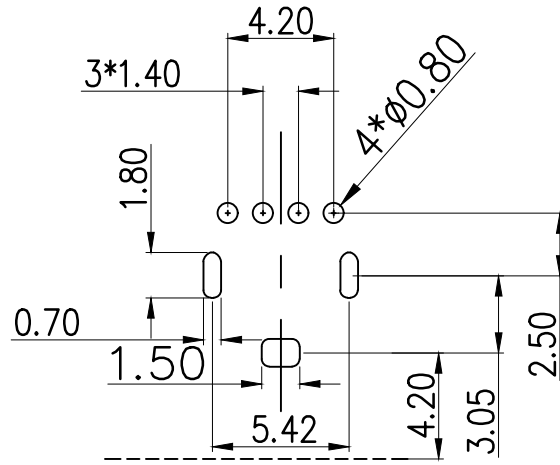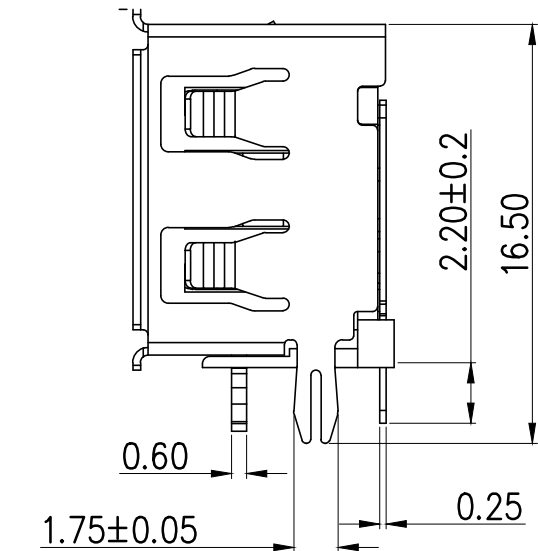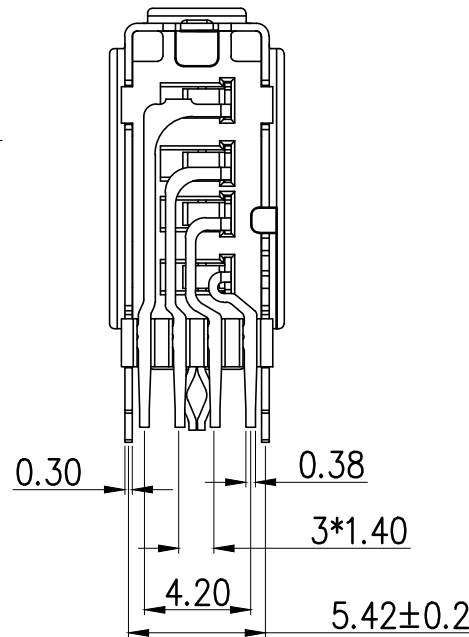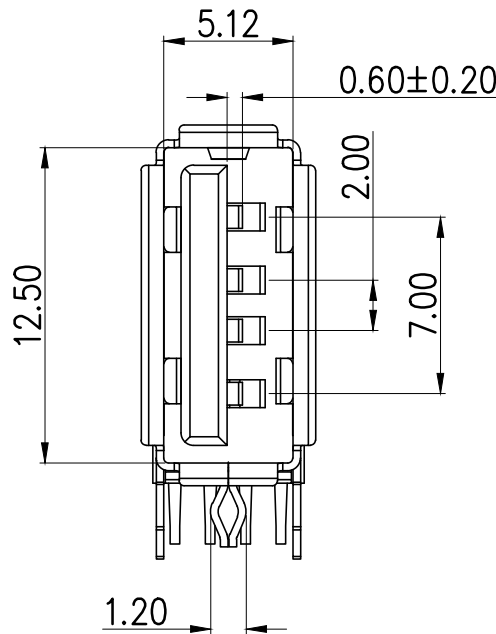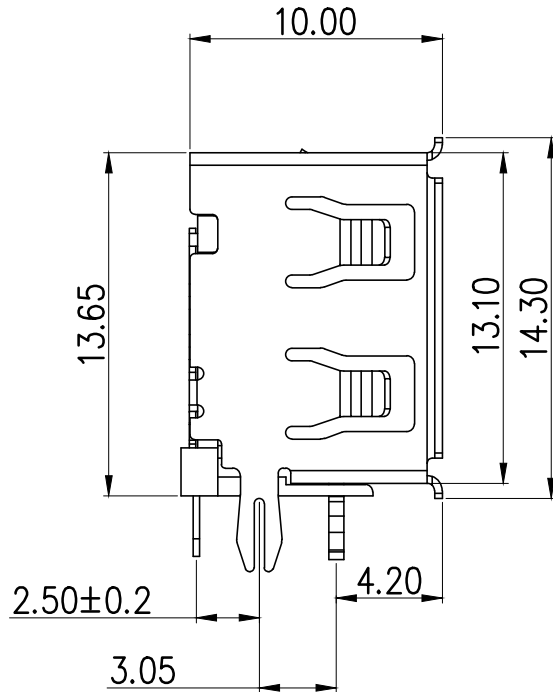

RECOMMENDER P. C. B. LAYOUT TOP VIEW
(COMPONENT SIDE TOLERANCE±0.05)

规格说明:Specifications:

电气特性:Electrical:

1. 额定电流: Current Rating
1.5A/contact terminal
2. 额定电压: Voltage Rating
30V DC
3. 接触阻抗: Contact Resistance
30 milliohms MAX
4. 耐电压: Dielectric Withstanding Voltage:
500 V AC AT Sea Level
5. 绝缘阻抗: Insulation Resistance:
500MEGA ohms MIN

物理特性:Mechanical:

1. 插拔力: Connector Mate and Unmate Force
Mate force: 35 N (MAX)
Unmate force:5-35 N
2. 耐久 (寿命): 1500 Cycles Min
3. 工作温度: -25° C - +70° C
4. 存储温度: -40° C - +85° C
5. 盐雾测试: 24H (不包含外壳铆合折弯处)

3	外壳	铁	镀镍	
2	接触	铜	镀金	
1	基座	PBT	白色	
序 号	品 名	材 质	电镀/颜色	备 注



深圳市虹成电子有限公司

品 名 TITLE	USB座
料 号 PART NO	HC-USB2.0-L100-J

GENERAL TOLERANCES (UNLESS SPECIFIED)	比 列 SCALE	1:1		
X. xxx ±0.10 X. xx ±0.20 X. x ±0.30	单 位 UNIT	MM	制 图 DRAW	AhYe
ANGULAR: X. xx° ±1° X. x° ±3° X. ° ±5°	张 数 PART NO	1 OF 1	审 核 CHECKED	夏操云
	版 本 REV	A	批 准 APPROVE	赵亮亮

