
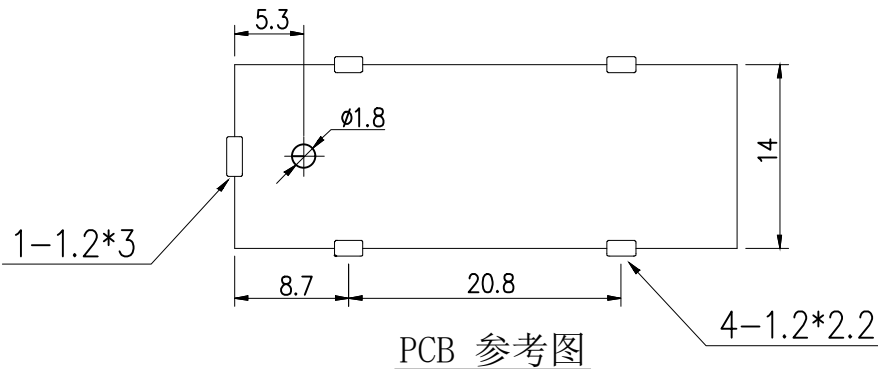
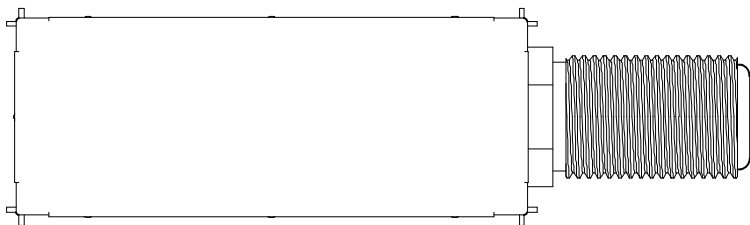
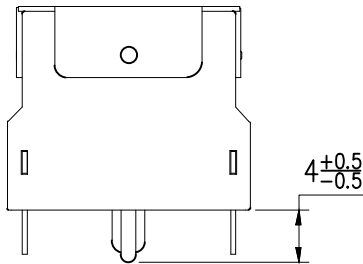
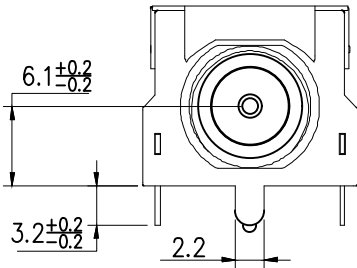
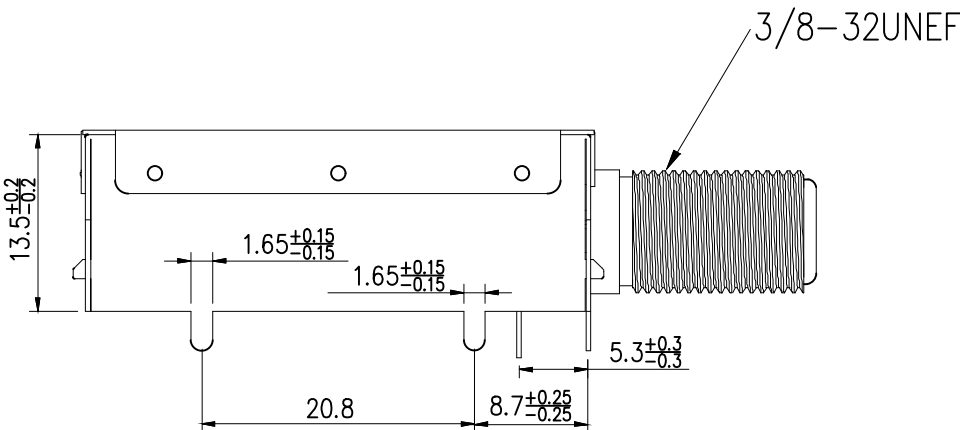
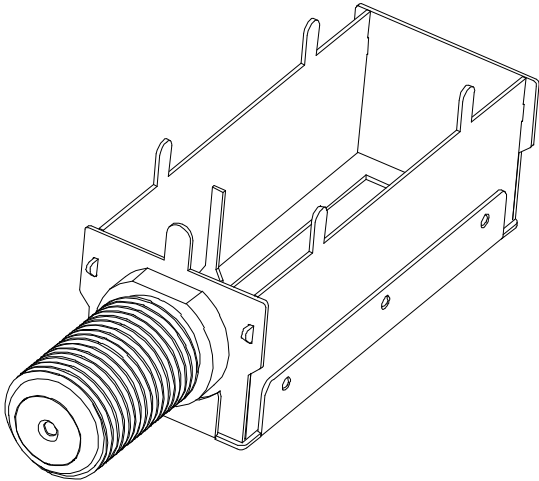


标 记 MARK	ECN编号/变更内容 ECN NO/DEFINITION	修 改 REVISE	日 期 DATE	核 准 APPROVE

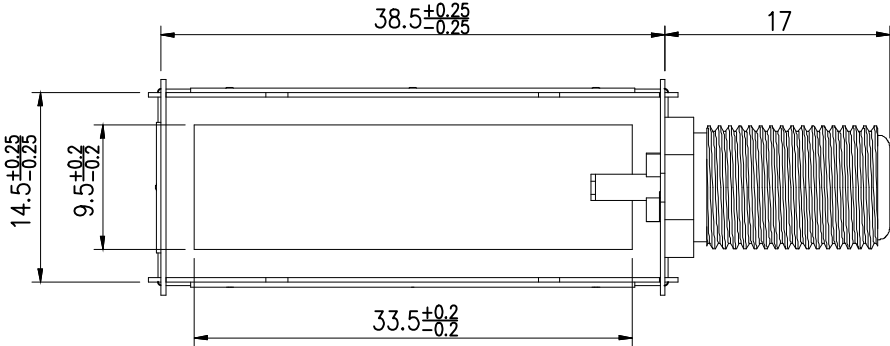

SPECIFICATION (技术要求)

- Operating Temperature(环境温度): -20℃~70℃
- Voltage Rating(额定电压): 24V AC/DC
- Current Rating(额定电流): 0.5A
- Contact Resistance(接触抗阻): 30mΩ
- Insulation Resistance(绝缘抗阻): 500MΩ
- Dielectric Withstanding Voltage(耐电压): 500V AC Min
- Insertion/Withdrawal Force(插拔力):
Insertion Force(插入力): ≤30N
Withdrawal Force(拔出力): ≥1N
- Life Time(mating cycles)寿命: >500 Cycles

3	F头	锌合金	镀镍	
2	支架	马口铁	—	
1	绝缘体	PPS	棕色	
序 号	品 名	材 质	电镀/颜色	备 注



深圳市虹成电子有限公司

品 名 TITLE	屏蔽罩
料 号 PART NO	HC-PBZ-385145F

GENERAL TOLERANCES (UNLESS SPECIFIED)		比 列 SCALE	1:1	制 图 DRAW		审 核 CHECKED		批 准 APPROVE	
0-10: ±0.20	26-50: ±0.40	单 位 UNIT	MM	制 图 DRAW	AhYe	审 核 CHECKED	夏操云	批 准 APPROVE	赵亮亮
11-25: ±0.30	ANGULAR: ±2°	张 数 PART NO	1 OF 1	版 本 REV	A				

