

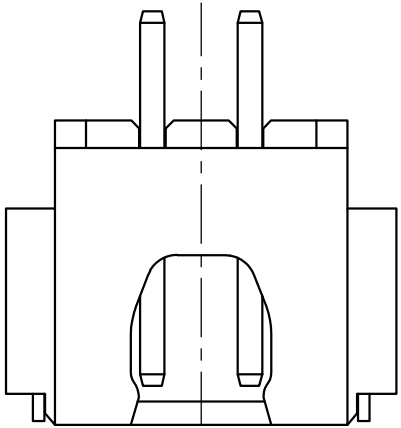
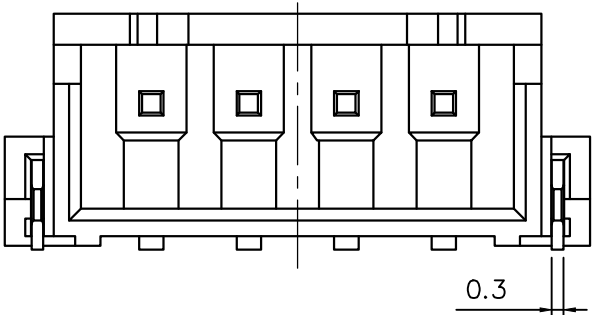
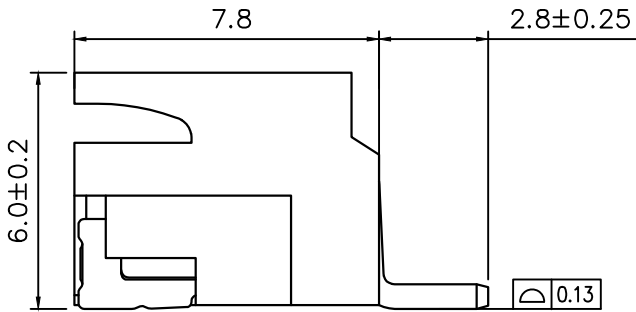
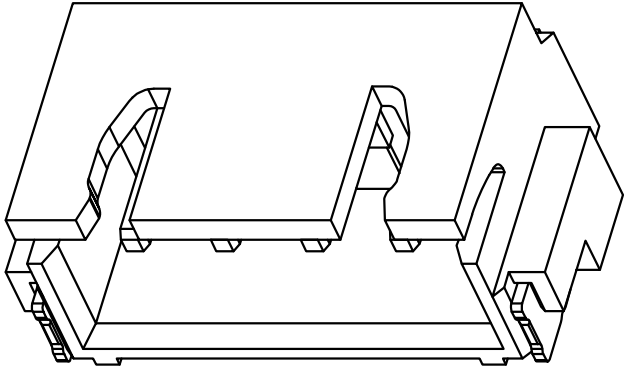


标 记 MARK	ECN编号/变更内容 ECN NO/DEFINITION	修 改 REVISE	日 期 DATE	核 准 APPROVE

CKI	DIM A	DIM B	DIM C
2	2.50	7.50	10.00
3	5.00	10.00	12.50
4	7.50	12.50	15.00
5	10.00	15.00	17.50
6	12.50	17.50	20.00
7	15.00	20.00	22.50
8	17.50	22.50	25.00
9	20.00	25.00	27.50
10	22.50	27.50	30.00
11	25.00	30.00	32.50
12	27.50	32.50	35.00
13	30.00	35.00	37.50
14	32.50	37.50	40.00
15	35.00	40.00	42.50
16	37.50	42.50	45.00

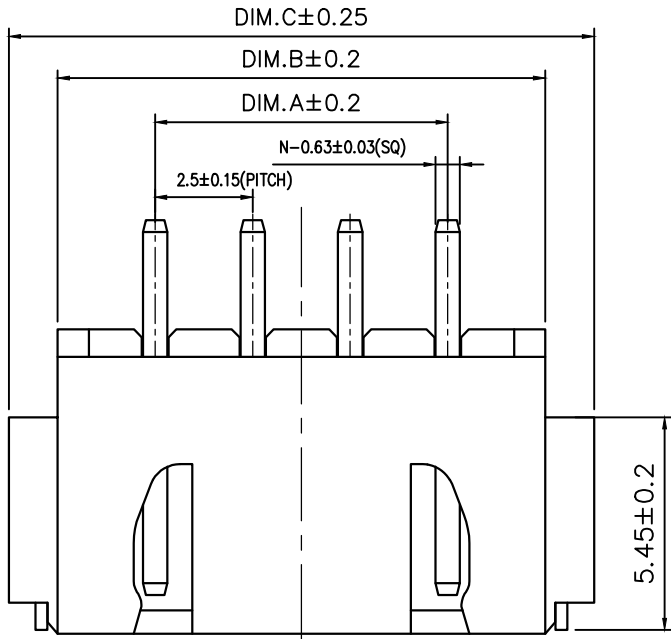

2P 结构样式

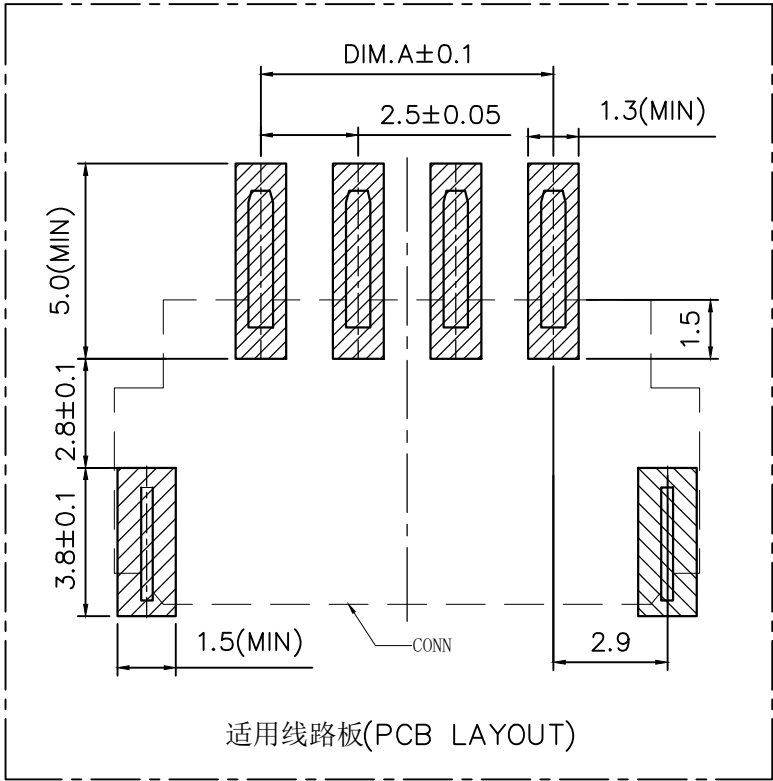

适用线路板(PCB LAYOUT)

- 技术指标:
- 1.工作温度: -25℃~85℃
 - 2.额定电压: 250V, DC/AC(rms)
 - 3.额定电流: 3.0A
 - 4.接触电阻: ≤20mΩ
 - 5.耐 压: 1000V AC/minute
 - 6.绝缘电阻: ≥1000MΩ
 - 7.适用线规: AWG#30~#22

2	插针	铜	镀锡	
1	基座	LCP	本色	
序 号	品 名	材 质	电镀/颜色	备 注



深圳市虹成电子有限公司

品 名 TITLE	针座
料 号 PART NO	HCZZ0021-9

GENERAL TOLERANCES (UNLESS SPECIFIED)	比 列 SCALE	1:1				
X. ±0.50 .XX ±0.10	单 位 UNIT	MM	制 图 DRAW	AhYe		
.X ±0.20 .XXX ±0.05	张 数 PART NO	1 OF 1	审 核 CHECKED	夏操云		
ANGLES ±1°	版 本 REV	A	批 准 APPROVE	赵亮亮		