

HSF

NOTES:

Current Rating: 3.0AMP
Contact Resistance: 20mΩ Max
Withstand Voltage: 500V AC/DC
Insulation Resistance: 1000MΩ Min
Operation Temperature: -40℃ to +105℃

Contact Material: Phosphor Bronze
Contact plating: Au Or Sn over Ni
Insulator Material: PA9T+33%G.F UL94V-0

Ordering Information




2243-1 XX M XX CUN X X

No. of Pins per Row: 02-40Pin



Contact Plating:
G0=Gold Flash
G3=10μ"Gold
G4=15μ"Gold
G5=30μ"Gold
S0=Gold Flash/Tin
S3=10μ"Gold/Tin
S4=15μ"Gold/Tin
S5=30μ"Gold/Tin
SN=Tin
SM=Matte Tin

Packing:
T=Tube
P=Tube+CAP
R=Tape&Reel+CAP

Series No.
1=Type 1
2=Type 2

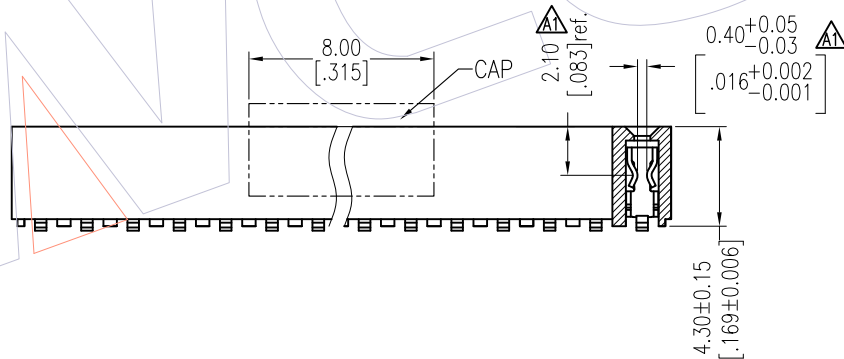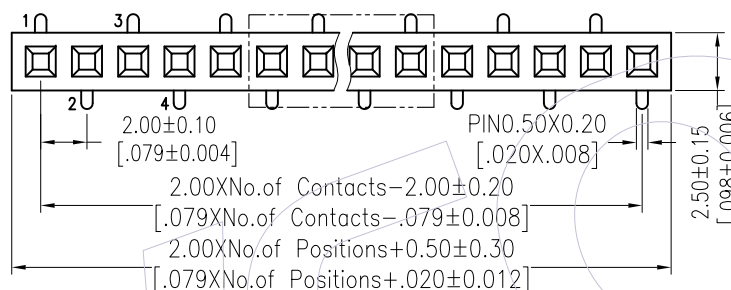

Recommended P.C.B Layout(Top Side) (PCB BOARD TOLERANCE±0.05)

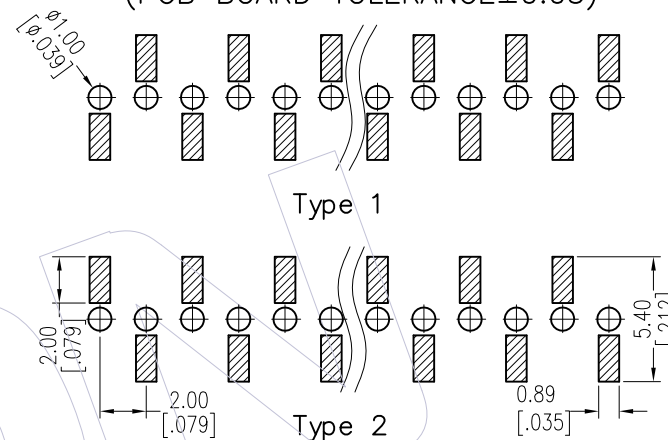

Item	Pitch	Mating
Standard	2.00	1215/1220
Alternate		

TITLE	PART NO.
TYPE 1	2243-1XXMXXCUNX1
TYPE 2	2243-1XXMXXCUNX2

				OPERATION		DRAW Surong Xu	DATE 2018/05/04	SCALE UNIT mm	FIT mm	PART NO. SEE TABLE
				x.x	±0.40					
A1	2018/05/04	MODIFY P/N & CAP ; ADD DIM.		x.xx	±0.25	CHECK	DATE	SIZE	A4	FH2.00 SINGLE ROW 180°SMT H=4.3
A0	2012/07/13	NEW		x.xxx	±0.15	APPROVE	DATE	SHEET	1/1	
REV	DATE	MODIFICATION DESCRIPTION		Angle	± 3°			PROJ.		Customer NO.
		CHANGE	DIM	TOL						

WCON

Http: www.wcon.com

WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: salesks@wcon.com