


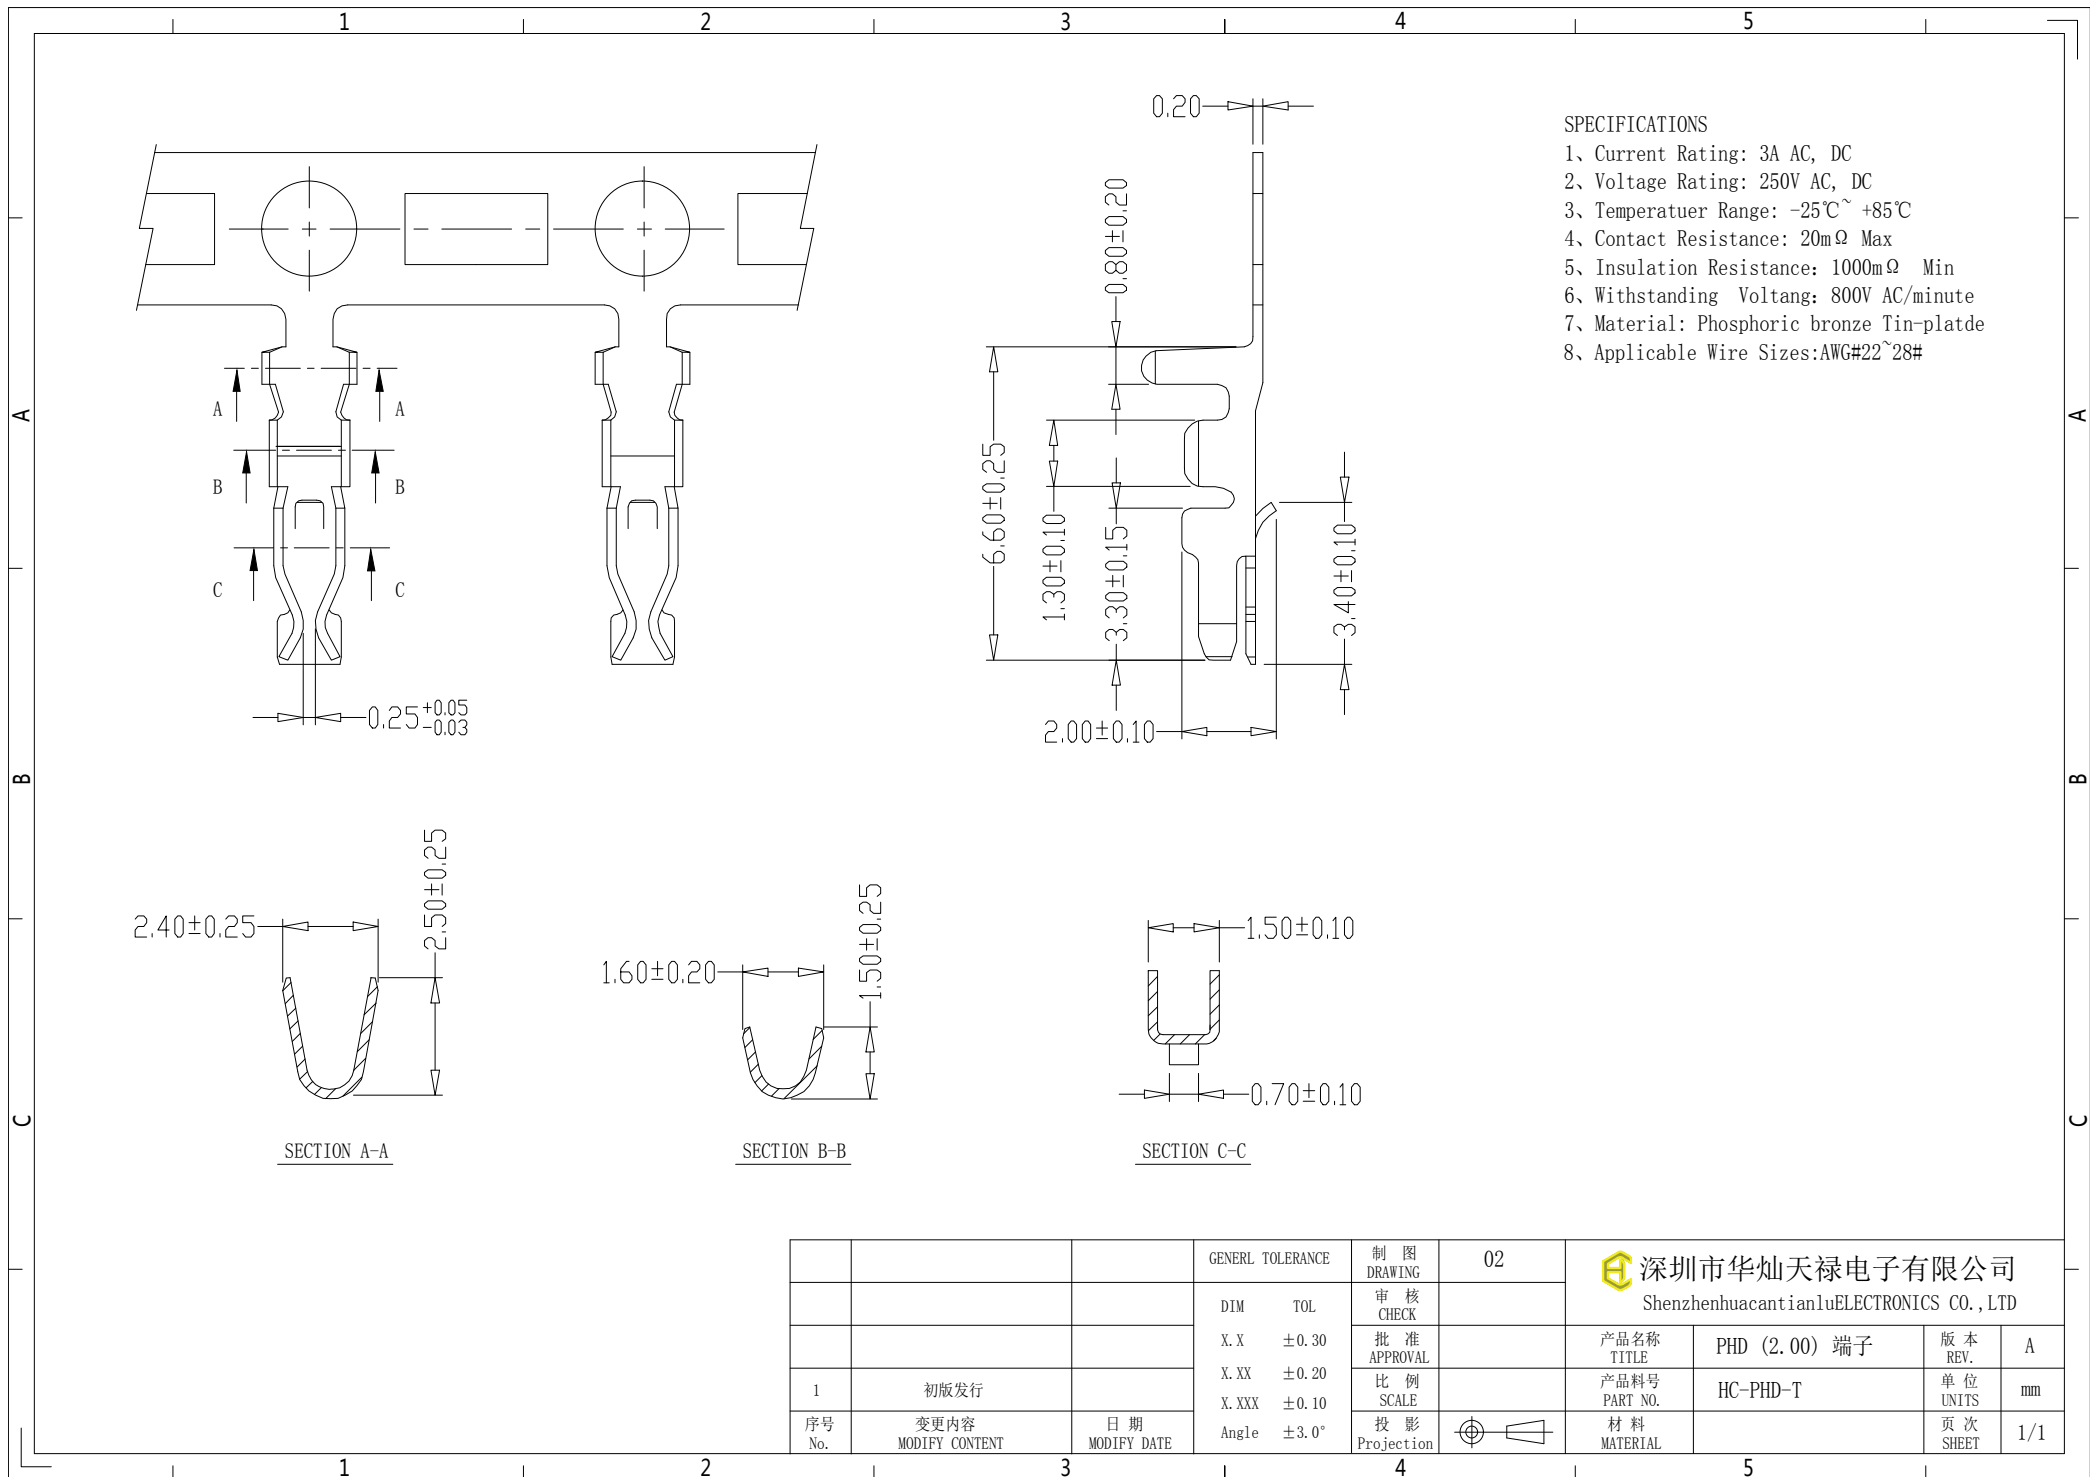

- SPECIFICATIONS
1. Current Rating: 3A AC, DC
 2. Voltage Rating: 250V AC, DC
 3. Temperatuer Range: -25℃~ +85℃
 4. Contact Resistance: 20mΩ Max
 5. Insulation Resistance: 1000mΩ Min
 6. Withstanding Voltang: 800V AC/minute
 7. Material: Phosphoric bronze Tin-platde
 8. Applicable Wire Sizes:AWG#22~28#

			GENEERL TOLERANCE	制 图 DRAWING	02	深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO., LTD			
			DIM TOL	审 核 CHECK		产品名称 TITLE	PHD (2.00) 端子	版 本 REV.	A
			X. X ±0.30	批 准 APPROVAL		产品料号 PART NO.	HC-PHD-T	单 位 UNITS	mm
1	初版发行		X. XX ±0.20	比 例 SCALE		材 料 MATERIAL		页 次 SHEET	1/1
序号 No.	变更内容 MODIFY CONTENT	日 期 MODIFY DATE	Angle ±3.0°	投 影 Projection					