

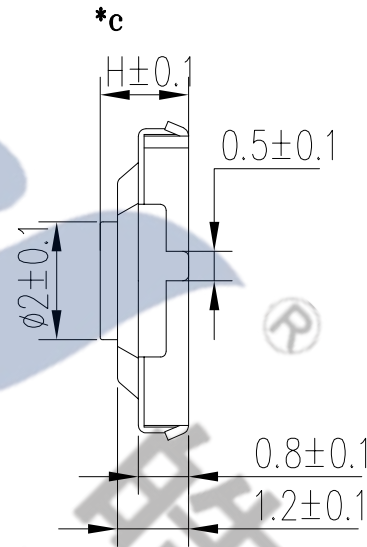



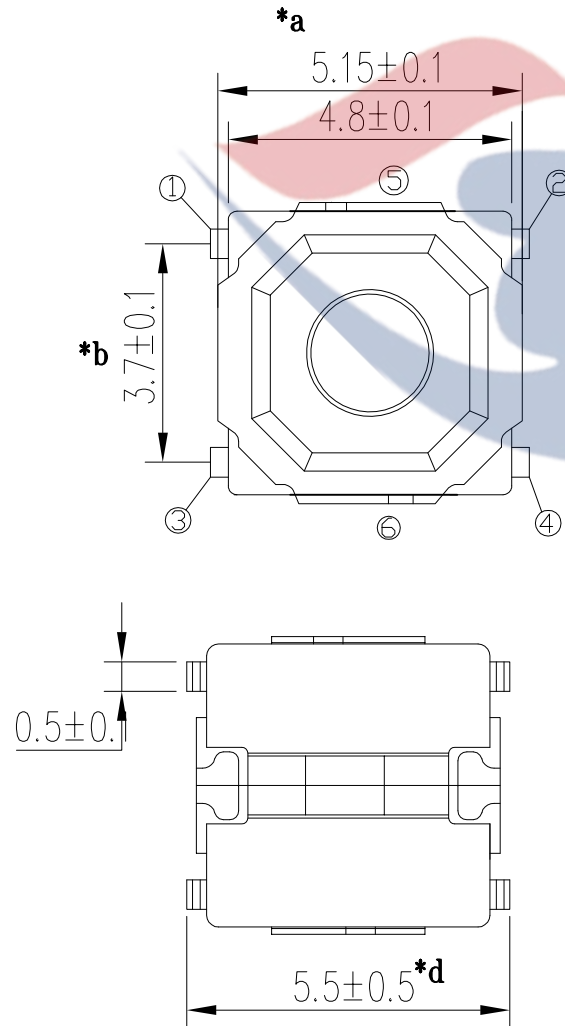


SPECIFICATION

- 1.Rating : DC12V 50mA.
- 2.Contact resistance: ≤100mΩ.
- 3.Insulation resistance: ≥100MΩ (DC100V).
- 4.Withstanding voltage: 250VAC .
- 5.Operating Force: 250±80gf (依客户需求而定) .
- 6.Travel:0.15±0.1mm.
- 7.life test: 10,0000 cycles.



SCHEMATIC

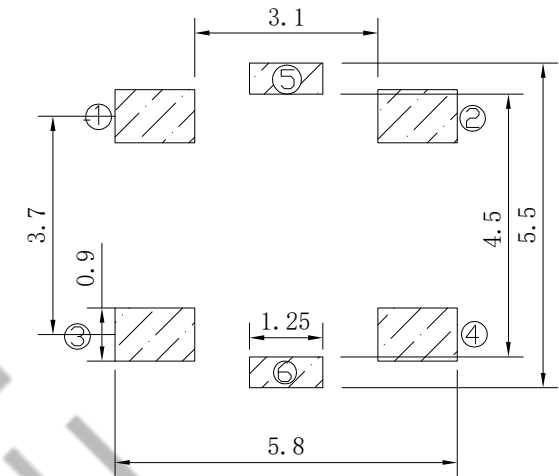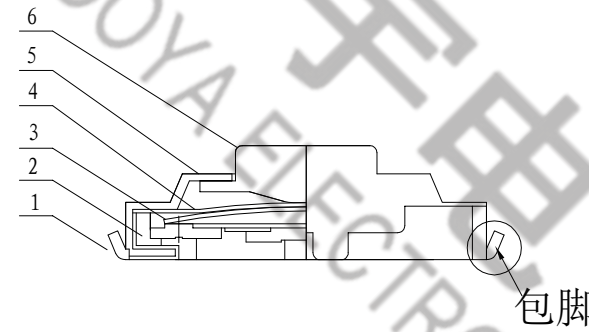

P . C . B LAYOUT

H=1.5mm

					TOLERANCE UNLESS SPECIFIED						
6	STEM	BRASS	1	YELLOW	<1.5: ±0.1mm	ANGULAR	A1	2024.6.25	△接触脚更改为磷铜	YKH	
5	COVER	SUS	1	Ag-PLATED	>1.5~5.0: ±0.25mm	±1°	NO	DATE	REVISIONS	BY	APPD
4	Waterproof membrane	PI	1	YELLOW	>5.0: ±0.3mm						
3	CONTACT	SUS	1	Ag-Plated	TITLE: TACT SWITCH			UNIT : MM	ROHS	DWN	
2	CASE	PA9T	1	BLACK	MODEL: TS-1187U-015E			SCALE: 1:1	COMPLIANT	CHK'D	
1	TERMINAL	PHOSPHOR BRONZE	4	Ag-Plated	DONGGUANG HAOYU ELECTRONICS CO., LTD					APPD	
NO.	PART	NAME	MATERIAL	QTY	FINISHING	皓宇 HAOYU 东莞市弘皓电子有限公司			PRO.AGL:	≡ ⊕	REV :A1