



RoHS

VER	MARK	PR. BY	DESCRIPTION	DATE



CIRCUIT DIAGRAM

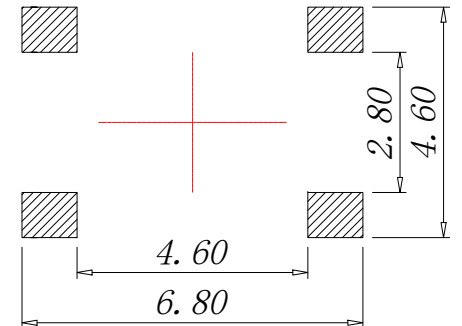

PCB.WELDING DRAWING

E	按钮	黄铜	1	酸洗
D	盖板	不锈钢	1	清洗
C	防尘膜	聚酰亚胺	1	橙黄色
B	弹片	不锈钢	1	镀银
A	卡件	黄铜	1	镀银
ITEM	DESCRIPTION	MATERIAL	QTY	FINSH/COLOR

The Main Thchnology Performance

Rate voltage,current	50mA DC12V
Contact resistance	≤100mΩ
Operating force	±50gf
Travel	0.20±0.10mm
Insulated resistance	≥100MΩ
Dielectric strength	≥250VAC/1min

TS60110-411-AA

按力码 按力可定制

100=10
150=15
280=28

高度码

H1. 5=015
H1. 6=016
H1. 7=017
H1. 8=018
H1. 9=019
H2. 0=020
H2. 5=025
...
H5. 5=055

GENERAL TOLERANCES UNLESS SPECIFIED		HMTconn 深圳市华明通电子有限公司 Shenzhen Huamingtong Electronics Co., Ltd		
X.X ±0.35	X.° ±5°	PART NO. TS60110-411-AA	TITLE: 4x4 SMD TACT SWITCH	
.XX ±0.25	X.X° ±3°		CUSTOMER	SIZE A4
.XXX ±0.15	X.XX° ±1°	DESIGN: James		UNITS MM
MANUFACTURE DWG		CHED: Talen	SCALE N:A	SHEET 1/1
		APPD: Sophia		