

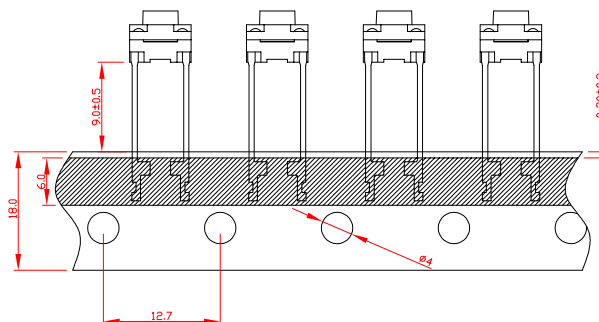


CIRCUIT DIAGRAM

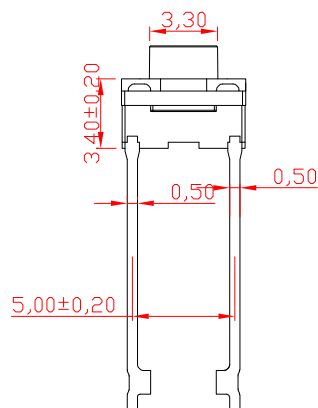

PCB. WELDING DRAWING

Operating Life	100,000
Contact rating	50mA@12V DC.
Insulation resistance	$\geq 100\text{M}\Omega$
Contact resistance	$\leq 50\text{m}\Omega$
Dielectric Strength	250 V 50HZ(1mm)
Travel	$0.3 \pm 0.1\text{mm}$
Storage Temperature	- 30° C to 80° C

E	STEM	LCP	1	Moize
D	COVER	Phosphor copper	1	Silver
C	DOME	Stainless Steel	1	Plated Ag
B	HOUSING	PPA	1	Black
A	PIN	Brass	1	Plated Ag
ITEM	DESCRIPTION	MATERIAL	QTY	FINISH/ COLOR

Type	Operation Force(gF)		Height mm	Button	Leads Shape(G,J,T)	Ground pin (0,1)	Pegs Option (0,1)
YTS1K00 1	2	250±50	Q	15.0	B (BLACK)	T	0 (None)
			P	13.0			
			□	12.0			
			N	11.0			
			M	10.0			
			L	9.0			
			K	8.5			
			J	8.0			
	1	160±50	H	7.5			
			G	7.0			
			F	6.5			
			E	6.0			
			D	5.5			
			C	5.0			
			B	4.5			
			A	4.3			

X. ±0.50	X.* ± 2°	UNITS mm
.X ±0.30	.X* ± 1°	
.XX ±0.10	.XX* ± 0.5°	MAT'L /
.XXX ± 0.05		

THESE DRAWINGS AND SPECIFICATIONS
ARE THE PROPERTY OF YIYUAN
TECHNOLOGY CO.,LTD
AND SHALL NOT BE REPRODUCED.
COPIED OR USED IN ANY MANNER WITHOUT
THE PRIOR WRITTEN CONSENT OF
YIYUAN TECHNOLOGY CO.,LTD

UNITS	mm
-------	----

MAT'L

FINISH

	Q'TY



深圳市怡远科技有限公司

SHENZHEN YIYUAN TECHNOLOGY CO.,LTD

PART NO. YTS1K003	TITLE: TACTILE SWITCH 6x6 WATERPROOF
----------------------	---

APPD: ROGER	DWG NO:
	YTS1K003

CHKD: ROC		SCALE	SHEET	REV.
DR: BILLY WANG 2020/08/21		1/1	1/1	A1

Packaging:
Reel of 1,000 pieces.