

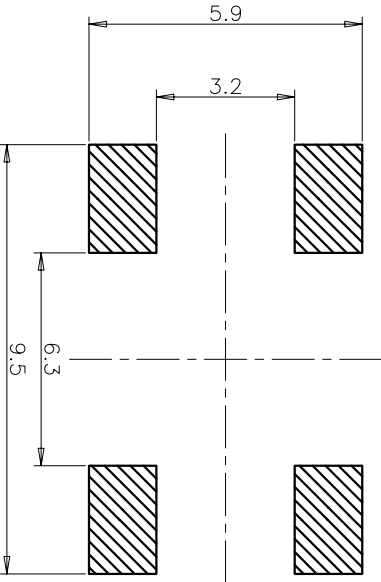
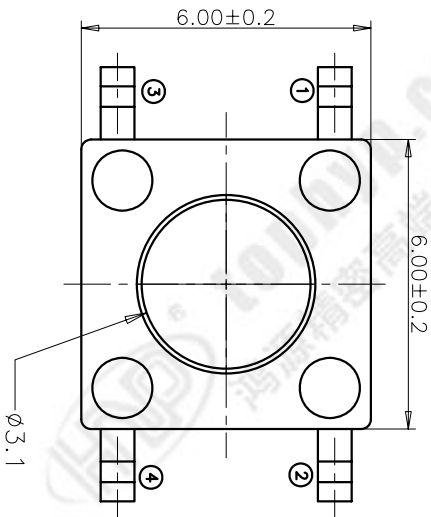




规格 Specifications		
额定负荷 Rating	DC 12V/50mA	
接触电阻 Contact Resistance	100mΩ max.	
绝缘电阻 Insulation resistance	DC100V 60S 100MΩ min.	
抗电强度 Dielectric strength	AC250V(50~60HZ) 60S min.	
操作力 Operation force	160±40gf	
寿命试验 Operating Life	100,000 cycles	
行程 Travels	0.25±0.1mm	

RECOMMENDED P.C.B. LAYOUT

安装尺寸图

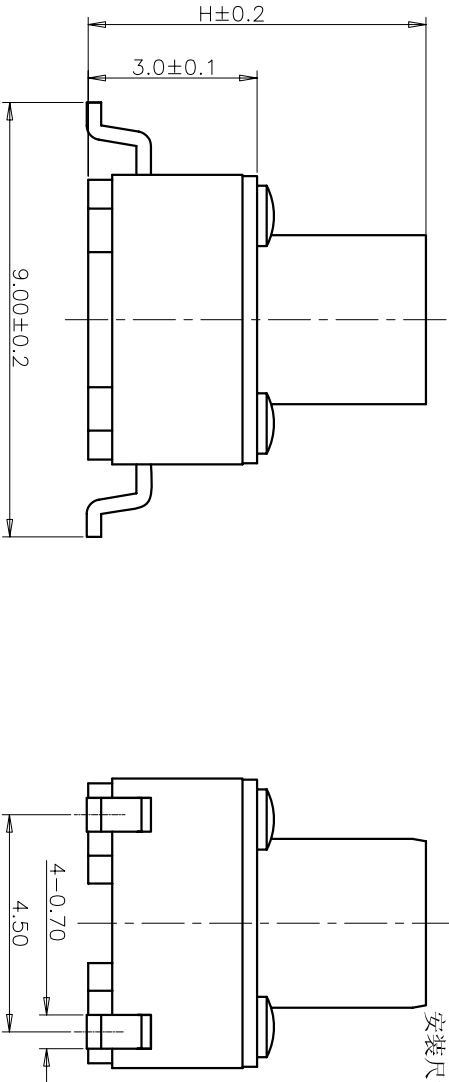

CIRCUIT DIAGRAM

回路图

PRODUCT NO.: 1TS 005F****0****0A2 - CT

轻触开关

系列:

外形:

按钮颜色:

底座颜色:

盖板颜色:

操作力度:

初始颜色, 则不启用

120=120gf

160=160gf

200=200gf

260=260gf

手感:

0=常规(弹片)

材质:

0=初始材质

1=新增材质

依次增加

编带

非编带, 不启用

产品高度 (H):

430=4.3mm

500=5.0mm

600=6.0mm

700=7.0mm

800=8.0mm

900=9.0mm

ITEM	PART NAME	QUANTITY	MATERIAL	FINISH
5	COVER	1	BRASS	Ni-PLATED
4	ACTUATOR	1	PPA	BLACK
3	DOME	1	Stainless Steel/Ag	Ag-PLATED
2	TERMINAL	1	BRASS	Ag-PLATED
1	HOUSING	1	PPA	BLACK
HON YUAN				
NAME(INTENDED USE)			HON YUAN PRECISION IND. CO.,LTD.	
6X6 SERIES			SHENZHEN, CHINA.	
TACT SWITCH			TITLE:	
PART NO.(INTENDED USE)			PRODUCT DRAWING	
1TS005F-1600-8000A2			DWG NO.:	
APPD: W.P.Lu 2018.3.31			1TS005F-1600-8000A2-CT	
CHKD: S.L.Li 2018.3.31			SCALE SHEET REV.	
DR: Y.Y.Chen 2018.3.31			10/1 1/2 A	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF HON YUAN PRECISION IND. CO., LTD. AND SHALL NOT BE REPRODUCED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF HON YUAN