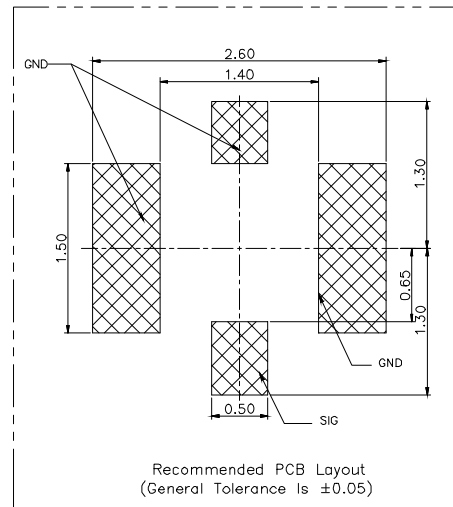
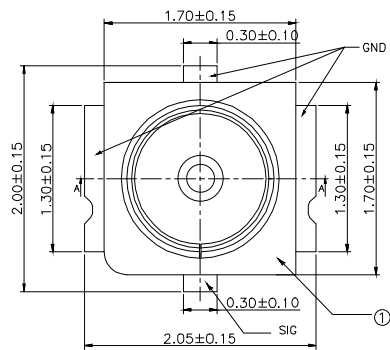


1. Material:see table A
2. Plating:see table A
3. Electrical characteristics
 - 3.1 Rated voltage:60V,50Hz,rms.
 - 3.2 Insulation resistance $\geq 5,00M\Omega$;
 - 3.3 Dielectric withstanding voltage: 200V AC 1 Min;
 - 3.4 Contact resistance:
 - 3.4.1 Inner conductor $\leq 20m\Omega$;
 - 3.4.2 Outer conductor $\leq 20m\Omega$;
 - 3.5 Characteristic impedance:50 Ω .
 - 3.6 VSWR:
 - ≤ 1.3 (DC~3GHz);
 - ≤ 1.4 (3~6GHz).
 - 3.7 Frequency range:DC~6GHz.
4. Environment
 - 4.1 Operating temperature range:
-40°C~+90°C.
 - 4.2 Relative humidity:
 $\leq 95\%$ (40°C $\pm 2^\circ\text{C}$)
 - 4.3 Product should meet HSF requirement;

1	HOUSING	1	THERMOPLASTIC,COLOR:BLACK,UL 94V-0	—
2	CONTACT	1	COPPER ALLOY,PLATING Au	—
3	SHELL	1	COPPER ALLOY,PLATING Au	—
Item	component	Qt'y	Material/Treatment	Note

			GENERAL TOLERANCE	制 图 DRAWING	 深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD			
			DIM TOL	审 核 CHECK				
			X. X ± 0.30	批 准 APPROVAL	产品名称 TITLE	RF 天线座 H=0.85 (3代)	版本 REV.	A
1	初版发行		X. XX ± 0.20	比 例 SCALE	产品料号 PART NO.	HC-RF-IPEX2020-03	单 位 UNITS	mm
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE	X. XXX ± 0.10	投 影 Projection	材 料 MATERIAL		页 次 SHEET	1/1
			Angle $\pm 3.0^\circ$					