


HSF

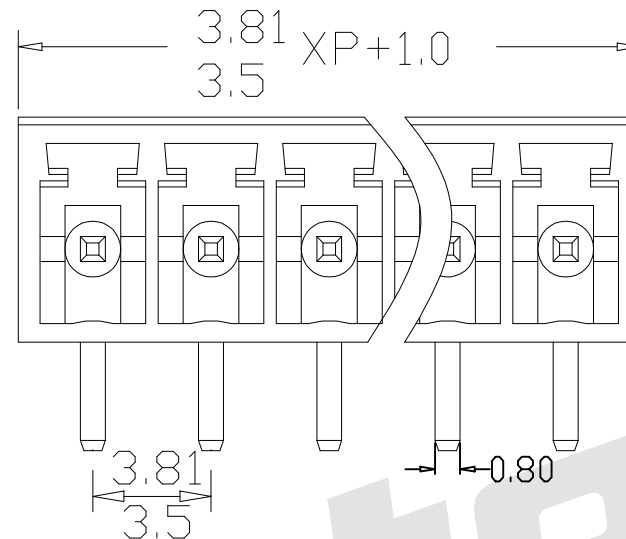




SPECIFICATION

Voltage Rating (额定电压): 125V

Current Rating(额定电流): 8A

Housing(塑件):
PA66+23%GF, UL94V-0

Terminal(端子):
Brass.Tin Plated(黄铜, 镀锡)

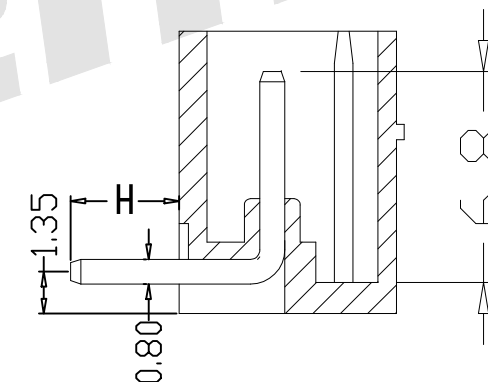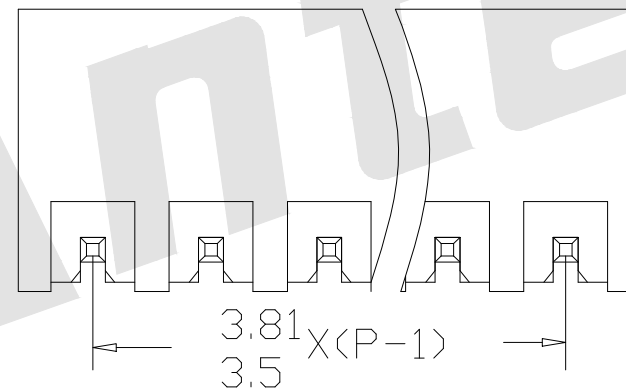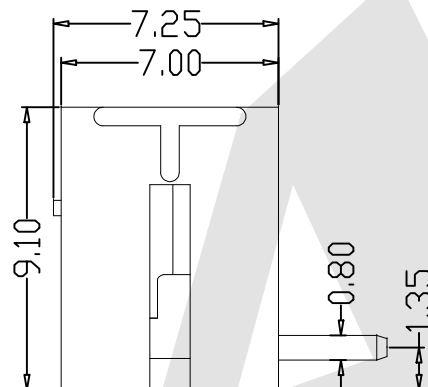

AT2500R - 3.5/3.81 - XX - X - X -FG

Pitch:
3.5: 3.5mm
3.81: 3.81mm

Poles:
02: 2 Contacts
03: 3 Contacts
... ..
16: 16 Contacts

Insulator color:
A:Green
B:Blue
C:Black
G:Gray
0:Orange

Option
A:Type1
H=3.5±0.20
B:Type2
H=2.6±0.20

FG:Series number

Unless Otherwise specified tolerance
X. ±0.35 X.XX: ±0.20
X.X: ±0.25 X.XXX: ±0.15

SCALE:
As Shown
DRAW
Wu Sai
CHECK
BobYang



UNIT:
mm
DATE
22/03/2018
DATE
22/03/2018



ANTENK ELECTRONICS CO.,LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE:
Plug-in Terminal Block Close
Right-Angle Pitch:3.5/3.81

DRAWING NO: AT2500R-3.5/3.81XXXX-FG

PRODUCT NO: AT2500R-3.5/3.81XXXX-FG

REV

DESCRIPTION

DATE