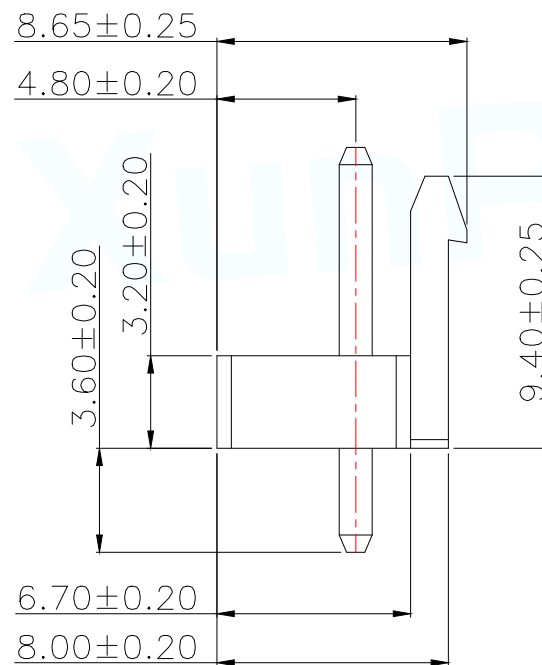
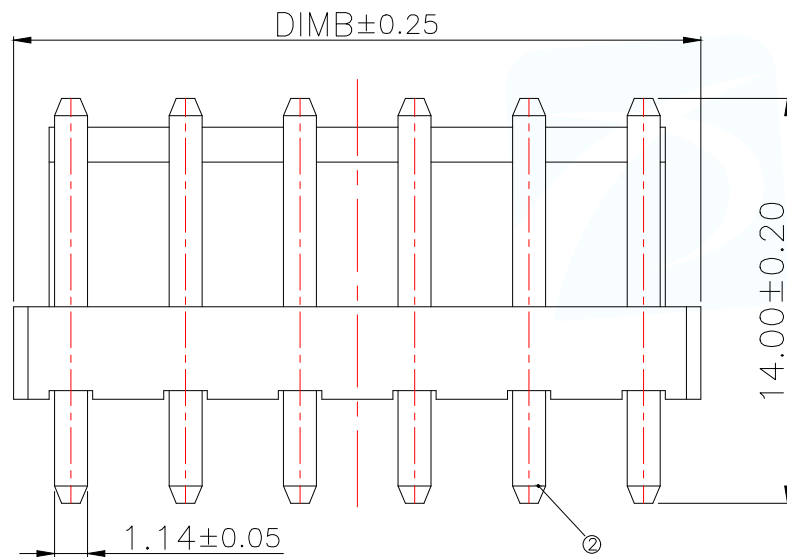
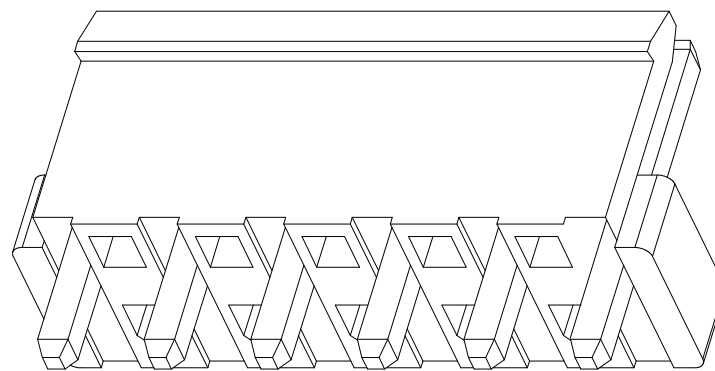
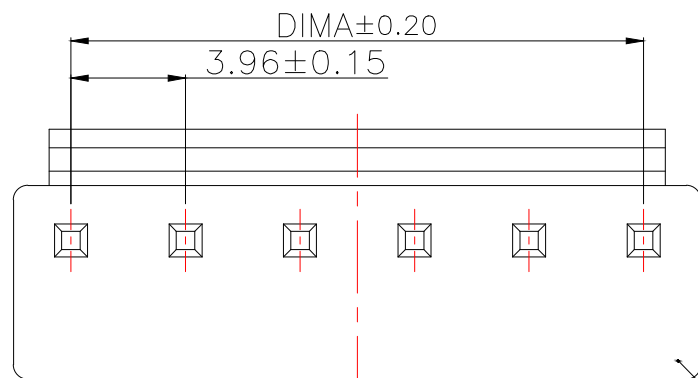


适用线路板(PCB LAYOUT)

序号	品名	材质
1	VH3.96 胶芯	PA66 UL94V-2 Beige
2	VH3.96 直针 端子	Copper Alloy/ Tin Plating

Technical Index:

- 1.Temperature range: -25℃~85℃.
- 2.Rated voltage: 250V DC/AC(rms).
- 3.Rated current: 7.0A.
- 4.Contact resistance: ≤20mΩ.
- 5.Withstanding voltage: 1500V AC/minute.
- 6.Insulation resistance: ≥1000MΩ.

MANUFACTURE DWG

UNLESS OTHERWISE
SPECIFIED TOLERANCES

DECIMALS:

X.:±0.50

.X:±0.20

.XX:±0.10

ANGLES:

X'.:±5°

X.X':±3°

X.XX':±1°

东莞市讯普电子科技有限公司
DongGuan XunPu Electronics Co.,Ltd

TITLE:

VH3.96 直针

PAR

WAFER-VH3.96-NPZZ-Y62

DWN

CHKD

APVD

SCALE:1:1

UNIT:MM

SIZE:A4

SHEET:1F1

REV:A