

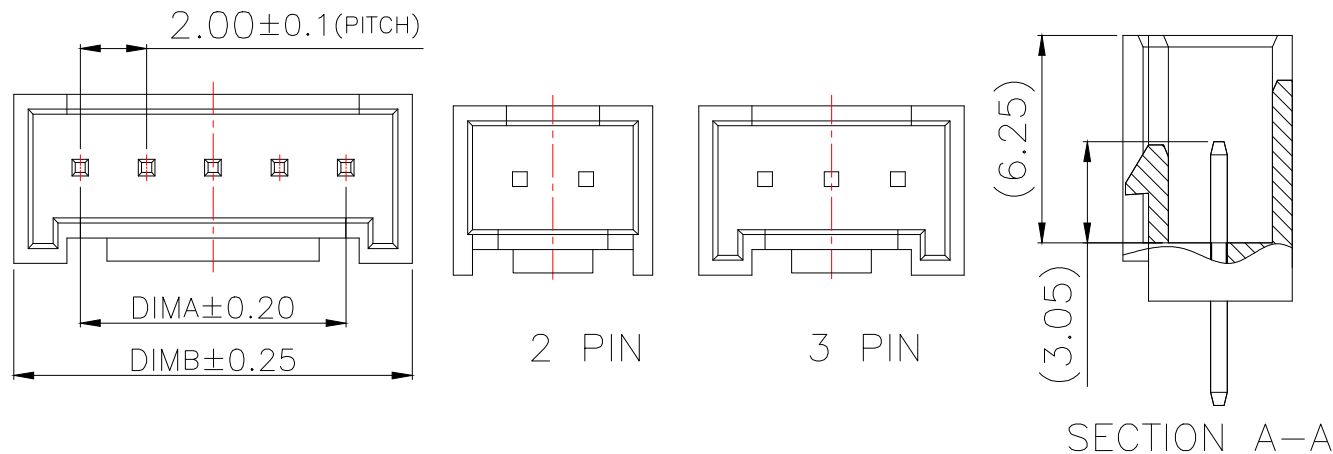


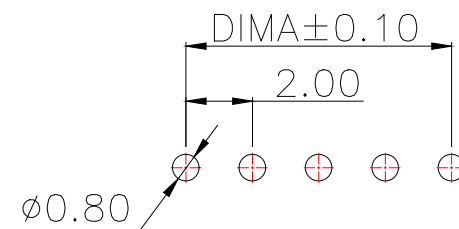

Part No	Pin	A	B
WAFER-HY2.0-2PZZ-Y62	2	2.00	6.00
WAFER-HY2.0-3PZZ-Y62	3	4.00	8.00
WAFER-HY2.0-4PZZ-Y62	4	6.00	10.00
WAFER-HY2.0-5PZZ-Y62	5	8.00	12.00
WAFER-HY2.0-6PZZ-Y62	6	10.00	14.00
WAFER-HY2.0-7PZZ-Y62	7	12.00	16.00
WAFER-HY2.0-8PZZ-Y62	8	14.00	18.00
WAFER-HY2.0-9PZZ-Y62	9	16.00	20.00
WAFER-HY2.0-10PZZ-Y62	10	18.00	22.00
WAFER-HY2.0-11PZZ-Y62	11	20.00	24.00
WAFER-HY2.0-12PZZ-Y62	12	22.00	26.00
WAFER-HY2.0-13PZZ-Y62	13	24.00	28.00
WAFER-HY2.0-14PZZ-Y62	14	26.00	30.00
WAFER-HY2.0-15PZZ-Y62	15	28.00	32.00
WAFER-HY2.0-16PZZ-Y62	16	30.00	34.00
WAFER-HY2.0-17PZZ-Y62	17	32.00	36.00
WAFER-HY2.0-18PZZ-Y62	18	34.00	38.00
WAFER-HY2.0-19PZZ-Y62	19	36.00	40.00
WAFER-HY2.0-20PZZ-Y62	20	38.00	42.00

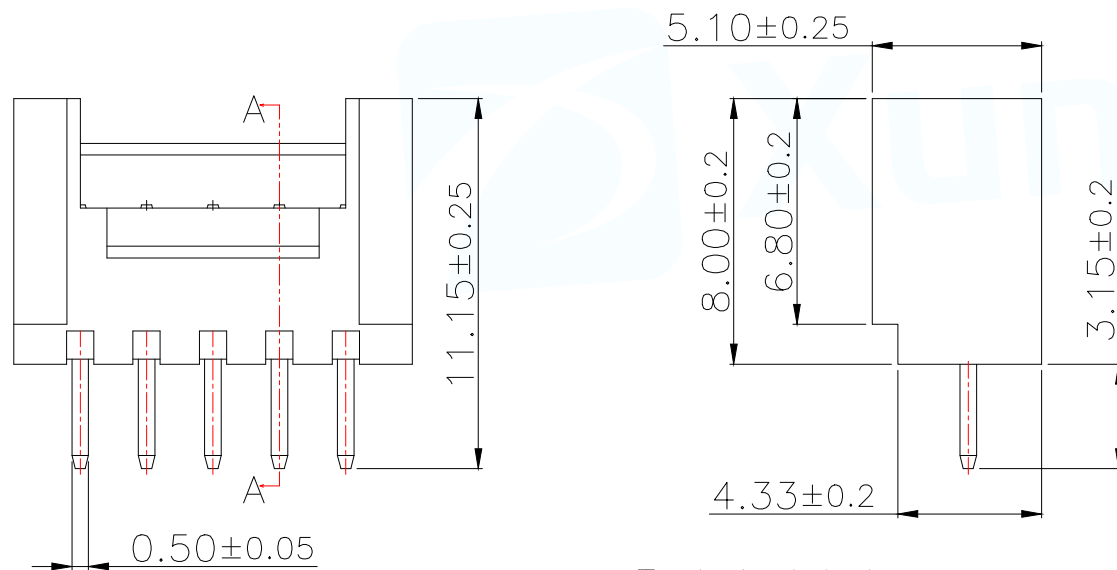

序号	品名	材质
1	HY2.0 直针 胶芯	PA66 UL94V-2 Beige
2	HY2.0 直针 端子	Copper Alloy/ Tin Plating

Technical Index:
1. Temperature range: $-25^{\circ}\text{C}\sim 85^{\circ}\text{C}$.
2. Rated voltage: 200V
DC/AC(rms).
3. Rated current: 2.0A.
4. Contact resistance: $\leq 25\text{m}\Omega$.
5. Withstanding voltage: 500V
AC/minute.
6. Insulation resistance: $\geq 1000\text{M}\Omega$.

适用线路板(PCB LAYOUT)

MANUFACTURE DWG		东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd	
UNLESS OTHERWISE SPECIFIED TOLERANCES		TITLE: HY2.0 直针带扣	
DECIMALS:	ANGLES:	PAR	WAFER-HY2.0-NPZZ-Y62
X.:±0.50	X':.:±5°	DWN	
.X:±0.20	X.X':.:±3°	CHKD	
.XX:±0.10	X.XX':.:±1°	APVD	
CUSTOMER COPY		SCALE:1:1	UNIT:MM
		SIZE:A4	SHEET:1F1
			REV:A