


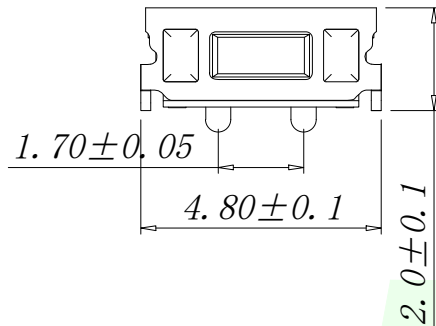
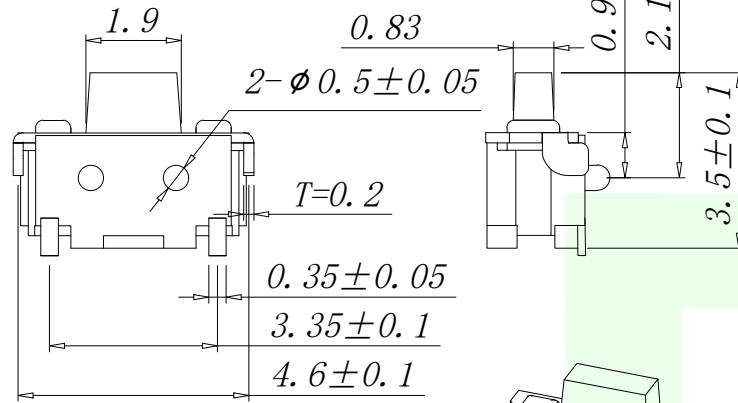


RoHs


VER	MARK	PR. BY	DESCRIPTION	DATE



TS2011C-411-AA

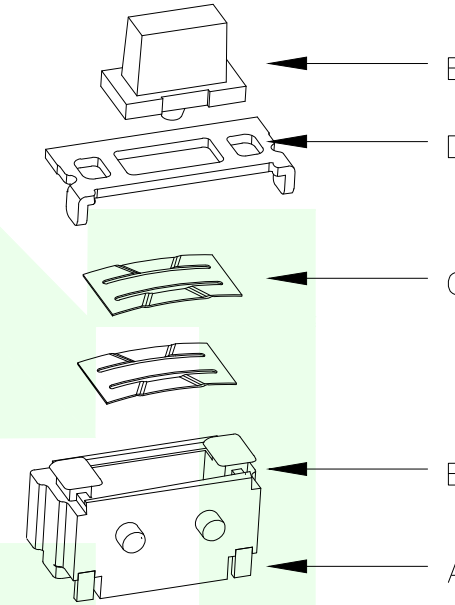

CIRCUIT DIAGRAM

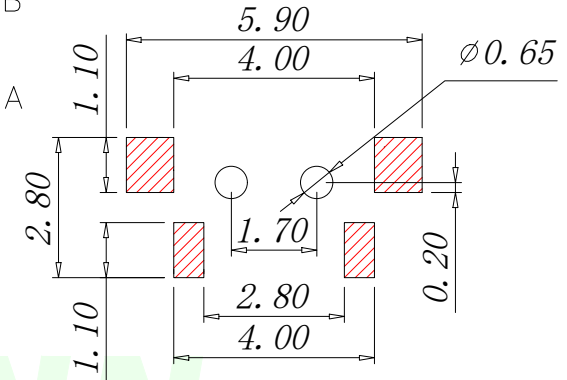

PCB.WELDING DRAWING

The Main Thchnology Performance

Rate voltage,current	50mA DC12V
Contact resistance	$\leq 100m\Omega$
Operating force	$\pm 50gf$
Travel	$0.20 \pm 0.10mm$
Insulated resistance	$\geq 100M\Omega$
Dielectric strength	$\geq 250VAC/1min$

E	按钮	LCP	1	黑色
D	盖板	黄铜	1	镀银
C	弹片	不锈钢	1	镀银
B	本体	LCP	1	白色
A	卡件	黄铜	1	镀银
ITEM	DESCRIPTION	MATERIAL	QTY	FINSH/COLOR

按力码 按力可定制
100=10
150=15
280=28

高度码
H3. 5=035

GENERAL TOLERANCES
UNLESS SPECIFIED

X.X ± 0.35	X. $^{\circ}$ $\pm 5^{\circ}$
.XX ± 0.25	X.X $^{\circ}$ $\pm 3^{\circ}$
.XXX ± 0.15	X.XX $^{\circ}$ $\pm 1^{\circ}$

MANUFACTURE DWG



深圳市华明通电子有限公司
Shenzhen Huamingtong Electronics Co., Ltd

PART NO.
TS2011C-411-AA

TITLE:
2x4 SMD TACT SWITCH

DESIGN: James
CHED: Talen
APPD: Sophia

CUSTOMER	SIZE	UNITS
	A4	MM
	SCALE	SHEET
	N:A	1/1