
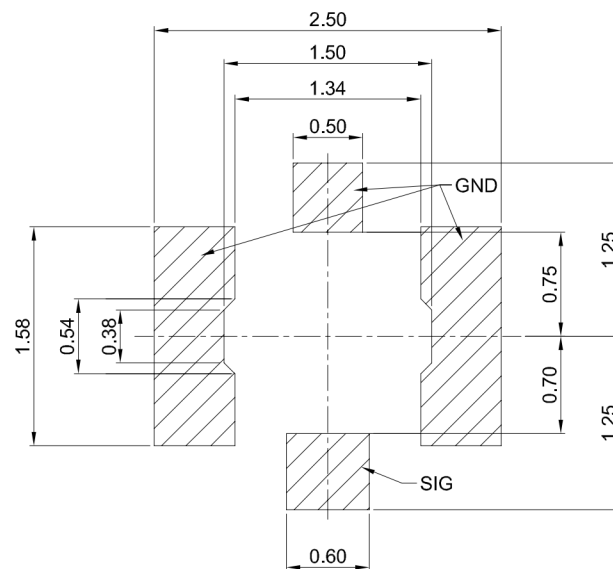
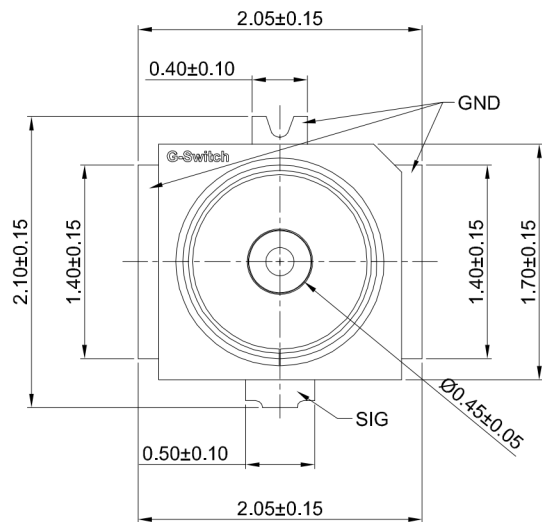
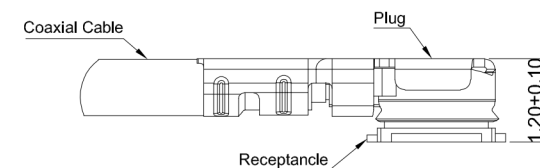


RECOMMENDED PCB LAYOUT
TOLERANCE:±0.05



AFTER MATING

G-Switch RF Specification:

- 1.Contact Resistance: 20mΩ Max;
- 2.Dielectric Withstanging Voltage: 200V AC For 1 Minute;
- 3.Insulation Resistance: 1000MΩ Min;
- 4.Frequency Range: DC up to 6GHz
Vswr:1.3 Max. at 0~3GHz;
Vswr:1.4 Max. at 3~6GHz;
- 5.Operating Temperature: -40°Cto +90°C.

ITEM	TITLE	MATERIAL/FINISH
1	TERMINAL	COPPER ALLOY/GOLD PLATED OVER Ni
2	SHELL	PHOSPHOROUS COPPER/Gold PLATED OVER Ni
3	HOUSING	LCP UL94V-0/BLACK



RoHS
Compliant
2002/95/EC



SCALE: 9:1 UNIT: mm
SIZE: A4

Unless otherwise
General Tolerance:
X. ±0.30
X.x ±0.20
X.xx ±0.15
X.xxx ±0.10
Angles ±3°

Title: RF IV Receptacle Conn
SMT 1.7×1.7×H0.60mm

Molde Code: GT-RF4060A-02G

DRAWN	CHECKED	APPROVED	DATE
Xia	Chen	Chen	2023.10.07

品赞科技®
b-Switch

REV: A0 SHEET: 1/1