
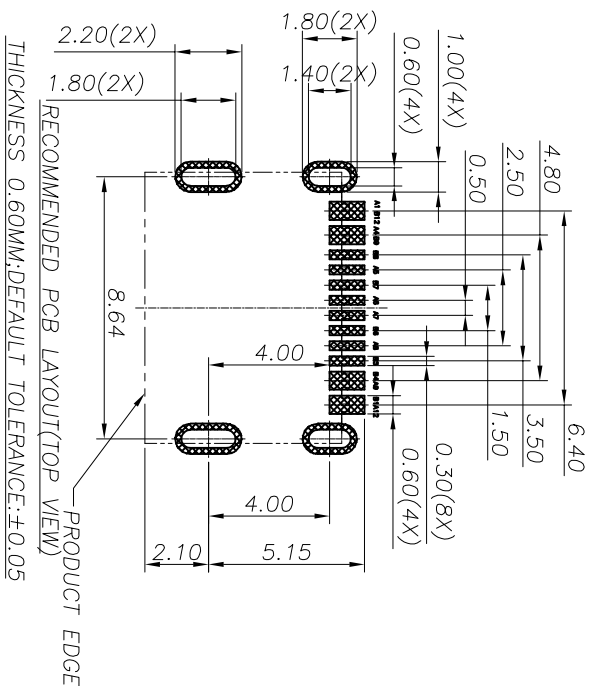
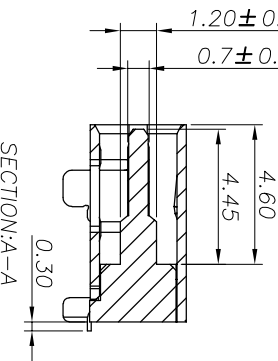
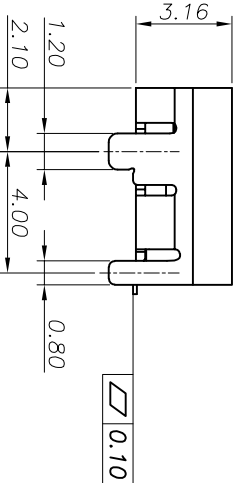


REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
---	---	新版本发行			2024.10.10

- NOTES:
- SPECIFICATION:
- CURRENT RATING: 5.0A MAX
 - VOLTAGE: 100 VAC
 - TEMPERATURE RANGE: -30 °C ~ 85 °C
 - CONTACT RESISTANCE: 40 MILLIONHM MAX
 - INSULATION RESISTANCE: 100 MEGOHMS MIN.
 - INSERTION FORCE: 5N~20N
 - UNMATING FORCE: 8N~20N
 - DURABILITY: 10,000 CYCLES

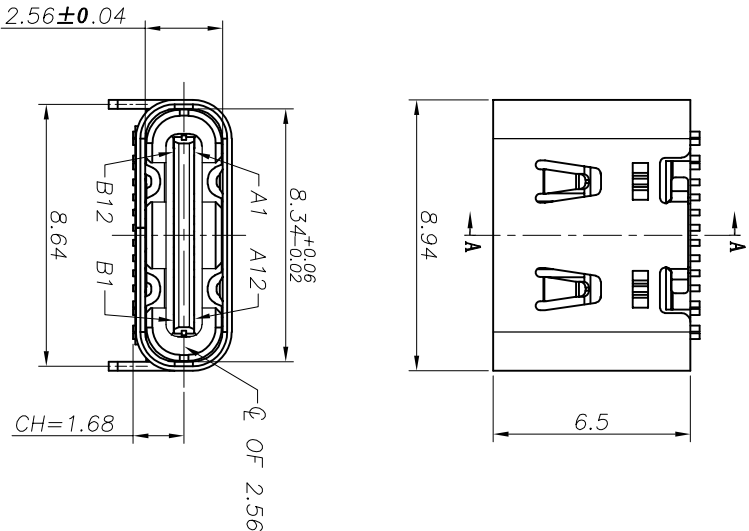

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DM1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

7	COVER SHELL	STAINLESS STEEL	NI Plated	1PCS						
	FRONT SHELL	STAINLESS STEEL	NI Plated	1PCS						
5	SHIELDING PLATE	STAINLESS STEEL	----	1PCS						
4	MD	HIGH TEMPERATURE PLASTIC	BLACK	1PCS						
3	CONTACT	COPPER ALLOY	Au/Ni, TIN Plated	1SET						
2	CONTACT	COPPER ALLOY	Au/Ni, TIN Plated	1SET						
	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS						
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY						
TOLERANCE		NAME(INTENDED USE) CUSTOMER DRAWING								
X.X ±0.30	X.* ± 2*	PART NO.	TITLE:							
.XX ±0.20	.X.* ± 1*	AAOB011-017N	USB C F单排10P 板上6.5 带弹片和凸包							
.XXX ±0.10	.XX* ±0.5*									
UNITS	mm	APPD:	DRAWG NO. AA0-017N							
MATERILA		CHED:								
FINISH		DRAW:	<table><tr><td>SCALE</td><td>SHEET</td><td>REV.</td></tr><tr><td>1:1</td><td>1/2</td><td>A</td></tr></table>		SCALE	SHEET	REV.	1:1	1/2	A
SCALE	SHEET	REV.								
1:1	1/2	A								