


绝缘端子系列

Insulated Terminal Series




叉形绝缘端子
PVC-Insulated Fork Terminal

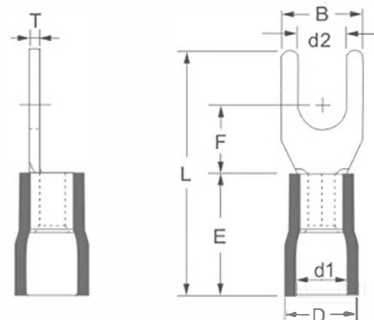

绝缘端子系列
Insulated Terminal
Series

型号 ITEM NO .	STUD SIZE 美制螺栓号 螺栓口直径		尺寸 DIMENSION mm							包装 PCS/ PACK	颜色 COLOR	说明 EXPLANATION
	American	Metric d2	B	F	L	E	D	d1	T			
SV1.25-3	#4	3.2	5.7	6.5	21.5	10.3	6.0	4.6	0.7	1000	红 Red	导线截面:0.5~1.5mm ² (美国线规22~16) 最大电流: I _{max} =19A 材质:紫铜 绝缘套管: PVC Lead Section: 0.5~1.5mm ² (A.W. G.22-16) Max Current:I _{max} =19A Material:Copper Insulation: PVC
SV1.25-3.5S	#6	3.7										
SV1.25-3.5L	#6	3.7	6.4									
SV1.25-4S	#8	4.3										
SV1.25-4M	#8	4.3	7.2									
SV1.25-4L	#8	4.3	8.1									
SV1.25-5S	#10	5.3										
SV1.25-5L	#10	5.3	9.5									
SV1.25-6S	1/4	6.5										
SV1.25-6L	1/4	6.5	12.0	11.0	27.5							
SV1.25-8	5/16	8.5	14.0	12.0	28.7							
SV2-3	#4	3.2	5.7	6.5	21.5	10.3	6.6	5.2	0.8	1000	蓝 Blue	导线截面:1.5~2.5mm ² (美国线规16~14) 最大电流: I _{max} =27A 材质:紫铜 绝缘套管: PVC Lead Section: 1.5~2.5mm ² (A.W. G.16-14) Max Current:I _{max} =27A Material:Copper Insulation: PVC
SV2-3.5S	#6	3.7										
SV2-3.5L	#6	3.7	6.5									
SV2-4S	#8	4.3										
SV2-4M	#8	4.3	7.2									
SV2-4L	#8	4.3	8.2									
SV2-5S	#10	5.3										
SV2-5L	#10	5.3	9.5									
SV2-6S	1/4	6.5										
SV2-6L	1/4	6.5	12.0	11.0	27.5							
SV2-8	5/16	8.5	14.0	12.5	28.7							


叉形绝缘端子 PVC-Insulated Fork Terminal

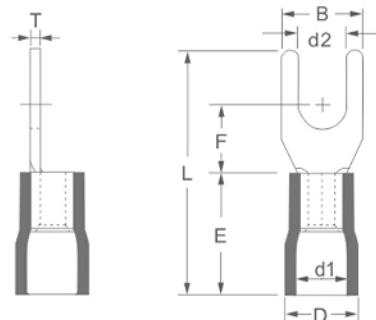

型号 ITEM NO .	STUD SIZE 美制螺栓号 螺栓口直径		尺寸 DIMENSION mm							包装 PCS/ PACK	颜色 COLOR	说明 EXPLANATION							
	American	Metric d2	B	F	L	E	D	d1	T										
SV3.5-3	#4	3.2	8.0	7.0	25.3	13.0	7.8	6.4	1.0	500	 黑 Black	导线截面:2.5~4mm ² (美国线规14~12) 最大电流: I _{max} =37A 材质:紫铜 绝缘套管: PVC							
SV3.5-3.5	#6	3.7																	
SV3.5-4	#8	4.3																	
SV3.5-5S	#10	5.3																	
SV3.5-6S	1/4	6.5	9.0	7.5	26.0								13.3	8.2	6.5	1.0	500	 黄 Yellow	Lead Section: 2.5~4mm ² (A.W. G.14-12) Max Current:I _{max} =37A Material:Copper Insulation: PVC
SV3.5-6L	1/4	6.5	12.0	9.1	28.5														
SV3.5-8	5/16	8.5	14.0	11.5	30.8														
SV3.5-10	3/8	10.5	17.5	12.5	33.5														
SV5.5-3	#4	3.2	8.3	7.5	26.0	13.3	8.2	6.5	1.0	500	 黄 Yellow	导线截面:4~6mm ² (美国线规12~10) 最大电流: I _{max} =48A 材质:紫铜 绝缘套管: PVC							
SV5.5-3.5	#6	3.7																	
SV5.5-4S	#8	4.3																	
SV5.5-4L	#8	4.3	8.9		26.5								12.0	31.6					
SV5.5-5	#10	5.3	9.0		26.0														
SV5.5-6S	1/4	6.5																	
SV5.5-6L	1/4	6.5	12.0	12.0	31.6														
SV5.5-8	5/16	8.5	14.0																
SV5.5-10	3/8	10.5	17.5										12.5	33.5					



叉形绝缘端子
PVC-Insulated Fork Terminal

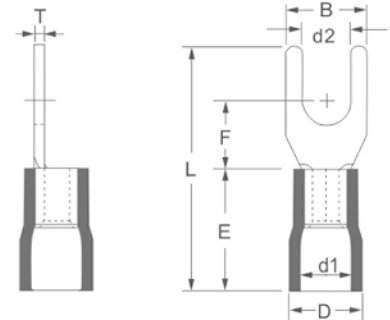

绝缘端子系列
Insulated Terminal Series

型号 ITEM NO .	STUD SIZE 美制螺栓号 螺栓口直径		尺寸 DIMENSION mm							包装 PCS/ PACK	颜色 COLOR	说明 EXPLANATION							
	American	Metric d2	B	F	L	E	D	d1	T										
SV8-4S	#8	4.3	8.0	7.2	30.0	15.5	10.2	8.3	1.2	500	● 红 Red	导线截面:8~10mm ² (美国线规8) 最大电流: I _{max} =62A 材质:紫铜 绝缘套管: PVC Lead Section: 8~10mm ² (A.W. G.8) Max Current:I _{max} =62A Material;Copper Insulation: PVC							
SV8-4M	#8	4.3	9.0	7.5	30.5														
SV8-4L	#8	4.3	10.5	9.0	30.0														
SV8-5S	#10	5.3	9.0	7.5	28.2														
SV8-5M	#10	5.3			30.5														
SV8-5L	#10	5.3	10.8	7.2	30.0														
SV8-6	1/4	6.5																	
SV8-8	5/16	8.5			14.5								35.0						
SV8-10	3/8	10.5	16.0																
SV14-4	#8	4.3	9.0	12.0	37.8	21.5	12.0	10.5	1.5	200	● 蓝 Blue	导线截面:10~16mm ² (美国线规6) 最大电流: I _{max} =88A 材质:紫铜 绝缘套管: PVC Lead Section: 10~16mm ² (A.W. G.6) Max Current:I _{max} =88A Material;Copper Insulation: PVC							
SV14-5	#10	5.3	11.0	10.2	38.7														
SV14-6	1/4	6.5			10.7														
SV14-8	5/16	8.5	13.8																
SV14-10	3/8	10.5	15.9	39.0															
SV22-5	#10	5.3	12.8	13.5	44.5	23.5	15.8	13.3	1.8	100	● 黄 Yellow	导线截面:16~25mm ² (美国线规4) 最大电流: I _{max} =115A 材质:紫铜 绝缘套管: PVC Lead Section: 16~25mm ² (A.W. G.4) Max Current:I _{max} =115A Material;Copper Insulation: PVC							
SV22-6	1/4	6.5			16.5														
SV22-8S	5/16	8.5																	
SV22-8	5/16	8.5	16.5	13.7	45.0														
SV22-10	3/8	10.5																	