



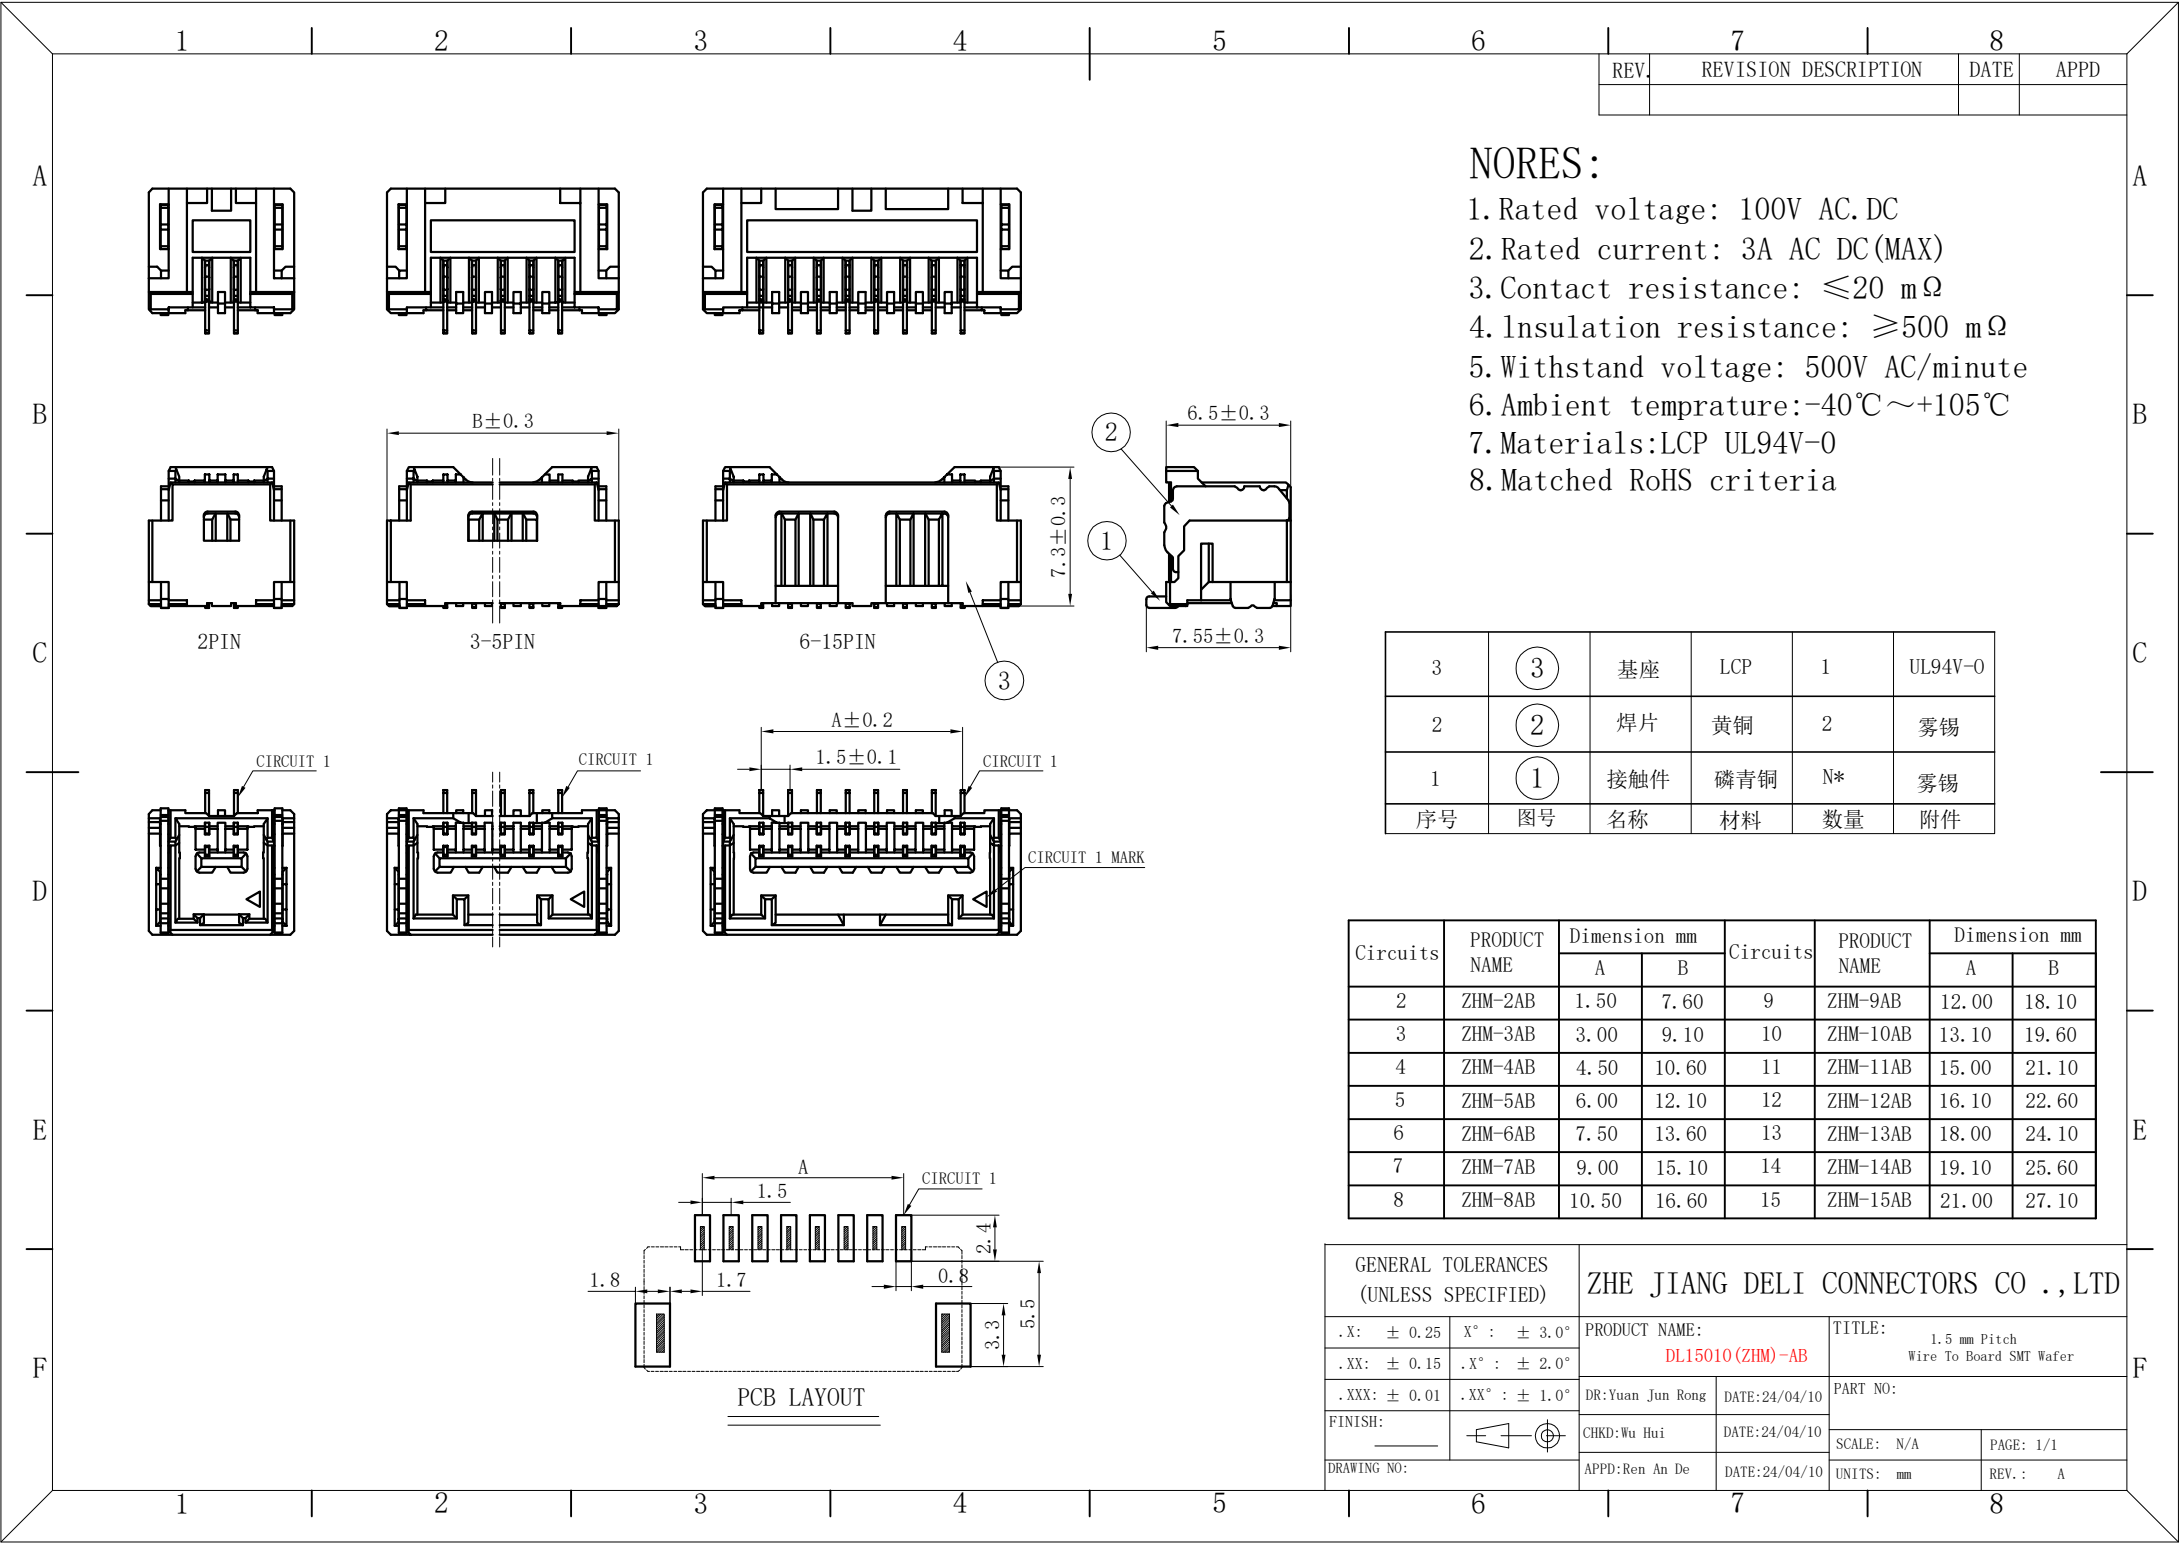

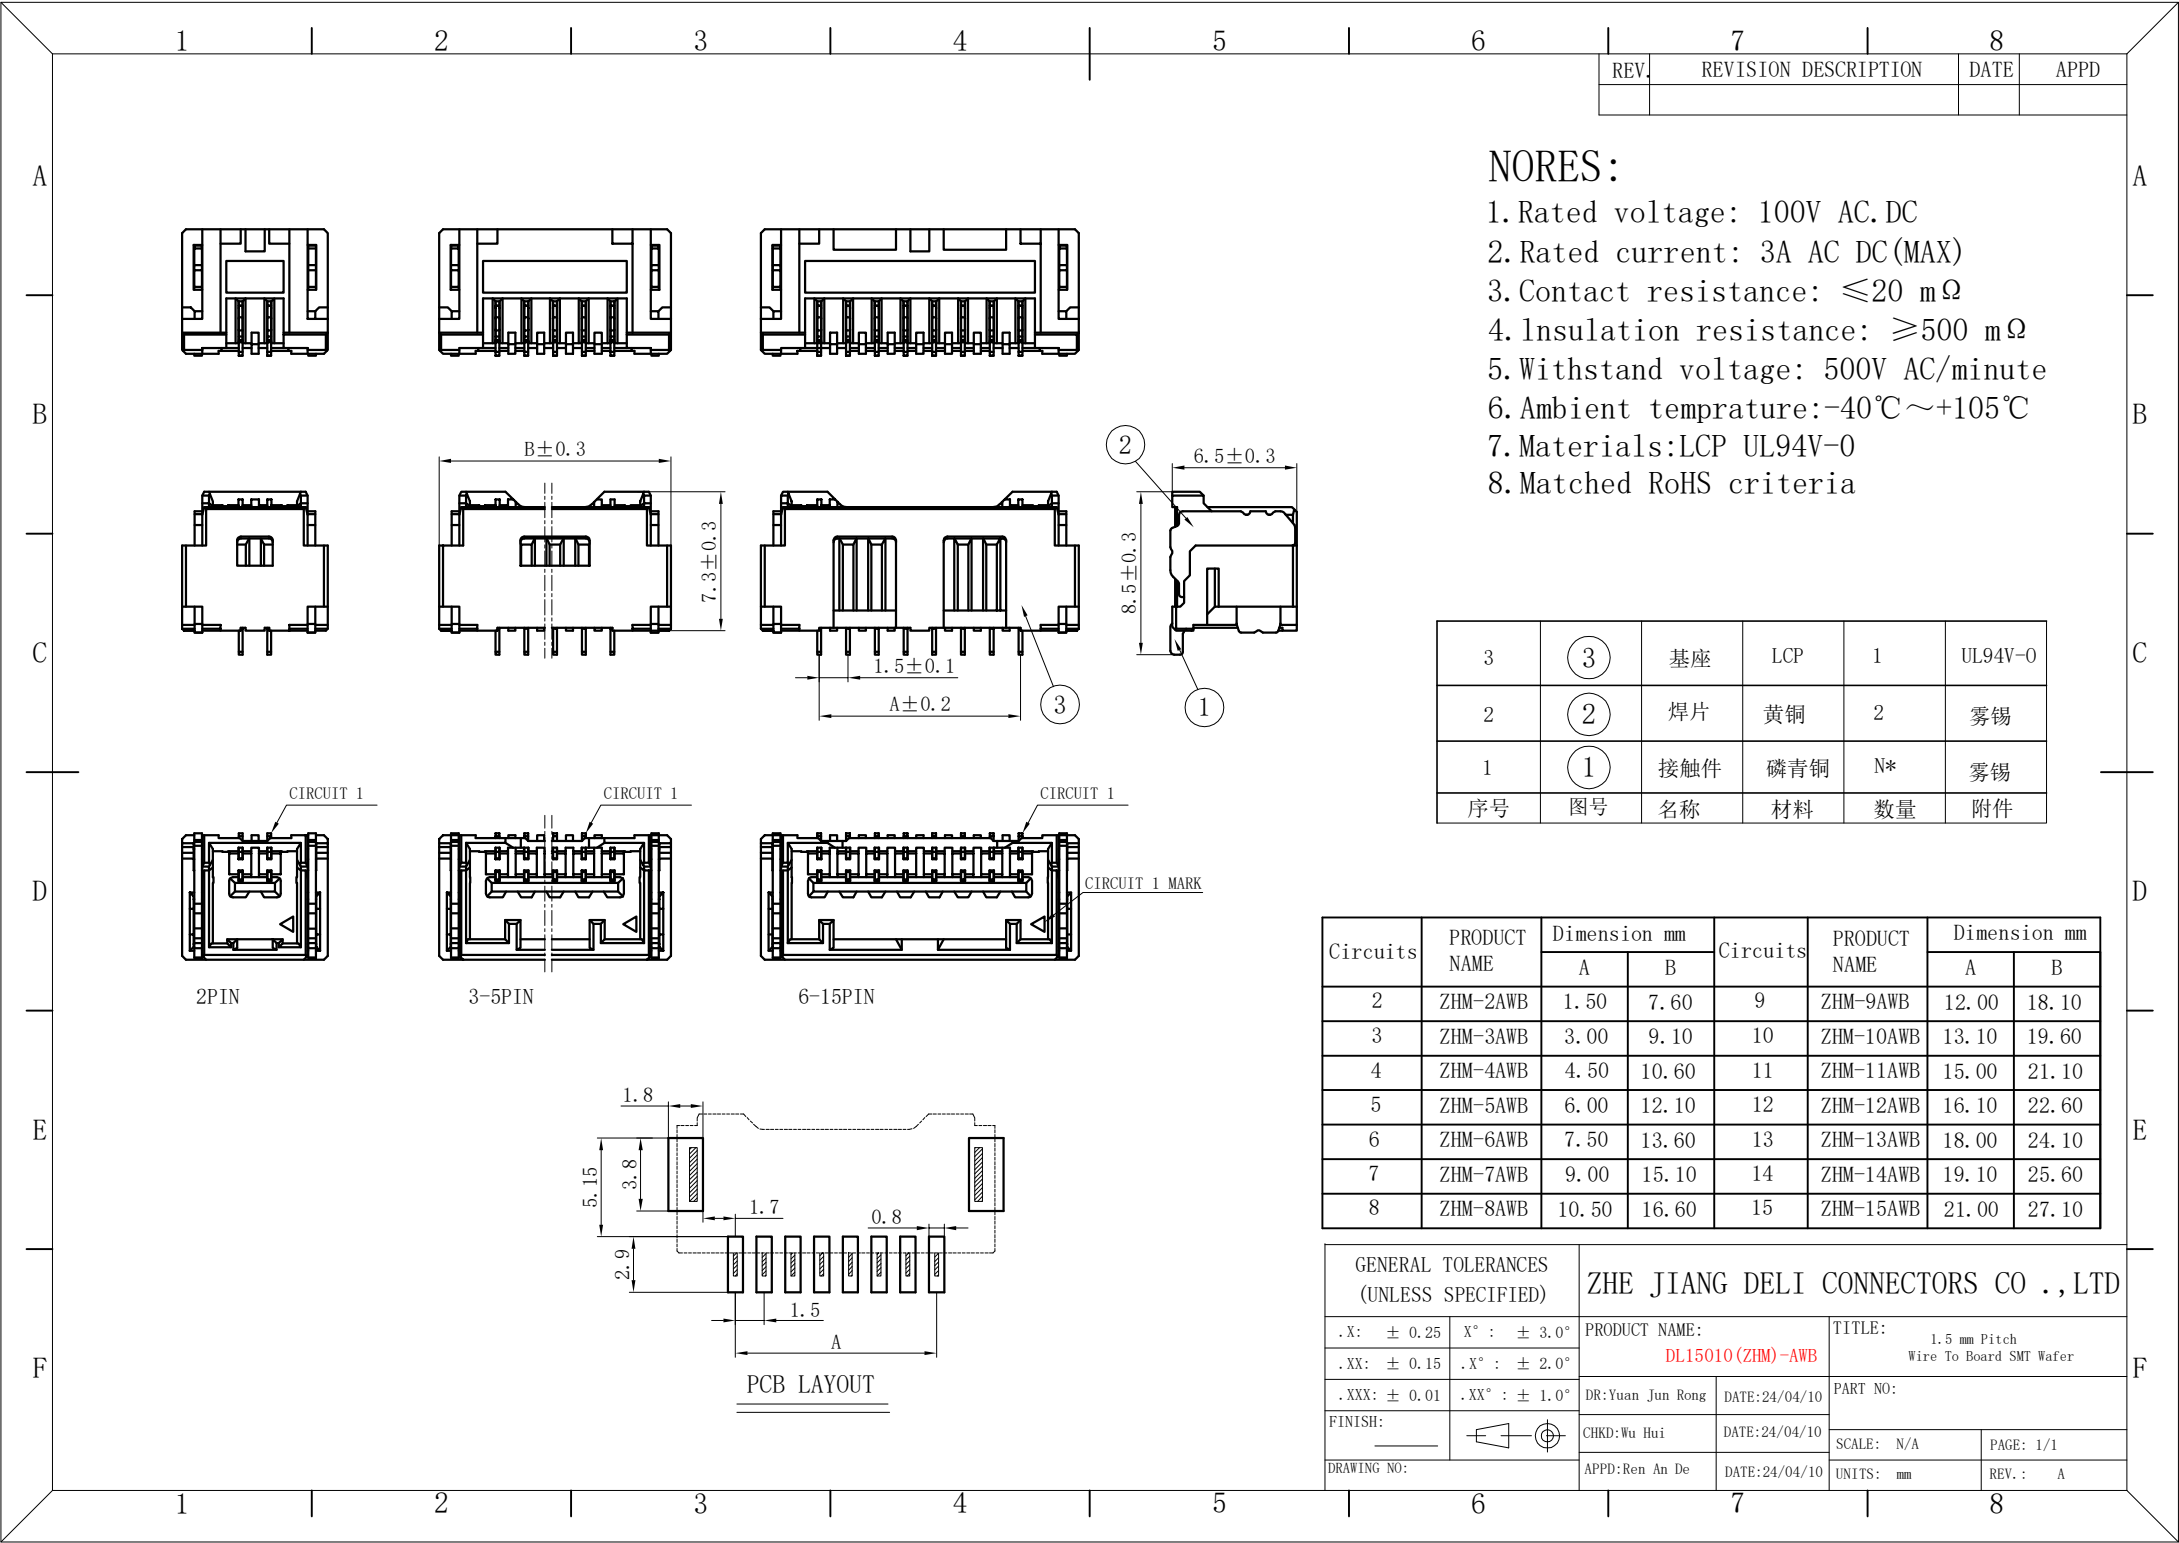


NORES:

1. Rated voltage: 100V AC.DC
2. Rated current: 3A AC DC (MAX)
3. Contact resistance: $\leq 20 \text{ m}\Omega$
4. Insulation resistance: $\geq 500 \text{ m}\Omega$
5. Withstand voltage: 500V AC/minute
6. Ambient temprature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
7. Materials: LCP UL94V-0
8. Matched RoHS criteria

3	③	基座	LCP	1	UL94V-0
2	②	焊片	黄铜	2	雾锡
1	①	接触件	磷青铜	N*	雾锡
序号	图号	名称	材料	数量	附件

Circuits	PRODUCT NAME	Dimension mm		Circuits	PRODUCT NAME	Dimension mm	
		A	B			A	B
2	ZHM-2AWB	1.50	7.60	9	ZHM-9AWB	12.00	18.10
3	ZHM-3AWB	3.00	9.10	10	ZHM-10AWB	13.10	19.60
4	ZHM-4AWB	4.50	10.60	11	ZHM-11AWB	15.00	21.10
5	ZHM-5AWB	6.00	12.10	12	ZHM-12AWB	16.10	22.60
6	ZHM-6AWB	7.50	13.60	13	ZHM-13AWB	18.00	24.10
7	ZHM-7AWB	9.00	15.10	14	ZHM-14AWB	19.10	25.60
8	ZHM-8AWB	10.50	16.60	15	ZHM-15AWB	21.00	27.10

GENERAL TOLERANCES (UNLESS SPECIFIED)		ZHE JIANG DELI CONNECTORS CO., LTD			
.X: ± 0.25	X°: $\pm 3.0^{\circ}$	PRODUCT NAME: DL15010 (ZHM)-AWB		TITLE: 1.5 mm Pitch Wire To Board SMT Wafer	
.XX: ± 0.15	.X°: $\pm 2.0^{\circ}$	DR: Yuan Jun Rong		DATE: 24/04/10	
.XXX: ± 0.01	.XX°: $\pm 1.0^{\circ}$	CHKD: Wu Hui		DATE: 24/04/10	
FINISH:		APPD: Ren An De		DATE: 24/04/10	
DRAWING NO:		UNITS: mm		PAGE: 1/1	
				REV.: A	

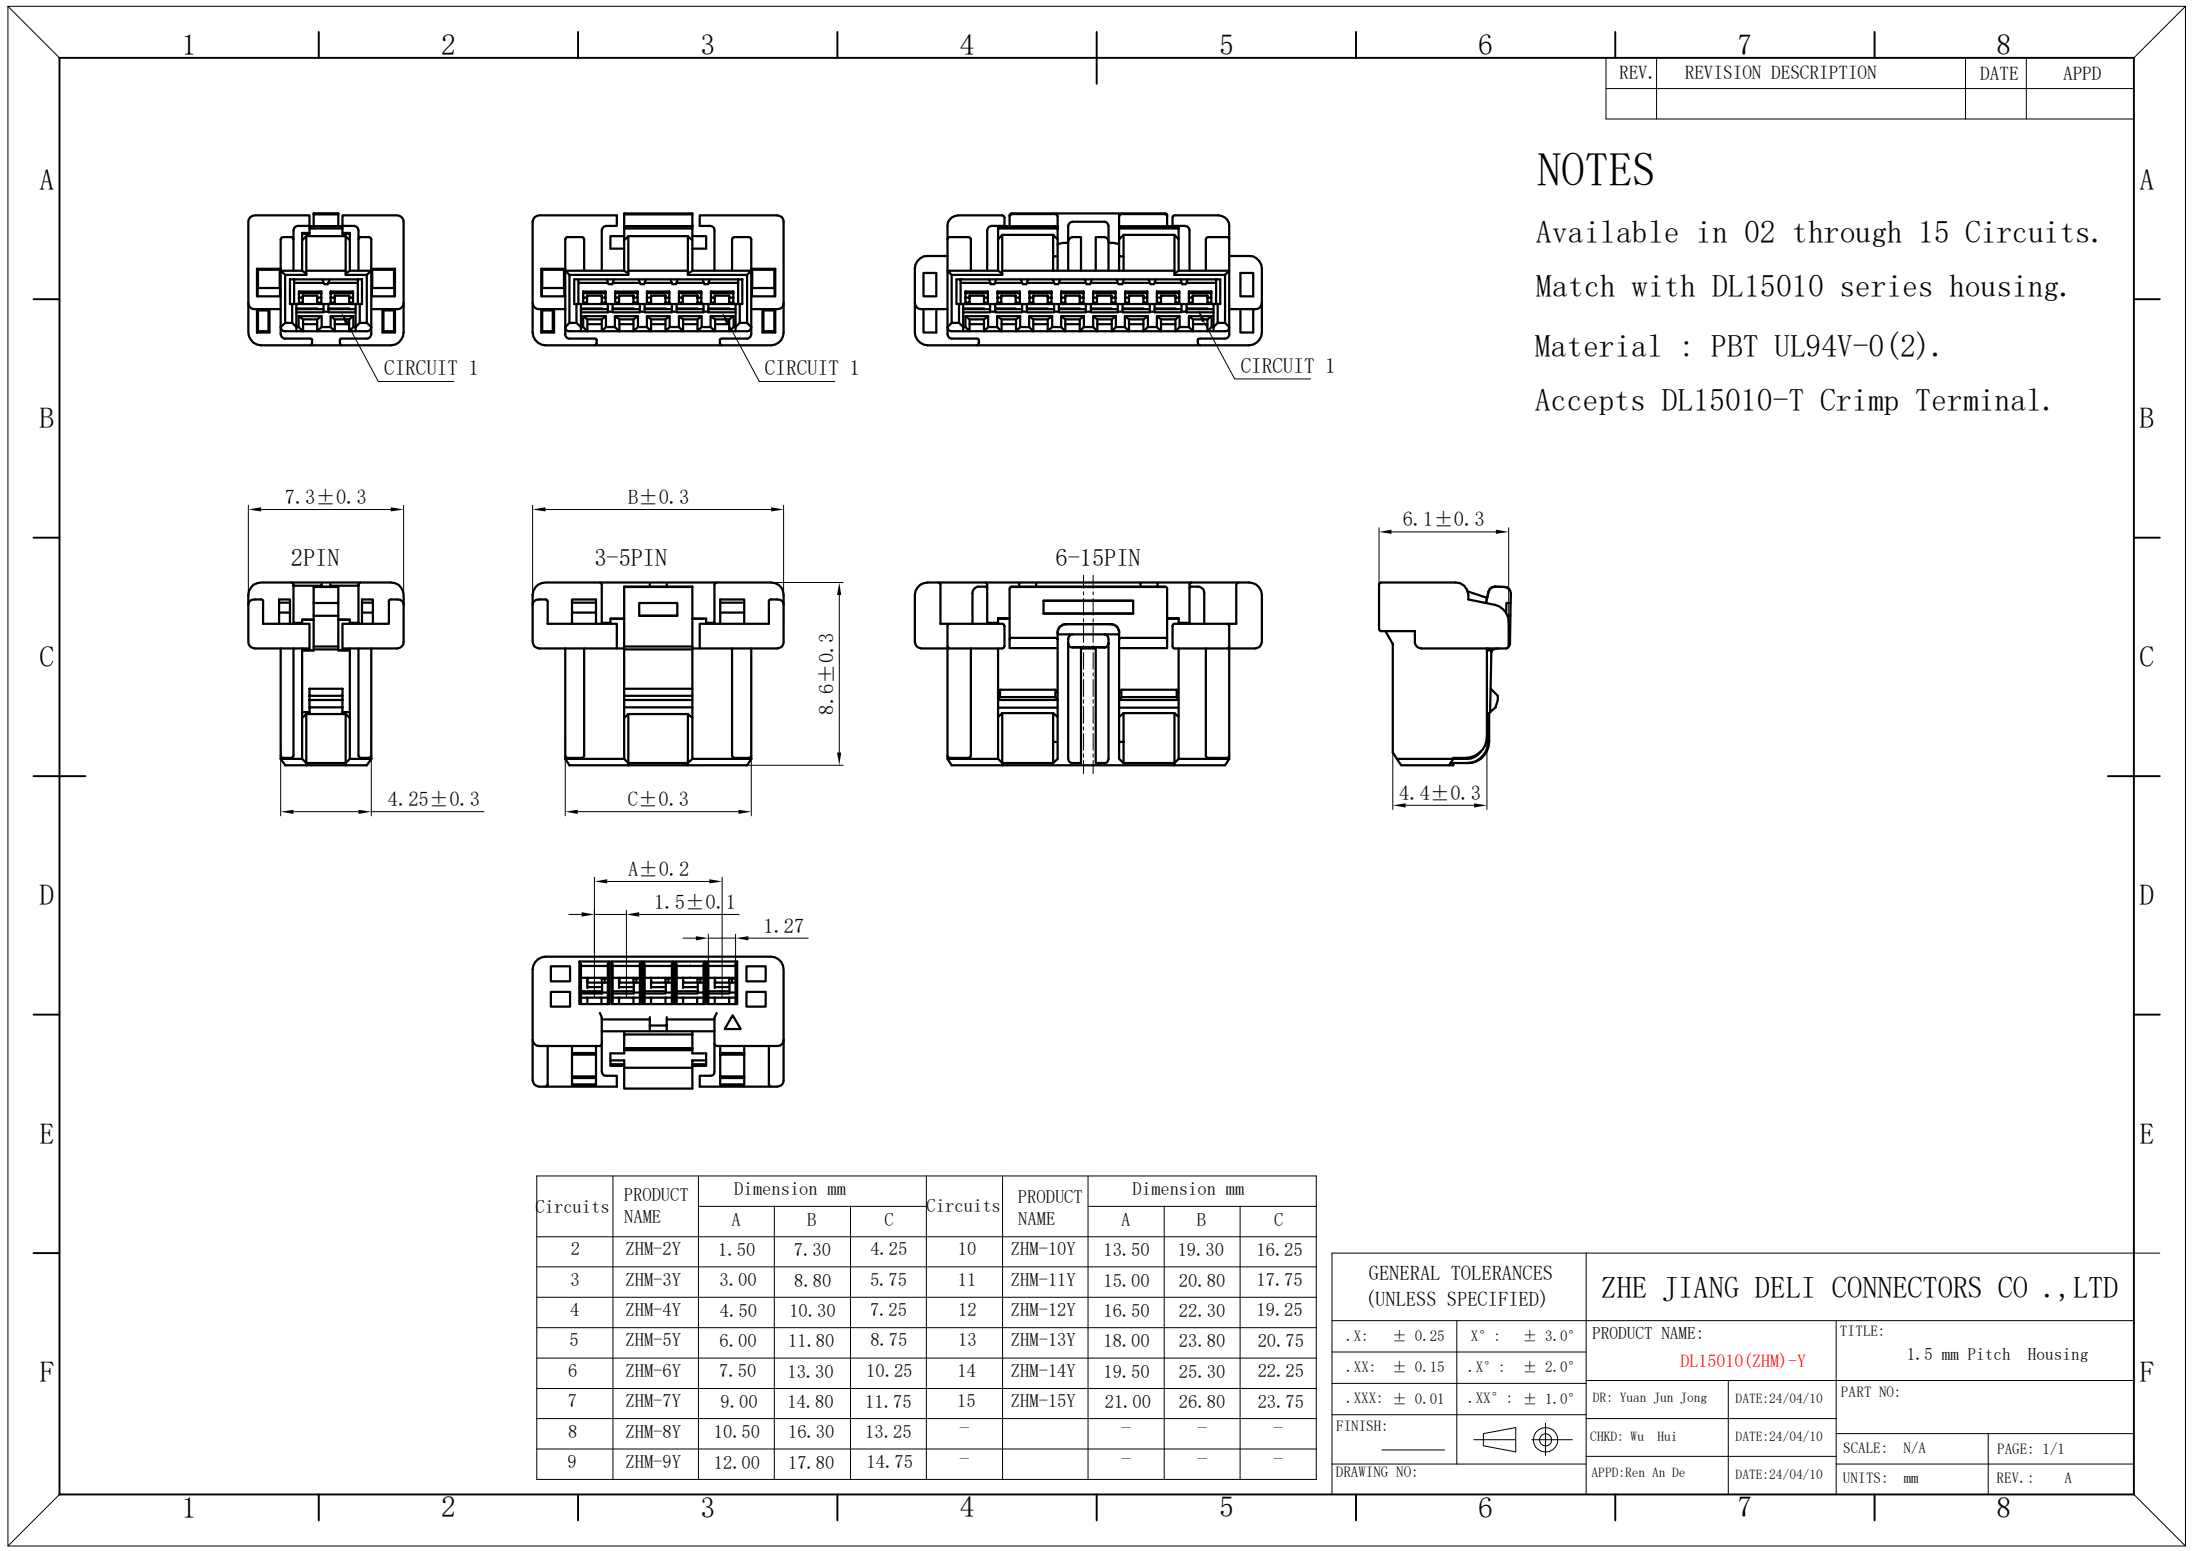


REV.	REVISION DESCRIPTION	DATE	APPD

NOTES

Available in 02 through 15 Circuits.
Match with DL15010 series housing.
Material : PBT UL94V-0(2).
Accepts DL15010-T Crimp Terminal.

Circuits	PRODUCT NAME	Dimension mm			Circuits	PRODUCT NAME	Dimension mm		
		A	B	C			A	B	C
2	ZHM-2Y	1.50	7.30	4.25	10	ZHM-10Y	13.50	19.30	16.25
3	ZHM-3Y	3.00	8.80	5.75	11	ZHM-11Y	15.00	20.80	17.75
4	ZHM-4Y	4.50	10.30	7.25	12	ZHM-12Y	16.50	22.30	19.25
5	ZHM-5Y	6.00	11.80	8.75	13	ZHM-13Y	18.00	23.80	20.75
6	ZHM-6Y	7.50	13.30	10.25	14	ZHM-14Y	19.50	25.30	22.25
7	ZHM-7Y	9.00	14.80	11.75	15	ZHM-15Y	21.00	26.80	23.75
8	ZHM-8Y	10.50	16.30	13.25	-	-	-	-	-
9	ZHM-9Y	12.00	17.80	14.75	-	-	-	-	-

GENERAL TOLERANCES (UNLESS SPECIFIED)		ZHE JIANG DELI CONNECTORS CO., LTD	
.X: ± 0.25	X°: ± 3.0°	PRODUCT NAME: DL15010 (ZHM) -Y	TITLE: 1.5 mm Pitch Housing
.XX: ± 0.15	.X°: ± 2.0°		PART NO:
.XXX: ± 0.01	.XX°: ± 1.0°	DR: Yuan Jun Jong	DATE: 24/04/10
FINISH:		CHKD: Wu Hui	DATE: 24/04/10
DRAWING NO:		APPD: Ren An De	DATE: 24/04/10
		SCALE: N/A	PAGE: 1/1
		UNITS: mm	REV.: A

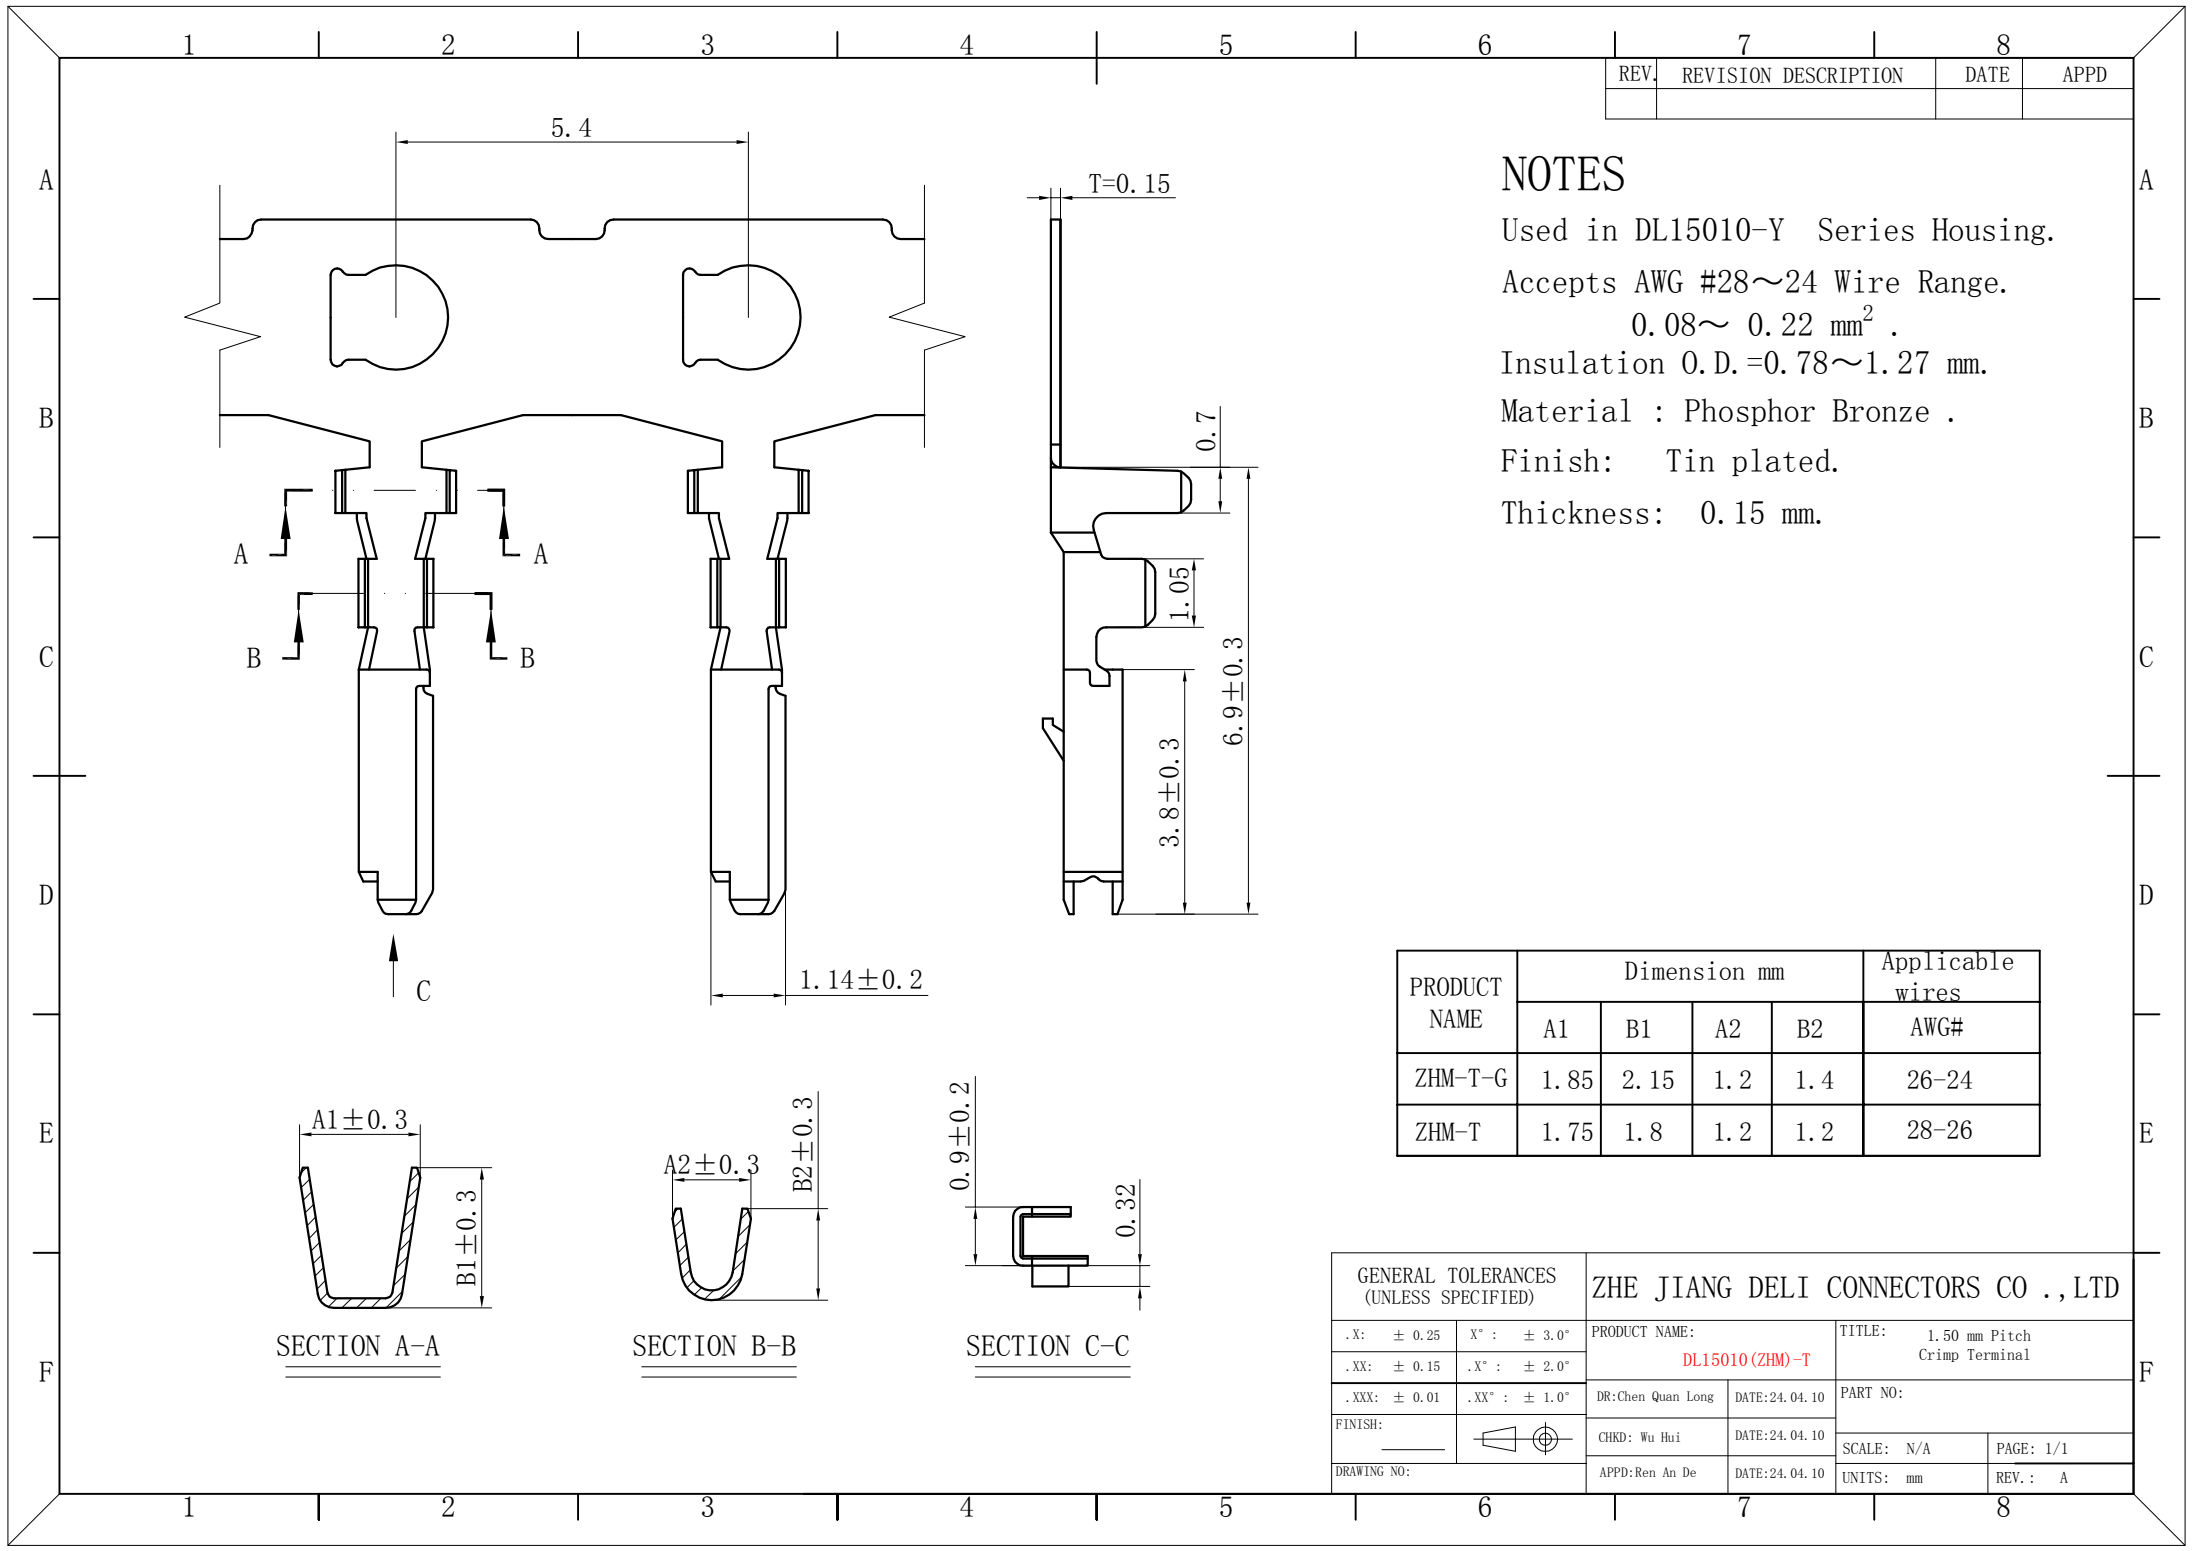

REV.	REVISION DESCRIPTION	DATE	APPD

NOTES

Used in DL15010-Y Series Housing.

Accepts AWG #28~24 Wire Range.

0.08~ 0.22 mm².

Insulation O.D.=0.78~1.27 mm.

Material : Phosphor Bronze .

Finish: Tin plated.

Thickness: 0.15 mm.

PRODUCT NAME	Dimension mm				Applicable wires
	A1	B1	A2	B2	AWG#
ZHM-T-G	1.85	2.15	1.2	1.4	26-24
ZHM-T	1.75	1.8	1.2	1.2	28-26

GENERAL TOLERANCES (UNLESS SPECIFIED)		ZHE JIANG DELI CONNECTORS CO., LTD			
.X: ± 0.25	X° : ± 3.0°	PRODUCT NAME:		TITLE: 1.50 mm Pitch Crimp Terminal	
.XX: ± 0.15	.X° : ± 2.0°	DL15010(ZHM)-T			
.XXX: ± 0.01	.XX° : ± 1.0°	DR:Chen Quan Long	DATE:24.04.10	PART NO:	
FINISH:		CHKD: Wu Hui	DATE:24.04.10	SCALE: N/A	
DRAWING NO:		APPD:Ren An De	DATE:24.04.10	PAGE: 1/1	REV.: A