




ROHS




Compatible

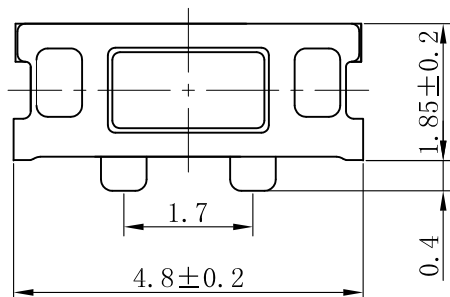

CIRCUIT DIAGRAM

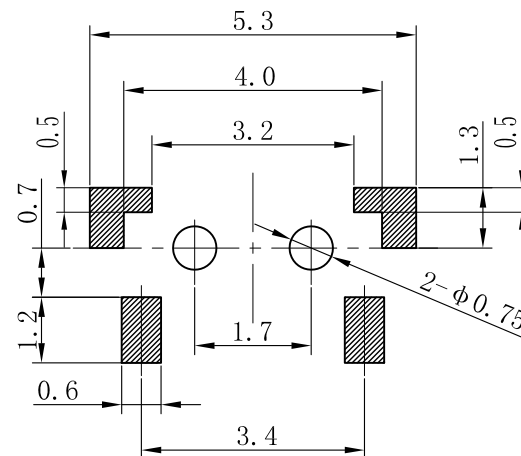

P.C.B LAND DIMENSION

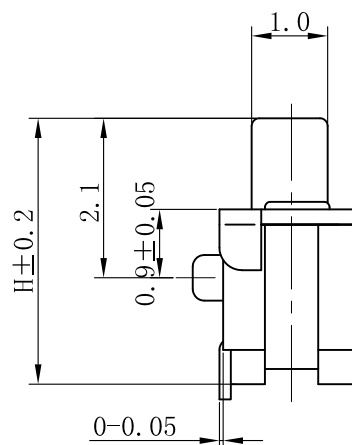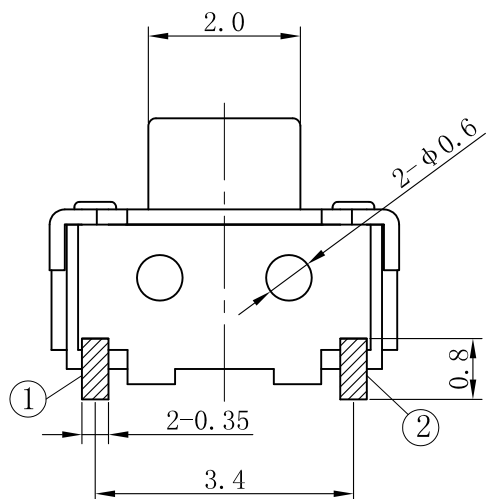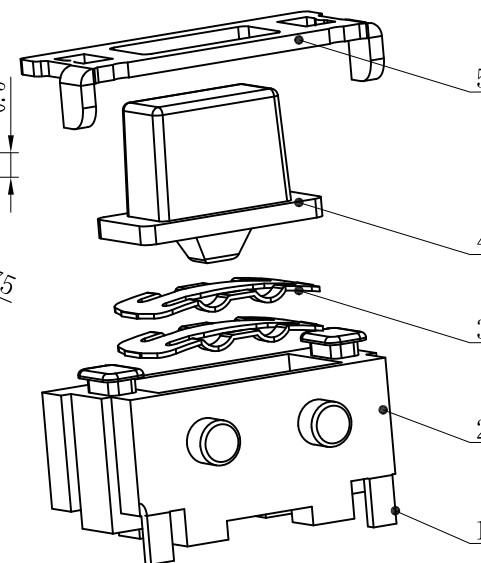

SPECIFICATION

1. Rating: DC 12V 50mA Max
2. Contact resistance: 100mΩ MAX
3. Insulation resistance: 100MΩ Min
4. Dielectric strength: 250VAC/min
5. Operating force: 180gf±50gf
6. Operating life: 50,000 cycles (5V 5mA, 1Ω Max)

REFERENCE DRAWING

UNSPECIFIED TOLERANCE 未指定的公差	
ANGULAR(角度)	±0.5°
16 < L ≤ 63	±0.4
4 < L ≤ 16	±0.3
L ≤ 4	±0.2

5	COVER(盖板)	1	PHOSPHOR BRONZE	Ag plating
4	STEM(按钮)	1	LCP	BLACK
3	CONTACT FORM(弹片)	2	SUS301	Ag plating
2	HOUSING(基座)	1	LCP	WHITE
1	TERMINAL(端子)	1	PHOSPHOR BRONZE	Ag plating
NO(序号)	PART NAME(部件名)	QTY(数量)	MATERIAL(材料)	REMARK(备注)



				版本 VERSION	A1	比例尺 SCALE	1:1	日期 DATE	2021.09.11	品名 TITLE	图号 DRAWING NO
A1	更新规格参数	2021.09.11		核准		核对		绘图	孙成	DS-THAM04-ABB-R	XXXXXXXX
版本 VER	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY		CHECKED BY		DRAWN BY			