


CIRCUIT DIAGRAM

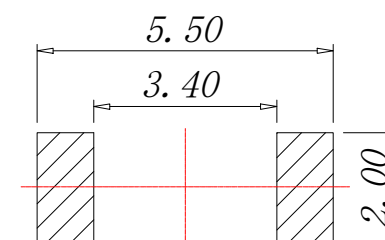

PCB.WELDING DRAWING

<i>F</i>	按钮	<i>LCP</i>	<i>1</i>	黑色
<i>E</i>	盖板	不锈钢	<i>1</i>	清洗
<i>D</i>	防尘胶	聚酰亚胺	<i>1</i>	橙黄色
<i>C</i>	弹片	不锈钢	<i>2</i>	镀银
<i>B</i>	本体	<i>LCP</i>	<i>1</i>	黑色
<i>A</i>	卡件	磷铜	<i>1</i>	镀银
<i>ITEM</i>	<i>DESCRIPTION</i>	<i>MATERIAL</i>	<i>QTY</i>	<i>FINSH / COLOR</i>

The Main Thchnology Performance


Rate voltage,current	50mA DC12V
Contact resistance	$\leq 100\text{m}\Omega$
Operating force	$\pm 50\text{gf}$
Travel	$0.20\pm 0.10\text{mm}$
Insulated resistance	$\geq 100\text{M}\Omega$
Dielectric strength	$\geq 250\text{VAC}/1\text{min}$

TS50610-411-AA

— 按力码 按力可定制

$$\begin{aligned} 100 &= 10 \\ 150 &= 15 \\ 280 &= 28 \end{aligned}$$

- 高度码
H1. 8=018
H2. 0=020
H2. 5=025

GENERAL TOLERANCES UNLESS SPECIFIED		 深圳市华明通电子有限公司 Shenzhen Huamingtong Electronics Co., Ltd			
X.X ±0.35	X.° ±5°	PART NO. TS0610-411-AA		TITLE: 3X6 DIP TACT SWITCH	
.XX ±0.25	X.X° ±3°	DESIGN: James		CUSTOMER	SIZE A4
.XXX ±0.15	X.XX° ±1°	CHED: Talen			UNITS MM
MANUFACTURE DWG		APPD: Sophia			SCALE N:A
					SHEET 1/1