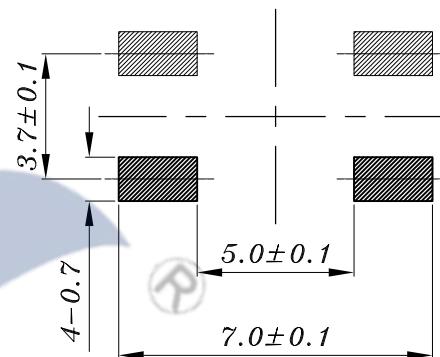
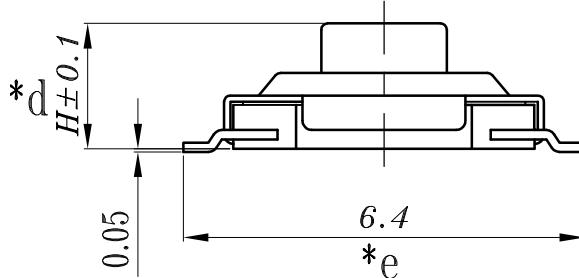
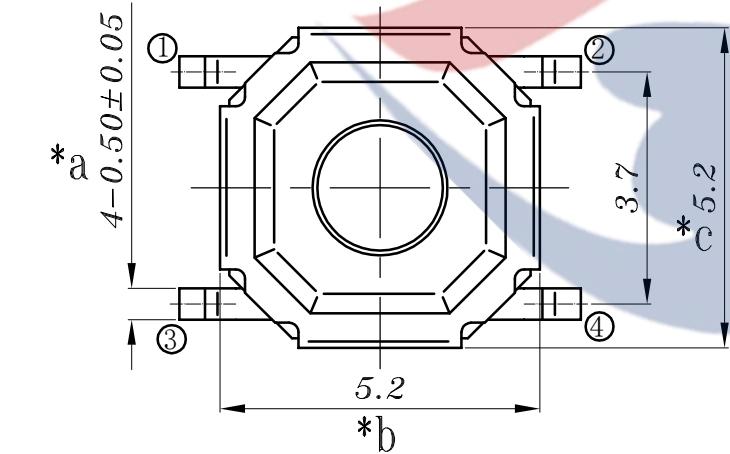
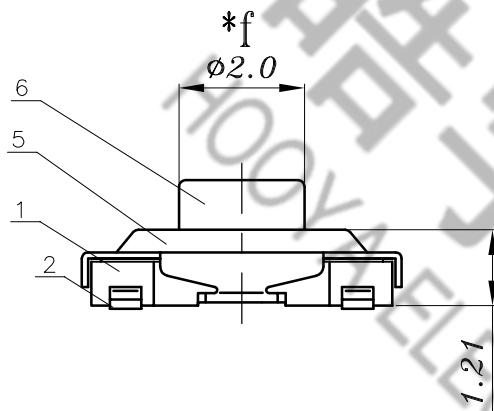


伟易达专用图

P.C.B LAYOUT
TOP VIEW

H=1.7MM

SPECIFICATION

- Rating : DC12V 50mA.
- Contact resistance: $\leq 100\text{m}\Omega$.
- Insulation resistance: $\geq 100\text{M}\Omega$ (DC100V).
- Withstanding voltage: 250VAC .
- Operating Force: $160\pm 50\text{gf}$ /
- Travel: $0.15\pm 0.1\text{mm}$.
- life test: 10,0000 cycles.
- operation temperature range: $-25^\circ\text{C}\sim 85^\circ\text{C}$.
- Sign "*" is importance dimension.

NO.	PART	NAME	MATERIAL	QTY	FINISHING	TOLERANCE UNLESS SPECIFIED		NO	DATE	REVISIONS		BY	APPD
						<1.5: $\pm 0.1\text{mm}$	>1.5~5.0: $\pm 0.25\text{mm}$	ANGULAR $\pm 1^\circ$		DWN	CHK'D		
6	STEM	BRASS		1					A1	2024.4.9	△ 按实物增加材质PI膜/盖子无电镀	MLQ	
5	COVER	SUS		1	△								
4	TAPE	PI △		1	YELLOW								
3	CONTACT	SUS		1	Ag-Plated								
2	TERMINAL	BRASS		4	Ag-Plated								
1	HOUSING	LCP		1	BLACK								
						TITLE: TACT SWITCH		UNIT : MM	ROHS	DWN			
						MODEL: TS-1187-017C-HTF		SCALE: 1:1	COMPLIANT	CHK'D			
						DONGGUANG HAOYU ELECTRONICS CO., LTD				APPD			
						HOYA 皓宇		东莞市弘皓电子有限公司		PRO.AGL:	□	○	REV :A1