

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.

Housing:PA6T+30%G. F UL94V-0, Color:Black

端子: 磷/青铜, 镍底30u", 表面镀金1u"

Contact: Phosphor bronze, 1u" GOLD PLATING OVER ALL

30u" NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Raring Current:2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.

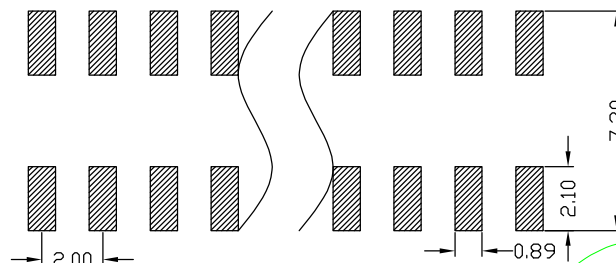
Insulating Resistance:1000 MΩ MIN.

耐电压: AC 500V/分钟.





Withstanding Voltage:AC 500V/Minute.

温度范围: -40°C to $+105^{\circ}\text{C}$


Temperture Range: -40°C to $+105^{\circ}\text{C}$



Recommended P. C. B LAYOUT

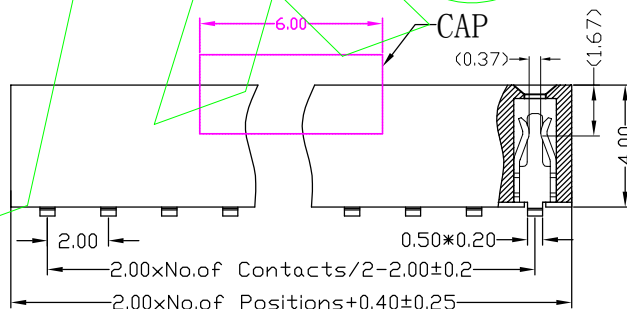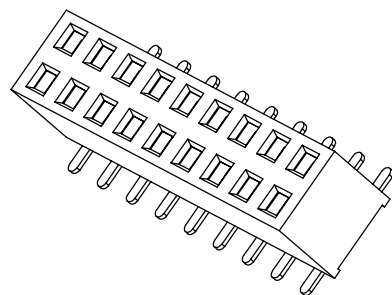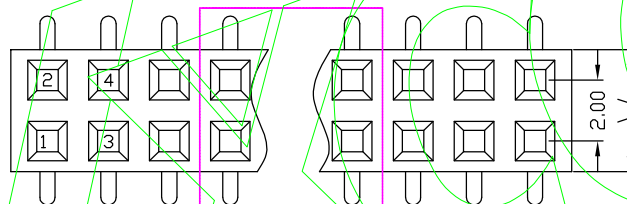General Tolerance ± 0.05 

W:4.0



W:4.5

DIM"W"	4.0	4.5
--------	-----	-----

4.0	4.5
-----	-----

				OPERATION		SCALE		Fit	 东莞市宇熙精密连接器有限公司 www.yxcon.com Dongguan Yuxi Electronic Co.,Ltd.		
				X.X	±0.25	UNIT		MM			
				X.XX	±0.20	SIZE	A4	DESIGN	周芳杰 2022. 12. 27	PART NO	F240-12XXXXXXMUX2
				X.XXX	±0.10						
				Angle	±3°	SHEET	1/1	CHECK		TITLE	2.0间距 塑高4.0 双排母 SMT U型
REV	DATE	SYMBOL	MODIFICATION DESCRIPTION	DIM	TOL	PROJ.		APPROVE		Customer No.	