


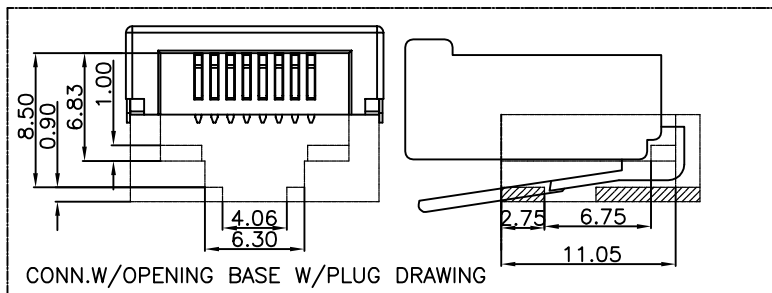


3107 - 011 - XX

系列码
半边RJ45
类别码
011:4.6 DIP铜壳
流水码
11:GF LCP黑 盘装
21:GF LCP黑 卷装



1. HOUSING:GLASS FILLED POLYESTER UL94V-0.
2. CONTACT:PHOSPHOR BRONZE T=0.3.
3. PLATING:GOLD PLATED ON CONTACT AREA,
100u"MIN. TIN PLATED ON SOLDERING AREA,
50u"MIN. NICKEL PLATED OVERALL.
4. SHELL:BRASS,T=0.20.
WITH NICKEL PLATED.

1. VOLTAGE RATING: 125V AC RMS.

2. CURRENT RATING: 1.5AMP.

3. CONTACT RESISTANCE: 30MILLIOHMS MAX.

4. INSULATION RESISTANCE: 500MEGOHMS MIN @500V DC.

MECHANICAL:

1. DURRABILITY: 750 CYCLES MIN.

2. MATING/UNMATING FORCE: 2.24 KG.F MAX.


ENVIRONMENTAL :

1. STORAGE: $-40^{\circ}\text{C}\sim 85^{\circ}\text{C}$

2. OPERATION: $-40^{\circ}\text{C}\sim 85^{\circ}\text{C}$

3. REFLOW SOLDERING Temperature, $255 \pm 5^{\circ}\text{C}$.

*Apply to the EU standards(ROSH)

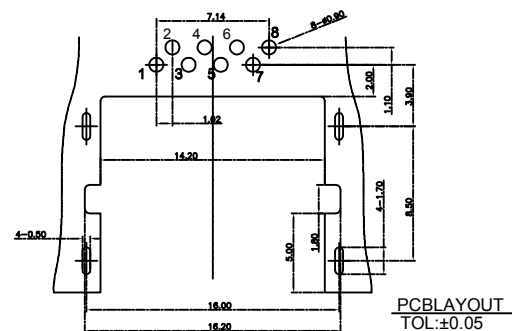

				OPERATION		SCALE		Fit	 东莞市宇熙精密连接器有限公司 www.yxcon.com Dongguan Yuxi Electronic Co.,Ltd.		
				X.X	±0.35	UNIT		MM			
				X.XX	±0.25	SIZE	A4	DESIGN	赵文品2024.11.06	PART NO.	RJ45-3107-011-11
				X.XXX	±0.05						
				Angle	±2°	SHEET	1/1	CHECK		TITLE	RJ45 沉板4.6 DIP GF LCP黑
REV	DATE	SYMBOL	MODIFICATION DESCRIPTION	DIM	TOL	PROJ.		APPROVE		Customer No.	