
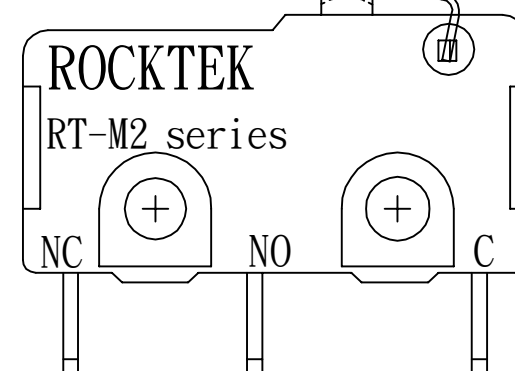
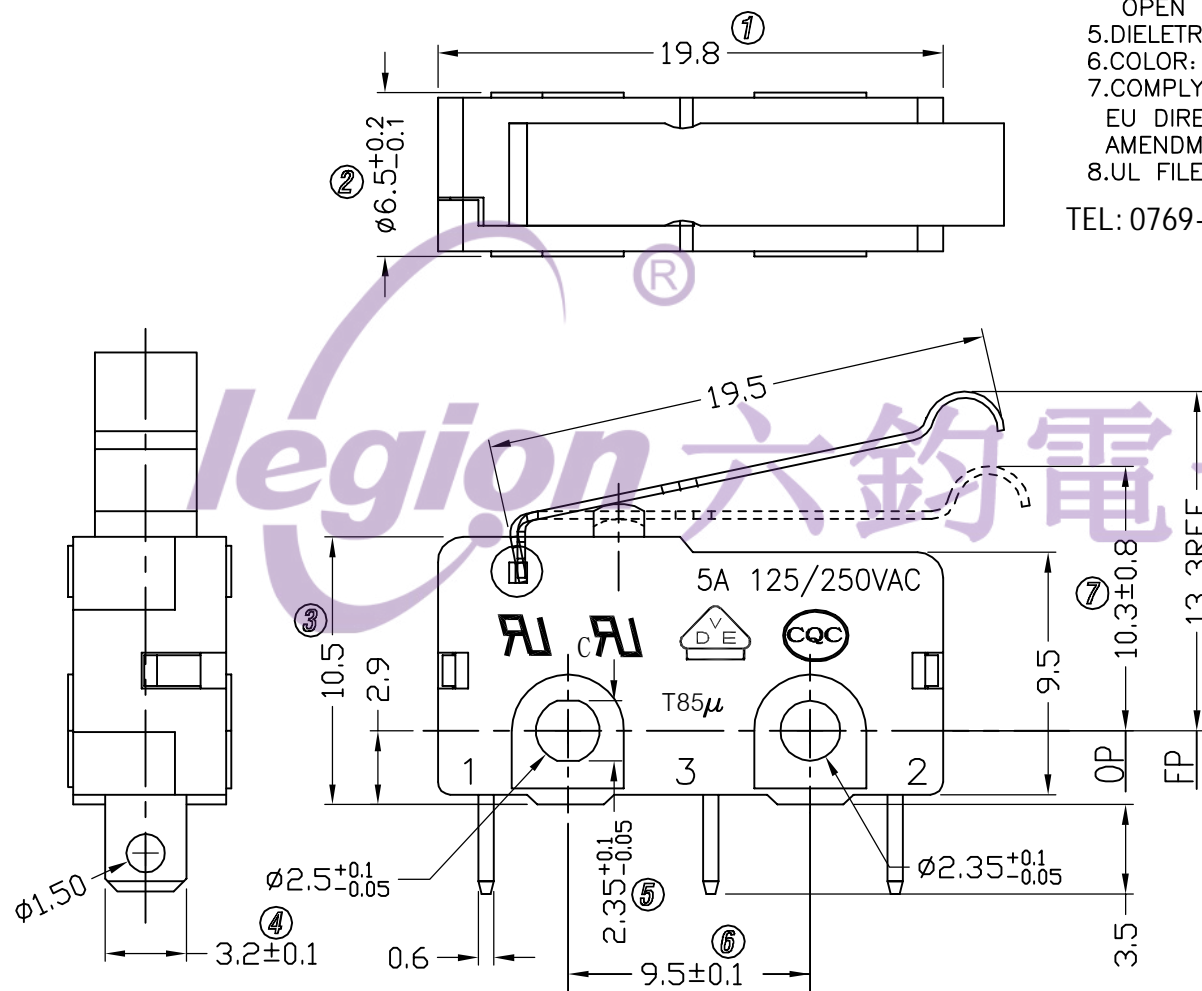



NOTES:

- 1.RATING: 5A125/250VAC.
- 2.OPERATING FORCE: 10~100gf
- 3.CONTACT RESISTANCE: <50mΩ
- 4.INSULATION RESISTANCE: >100MΩ(500VDC BETWEEN OPEN CONTACTS)
- 5.DIELETRIC STRENGTH: >1500Vac 0.5mA 1 MINUTE
- 6.COLOR: BLACK
- 7.COMPLY WITH THE REQUIEMENTS OF THE EU DIRECTION 2002/GS/EC ROHS AND SUBSEQUENT AMENDMENTS.
- 8.UL FILE NO.: E300970.

TEL: 0769-82310510-867

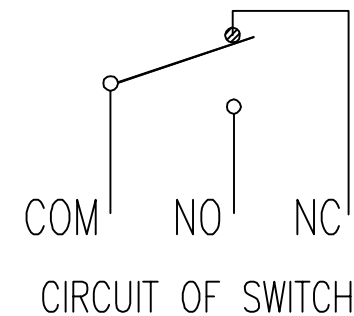

⑤	→	⑩	→	DIMENSIONAL TOLERANCES		APPROVED	CHECKED	DESIGN	DRAWN	ALL SIZE ARE IN	MM		DRAWING NO. REV.		
④	→	⑨	→	RANGE	TOLERANCE					SCALE	NO				
③	→	⑧	→	X	±0.30					MAT'L	***				
②	→	⑦	→	X.X	±0.20					MATERIAL NO.					
①	→	⑥	→	X.XX	±0.10										
NO	DESCRIPTION	NO	DESCRIPTION	ANGLES	±1'	LEGION ELECTRONIC & HARDWARE CO., LTD.							RTM2-10C4S05A200	WIF119039	A