
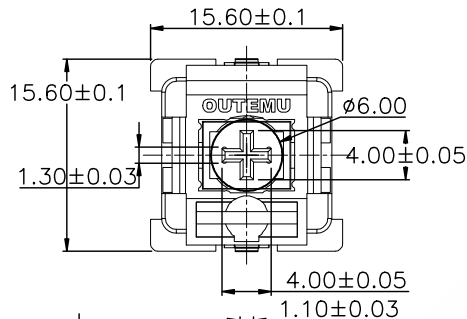
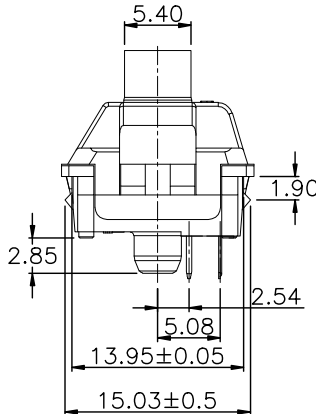
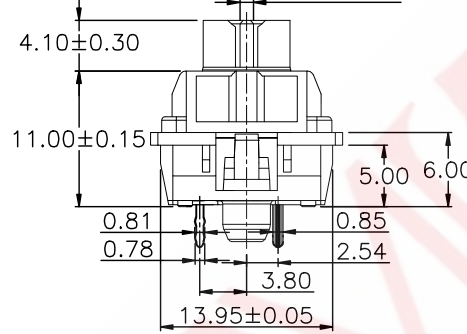







1		2		3		4		5		6		7		8																																																									
SAMZO		REAC/ROHS								REV	ECN NO	DESRIPTION	DESIGN	APPROVAL	DATE																																																								
										A1	NEW	Replace frame			2018.06.14																																																								
E											Technical parameters: Voltage: 12 VAC/DC max 2 VDC min Current: 10mA AC/DC max 10μA DC min Insulation Resistance: 100MΩ at 100V(min) inital Contact Resistance: 200mΩ max Bounce Time: ≤5msec Capacitance: <2pF (at 1kHz) Operating Temperature: -10°C to +70°C Storage Temperature: -40°C to +70°C Flammability Rating: UL94HB Solderability: Wave solder, 5 seconds at 260±5°C Long life : 50,000,000 cycles Operating Force: 60±10gf Total Travel: 4.00mm Pretravel: 2.00±0.6mm Tactile Force: N/A Choice of feel: linear																																																												
D																																																																							
C											<table><tr><td>7</td><td>Contact</td><td>/</td><td>2PCS</td><td>COPPEE</td><td>PLATE</td><td>GOLD</td></tr><tr><td>6</td><td>Spring</td><td>/</td><td>1PCS</td><td>Stainless Steel</td><td>透明</td><td>UL94HB</td></tr><tr><td>5</td><td>Kone</td><td>/</td><td>1PCS</td><td>Thermoplastic</td><td>透明</td><td>UL94HB</td></tr><tr><td>4</td><td>Housing</td><td>/</td><td>1PCS</td><td>Thermoplastic</td><td>透明</td><td>UL94HB</td></tr><tr><td>3</td><td>Cover</td><td>/</td><td>1PCS</td><td>Thermoplastic</td><td>透明</td><td>UL94HB</td></tr><tr><td>2</td><td>Contacts</td><td>/</td><td>1PCS</td><td>COPPER</td><td>/</td><td></td></tr><tr><td>1</td><td>Terminal</td><td>/</td><td>1PCS</td><td>BARSS</td><td>/</td><td></td></tr><tr><td>序号</td><td>零件</td><td>编号</td><td>用量</td><td>材质</td><td>电镀/色</td><td>备注</td></tr></table>					7	Contact	/	2PCS	COPPEE	PLATE	GOLD	6	Spring	/	1PCS	Stainless Steel	透明	UL94HB	5	Kone	/	1PCS	Thermoplastic	透明	UL94HB	4	Housing	/	1PCS	Thermoplastic	透明	UL94HB	3	Cover	/	1PCS	Thermoplastic	透明	UL94HB	2	Contacts	/	1PCS	COPPER	/		1	Terminal	/	1PCS	BARSS	/		序号	零件	编号	用量	材质	电镀/色	备注
7	Contact	/	2PCS	COPPEE	PLATE	GOLD																																																																	
6	Spring	/	1PCS	Stainless Steel	透明	UL94HB																																																																	
5	Kone	/	1PCS	Thermoplastic	透明	UL94HB																																																																	
4	Housing	/	1PCS	Thermoplastic	透明	UL94HB																																																																	
3	Cover	/	1PCS	Thermoplastic	透明	UL94HB																																																																	
2	Contacts	/	1PCS	COPPER	/																																																																		
1	Terminal	/	1PCS	BARSS	/																																																																		
序号	零件	编号	用量	材质	电镀/色	备注																																																																	
B	28 1 150 8 0 D M Ⓐ Ⓑ Ⓒ Ⓓ Ⓔ Ⓕ Ⓖ																																																																						
A	A. 系列:28:键盘轴 B. 贴装方式:1-立插 C. 主体高度:150-15.0mm D. 使用寿命:8-5000万次 E:模具编码:0-017A F:物料要求:D-定制 G:材质颜色:M-全透明				<table><tr><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td>GENERAL TOLERANCE</td><td></td></tr><tr><td></td><td></td><td></td><td>≥0~2<</td><td>±0.15</td></tr><tr><td>DESIGN</td><td>WANGGUIFA</td><td>2018.06.12</td><td>≥2~5<</td><td>±0.25</td></tr><tr><td>CHECKED</td><td>ZHENGUILAN</td><td>2018.06.12</td><td>≥0~2<</td><td>±0.15</td></tr><tr><td>APPROVED</td><td>LILIANJIANG</td><td>2018.06.14</td><td>≥5</td><td>±0.35</td></tr></table>															GENERAL TOLERANCE					≥0~2<	±0.15	DESIGN	WANGGUIFA	2018.06.12	≥2~5<	±0.25	CHECKED	ZHENGUILAN	2018.06.12	≥0~2<	±0.15	APPROVED	LILIANJIANG	2018.06.14	≥5	±0.35	<table><tr><td colspan="4">FIRST VIEW</td></tr><tr><td colspan="4"></td></tr><tr><td>SCALE</td><td>1:1</td><td>UNIT</td><td>mm</td></tr></table> SAMZO COMPONENTS Electronic switch and connector manufacturer		FIRST VIEW								SCALE	1:1	UNIT	mm	The copyright belongs to samzo parts [China] Co., Ltd. please use the material after samzo parts agree to authorize. The final right of interpretation belongs to samzo parts. WWW.KKK-JP.COM <table><tr><td colspan="2">TITLE: 全透明键盘轴H15MM</td></tr><tr><td colspan="2">DWG NO: 281150-P3061</td></tr><tr><td colspan="2">PART NO: 2811503-CH150</td></tr><tr><td colspan="2">MODEL NO: 28115080DM</td></tr><tr><td>NAME:</td><td>PUSH SWITCH</td></tr></table>		TITLE: 全透明键盘轴H15MM		DWG NO: 281150-P3061		PART NO: 2811503-CH150		MODEL NO: 28115080DM		NAME:	PUSH SWITCH				
			GENERAL TOLERANCE																																																																				
			≥0~2<	±0.15																																																																			
DESIGN	WANGGUIFA	2018.06.12	≥2~5<	±0.25																																																																			
CHECKED	ZHENGUILAN	2018.06.12	≥0~2<	±0.15																																																																			
APPROVED	LILIANJIANG	2018.06.14	≥5	±0.35																																																																			
FIRST VIEW																																																																							
																																																																							
SCALE	1:1	UNIT	mm																																																																				
TITLE: 全透明键盘轴H15MM																																																																							
DWG NO: 281150-P3061																																																																							
PART NO: 2811503-CH150																																																																							
MODEL NO: 28115080DM																																																																							
NAME:	PUSH SWITCH																																																																						
1	2	3	4	5	6	7	8																																																																

1		2		3		4		5		6		7		8	
SAMZO		REAC/ROHS								REV	ECN NO	DESRIPTION	DESIGN	APPROVAL	DATE
										A1	NEW	Replace frame			2018.06.14

14.00±0.05

14.00±0.05

R0.30Max

冲床加工方向

开关插入方向

1.50t

组配用铁板角孔尺寸图

METAL FRAME CUTOUT DIMENSIONS

1.50

1.50

With fixing Pins

Without fixing Pins

安装选项

MOUNTING OPTIONS

28

1

150

8

0

D

M

Ⓐ

Ⓑ

Ⓒ

Ⓓ

Ⓔ

Ⓕ

Ⓖ

A. 系列:28:键盘轴

B. 贴装方式:1-立插

C. 主体高度:150-15.0mm

D. 使用寿命:8-5000万次

E:模具编码:0-017A

F:物料要求:D-定制

G:材质颜色:M-全透明

</															