

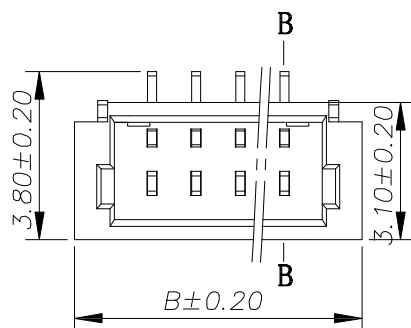

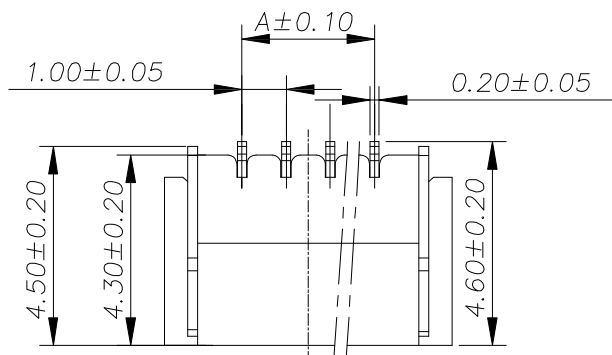


SECTION B-B

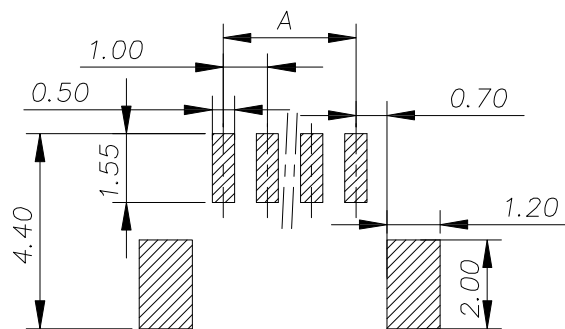

RECOMMEND PCB LAYOUT

TOLERANCE: ± 0.05

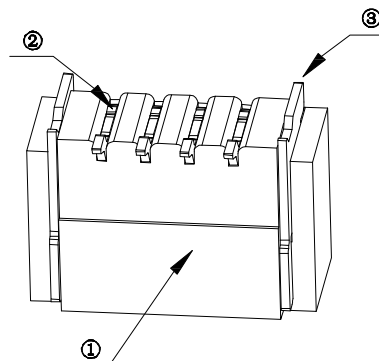

Specifications:

Current Rating: 1A

Voltage Rating: 50V AC/DC

Contact Resistance: 20 Milliohms Max

Contact Resistance: 100M Ω /min

Withstanding Voltage: 500V.AC/min

Operating Temperature Range: -25°C ~ +85°C

Poles	Part No.	Dimension mm	
		A	B
2	W-1001N02P-0000	1.0	4.5
3	W-1001N03P-0000	2.0	5.5
4	W-1001N04P-0000	3.0	6.5
5	W-1001N05P-0000	4.0	7.5
6	W-1001N06P-0000	5.0	8.5
7	W-1001N07P-0000	6.0	9.5
8	W-1001N08P-0000	7.0	10.5
9	W-1001N09P-0000	8.0	11.5
10	W-1001N10P-0000	9.0	12.5
11	W-1001N11P-0000	10.0	13.5
12	W-1001N12P-0000	11.0	14.5
13	W-1001N13P-0000	12.0	15.5
14	W-1001N14P-0000	13.0	16.5
15	W-1001N15P-0000	14.0	17.5

序号	零件名称	数量	材料	备注
①	底座	1	LCP	
②	端子	N	磷铜	镍底, 镀锡
③	焊片	2	黄铜	镍底, 镀锡

TOLERANCE TABLE	
.0	± 0.20
.00	± 0.10
.000	± 0.05

APPROVED:	DATE:	Ckmtw 深圳市灿科盟实业有限公司 CHANKLEMENT INDUSTRYCO., LTD			
CHECKED:	DATE:	TITLE: SH1.0SMT-XP 立贴 (Pitch:1.5mm)			
DRAWN: LYF	DATE: 2019-04-08	CLIENT P/N /			
		UNIT	mm	SCALE	free
		FILE NO.	Ckmtw-SH10-0021	REV.	A JLX1