

注: 未经许可禁止传播、复制、编辑该文档, 以及利用其内容进行交流

REV	E.C.N NO.	CONTENT	CHK	DATE

NOTES1:

UL Standard

- 1.Rating voltage/current: 150V/6A
- 2.withstanding voltage: AC1300V/1Min
- 3.Torque value: M1.6, 0.89Lb.in
- 4.Wire range: 24~18AWG

IEC Standard

1. Pollution Degree	3	2	2
Overvoltage Category	III	III	II
Rate Impulse Voltage(KV)	1.5	1.5	1.5
Rate Voltage(V)	160V	200V	400V
Rate Current(A)	8A	8A	8A

2. Torque value: M1.6, 0.1Nm
- 3.wire range: 1.0mm²

NOTES2:


- 1.Housing: PA66(UL94V-0)
- 2.Solder Pin: Copper alloy(Sn Plated)
- 3.Cage: Brass(Ni Plated)
- 4.Screw: Steel(M1.6,Zn Plated)

NOTES3:

- 1.Pitch: 2.54mm Poles: 02-24P
- 2.Stripping length: 5-6mm
- 3.Operating temperature: -40℃~+105℃
- 4.RoHS Compliance

How to order

MX128	-	254	-	XXP	-	XXXX	-	XX	-	X	-	X
产品型号		间距		颜色:		极数						A-Z其他定制
				灰色:GY	橙色:OE	01:常规颜色						0:Y一字螺丝
				蓝色:BU	红色:RD	02-99:定制颜色						1:S十字螺丝
				黑色:BK	透明色:TT							2:PS平头十字螺丝
				绿色:GN	黄色:YW							Cu:铜方块
				白色:WE								Fe:铁方块

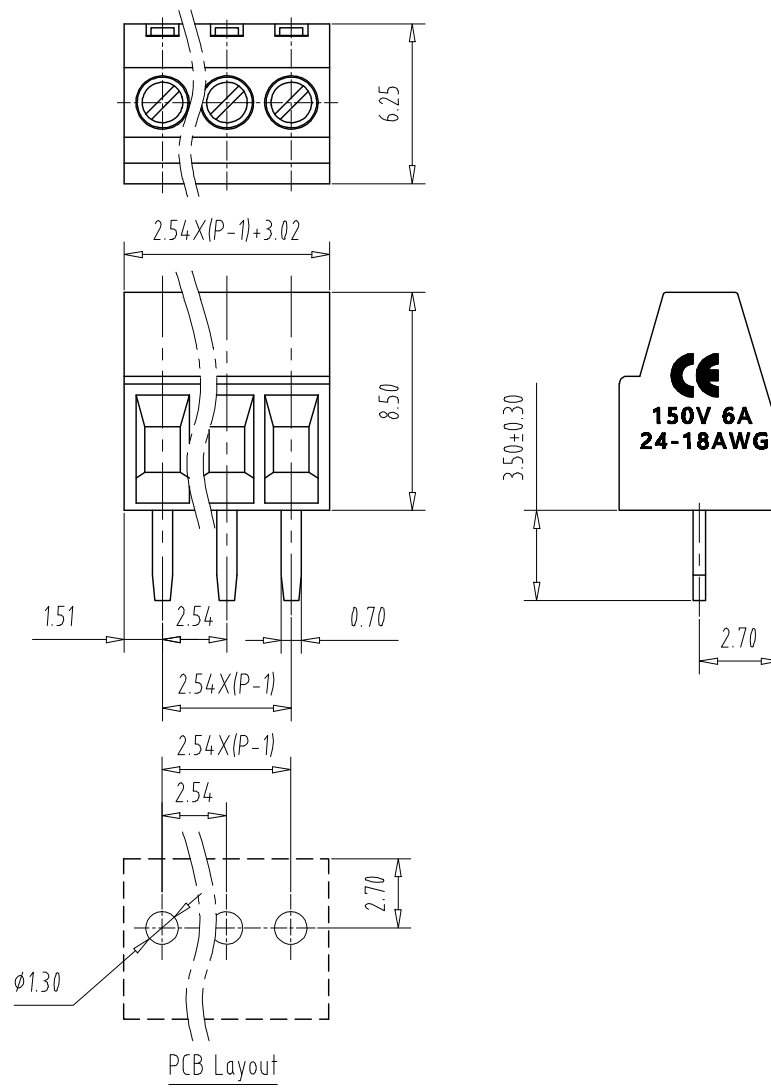

Pitch Range In mm			Nominal Dimension Range In mm					—	∩	□
TO 6	Over 6 TO 10	Over 10 TO 24	TO 30	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150	Over 150	0.1/10		
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°		

ITEM	NAME OF PART		NO. OF PART	Q"TY	MATERIAL		NOTE	
DWG.	CKK	DATE	22.09.14	UNITS	MM	SHEET/OF	1/1	
CHK.		DATE		SCALE	1:1	A4		
APP.		DATE						
	CIXI MAIXU ELECTRONICS CO.,LTD.			NAME	MX128-2.54-XXP			
	慈溪市迈旭电子有限公司			DWGNO.				