
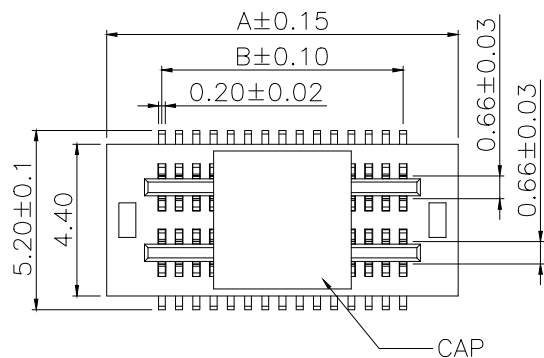
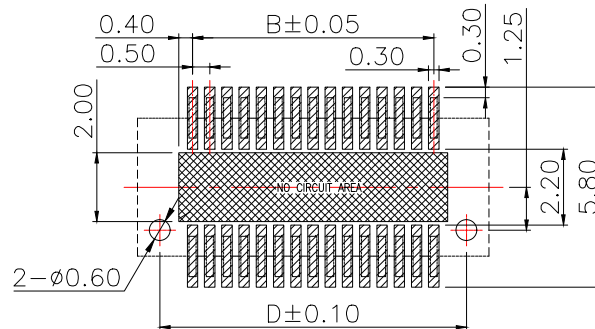
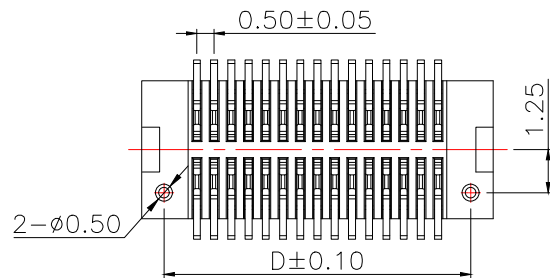
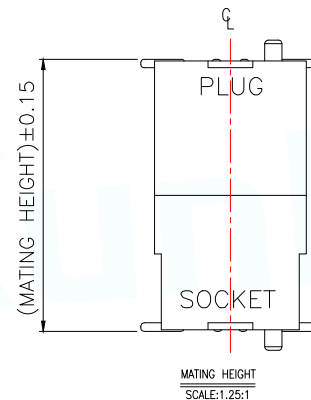



3D VIEW

The product is high	MATING HEIGHT	PLUG (H.)	SOCKET (H.)
BTB0.570-XPLBSC-G71	7.00	4.00	3.00
BTB0.575-XPLBSC-G71	7.50	4.00	3.50
BTB0.580-XPLBSC-G71	8.00	4.00	4.00
BTB0.585-XPLBSC-G71	8.50	4.00	4.50

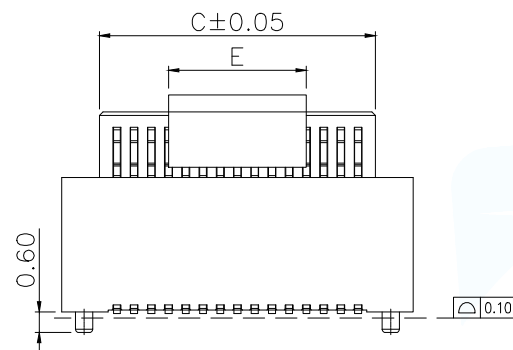

RECOMMENDED PCB PATTERN DIM.

TOLERANCE : ±0.05

SPECIFICATIONS

1. Voltage rating: 60V DC
2. Current rating: 0.5A Max.
3. Operating Temperature: -25°C to +85°C
4. Contact Resistance: 60mΩ Max.
5. Insulation Resistance: 300V DC
6. withstanding Voltage: 500V AC/minute

NOTES:

- 1.HUOSING: PA9T HIGH-TEMP THERMOPLASTIC UL94V-0 COLOR:BLACK
- 2.TERMINAL:PHOSPHOR BRONZE PLATING:1μ.GOLD FLASH OVERALL 50~100μ,NICKEL UNDER PLATED

Model	PIN	DIM A	DIM B	DIM C	DIM D	DIM E
BTB0.585-4PLBSC-G71	4	3.70	0.50	1.50	2.40	4.00
BTB0.585-6PLBSC-G71	6	4.20	1.00	2.00	2.90	
BTB0.585-8PLBSC-G71	8	4.70	1.50	2.50	3.40	
BTB0.585-10PLBSC-G71	10	5.20	2.00	3.00	3.90	
BTB0.585-12PLBSC-G71	12	5.70	2.50	3.50	4.40	
BTB0.585-14PLBSC-G71	14	6.20	3.00	4.00	4.90	
BTB0.585-16PLBSC-G71	16	6.70	3.50	4.50	5.40	
BTB0.585-18PLBSC-G71	18	7.20	4.00	5.00	5.90	
BTB0.585-20PLBSC-G71	20	7.70	4.50	5.50	6.40	
BTB0.585-22PLBSC-G71	22	8.20	5.00	6.00	6.90	
BTB0.585-24PLBSC-G71	24	8.70	5.50	6.50	7.40	8.00
BTB0.585-26PLBSC-G71	26	9.20	6.00	7.00	7.90	
BTB0.585-28PLBSC-G71	28	9.70	6.50	7.50	8.40	
BTB0.585-30PLBSC-G71	30	10.20	7.00	8.00	8.90	
BTB0.585-32PLBSC-G71	32	10.70	7.50	8.50	9.40	
BTB0.585-34PLBSC-G71	34	11.20	8.00	9.00	9.90	
BTB0.585-36PLBSC-G71	36	11.70	8.50	9.50	10.40	
BTB0.585-38PLBSC-G71	38	12.20	9.00	10.00	10.90	
BTB0.585-40PLBSC-G71	40	12.70	9.50	10.50	11.40	
BTB0.585-42PLBSC-G71	42	13.20	10.00	11.00	11.90	
BTB0.585-44PLBSC-G71	44	13.70	10.50	11.50	12.40	
BTB0.585-46PLBSC-G71	46	14.20	11.00	12.00	12.90	8.00
BTB0.585-48PLBSC-G71	48	14.70	11.50	12.50	13.40	
BTB0.585-50PLBSC-G71	50	15.20	12.00	13.00	13.90	
BTB0.585-52PLBSC-G71	52	15.70	12.50	13.50	14.40	
BTB0.585-54PLBSC-G71	54	16.20	13.00	14.00	14.90	
BTB0.585-56PLBSC-G71	56	16.70	13.50	14.50	15.40	
BTB0.585-58PLBSC-G71	58	17.20	14.00	15.00	15.90	
BTB0.585-60PLBSC-G71	60	17.70	14.50	15.50	16.40	
BTB0.585-62PLBSC-G71	62	18.20	15.00	16.00	16.90	
BTB0.585-64PLBSC-G71	64	18.70	15.50	16.50	17.40	
BTB0.585-66PLBSC-G71	66	19.20	16.00	17.00	17.90	8.00
BTB0.585-68PLBSC-G71	68	19.70	16.50	17.50	18.40	
BTB0.585-70PLBSC-G71	70	20.20	17.00	18.00	18.90	
BTB0.585-72PLBSC-G71	72	20.70	17.50	18.50	19.40	
BTB0.585-74PLBSC-G71	74	21.20	18.00	19.00	19.90	
BTB0.585-76PLBSC-G71	76	21.70	18.50	19.50	20.40	
BTB0.585-78PLBSC-G71	78	22.20	19.00	20.00	20.90	
BTB0.585-80PLBSC-G71	80	22.70	19.50	20.50	21.40	
BTB0.585-82PLBSC-G71	82	23.20	20.00	21.00	21.90	
BTB0.585-84PLBSC-G71	84	23.70	20.50	21.50	22.40	
BTB0.585-86PLBSC-G71	86	24.20	21.00	22.00	22.90	8.00
BTB0.585-88PLBSC-G71	88	24.70	21.50	22.50	23.40	
BTB0.585-90PLBSC-G71	90	25.20	22.00	23.00	23.90	
BTB0.585-92PLBSC-G71	92	25.70	22.50	23.50	24.40	
BTB0.585-94PLBSC-G71	94	26.20	23.00	24.00	24.90	
BTB0.585-96PLBSC-G71	96	26.70	23.50	24.50	25.40	
BTB0.585-98PLBSC-G71	98	27.20	24.00	25.00	25.90	
BTB0.585-100PLBSC-G71	100	27.70	24.50	25.50	26.40	

MANUFACTURE DWG

东莞市讯普电子科技有限公司
DongGuan XunPu Electronics Co.,Ltd

UNLESS OTHERWISE SPECIFIED TOLERANCES



TITLE: 0.5mm 双槽BTB PLUG

PAR BTB0.585-XPLBSC-G71

DECIMALS:

ANGLES:

.X±0.25

±1°

.XX±0.15

SCALE:1:1

UNIT:MM

REV:A

.XXX±0.05

CUSTOMER COPY

SIZE:A4

SHEET:1F1

REV:A