



XunPu

东莞市讯普电子科技有限公司

Dongguan Xunpu Electronic Technology Co., Ltd

## 承 认 书

### SPECIFICATION FOR APPROVAL

客 户 名 称 Customer:

\_\_\_\_\_

贵司料号CUSTOMER P/N:

\_\_\_\_\_

FFC cable 1.0mm 10P, total length 100mm, co-directional, gold finger 4mm, reinforcing plate 8mm

敝司料号INTERIOR P/N:

FFC-1.0-10-100-A-4-8

#### 贵公司承认印 Approval signatures


| 料 号/Part No. | 签 章/Signatures |
|--------------|----------------|
|              |                |

Send us a copy of reference, thank you!

日期 Date:

|             |    |
|-------------|----|
| 拟制/Drawn    | 李明 |
| 审核/Check    | 李军 |
| 批准/Approved | 向钰 |



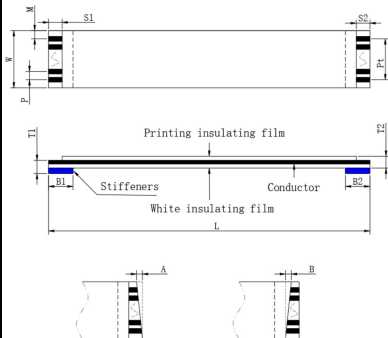

#### Precautions

- The body image is for relationship comparison only, and everything is subject to the specifications of the data sheet.

| Structure |                 |               |              |
|-----------|-----------------|---------------|--------------|
| NO        | Project         | Specification | Remark       |
| 1         | Insulating film | Print 20624   | 43um 60V 80C |
| 2         | Stiffeners      | Blank film    | 43um         |
| 3         | Conductor       | Blue          | 225um PET    |
| 4         | Conductor       | Thickness     | 0.035 ±0.005 |
|           | tinning         | Width         | 0.3 ±0.03    |
|           | plating         | Electroplate  | Tin Sn ≥40u" |
|           |                 | Electroplate  |              |

| Size                   |       |      |       |
|------------------------|-------|------|-------|
| Number of conductor    | N     | 10   |       |
| Spacing                | P     | 1.0  | ±0.05 |
| Total spacing          | Pt    | 9    | ±0.08 |
| Overall width          | W     | 11   | ±0.08 |
| Edge width             | M     | 1.0  | ±0.08 |
| Overall length         | L     | 100  | ±1.5  |
| Mating thickness       | T1    | 0.3  | ±0.05 |
| Thickness of the       | T2    | 0.12 | ±0.03 |
| The inclination of the | A     | —    | ≤0.3  |
| Punching inclination   | B     | —    | ≤0.5  |
| The length of the bare | S1/S2 | 4/4  | ±0.05 |
| Length of stiffener    | B1/B2 | 8/8  | ±1.5  |

| Ancillary checklists |         |               |          |
|----------------------|---------|---------------|----------|
| NO                   | Project | Specification | Quantity |
| 1                    |         |               |          |
| 2                    |         |               |          |
| 3                    |         |               |          |

- Shelf life: 12 months for gold plating; Tin plating for 6
- Storage environment: temperature 0°C-38°C; Humidity

|                            |                      |                 |  |
|----------------------------|----------------------|-----------------|--|
| Specifications and models: | FFC-1.0-10-100-A-4-8 |                 |  |
| Customer part number:      |                      | Customer model: |  |
| Version                    | What's Changed       | date            |  |
| A/O                        | New production       | 2022/09/05      |  |
|                            |                      |                 |  |
|                            |                      |                 |  |



**XunPu** 东莞市讯普电子科技有限公司

|             |              |                |                |           |          |
|-------------|--------------|----------------|----------------|-----------|----------|
| Name:       | FFC flexible | Figure number: | XP2022090501   | Drawing:  | Li ming  |
| Proportion: | 1:1          | Unit:          | Millimetre(mm) | Audit:    | Chen Jun |
| Vision:     | ◆            | Page number:   | Page 1 of 1    | Approved: | Xiang Yu |