

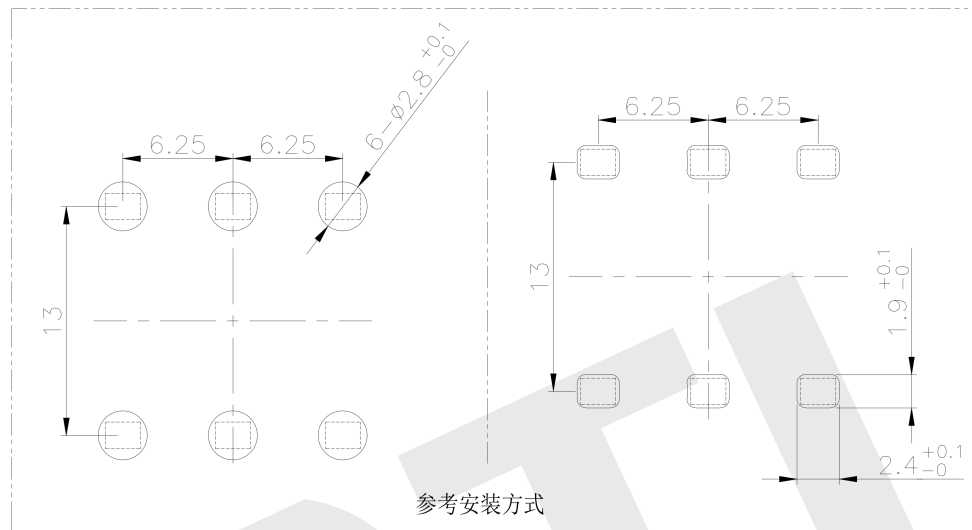
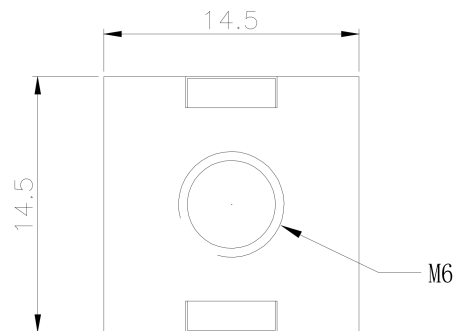


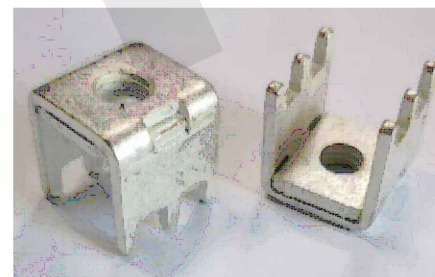

NOTES:
备注

1. Copper ,nickel base,matte tin
黄铜, 镍底, 镀雾锡
2. Wire screw hole M6
压线螺孔M6
3. Current Rating: 126A
额定电流:126A
4. There shall be no defects such as pin deformation and burrs.
不得有脚变形, 毛刺等缺陷
5. Unmarked dimensions refer to tolerances
未标注的尺寸参考公差

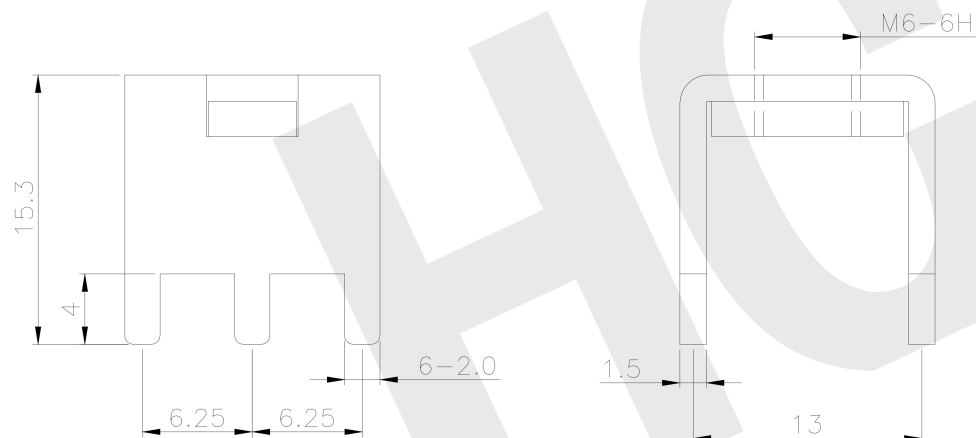

Ordering Information

HC - * * * - * * * - D * * * - 01

Type	Screw	Welding	Series	Product No.	Material
插板 (插板)	3-6H (螺孔)	100-100mm	100-100mm	插板 (插板)	黄铜 (黄铜)
插板 (插板)	3-6H (螺孔)	100-100mm	100-100mm	插板 (插板)	黄铜 (黄铜)
插板 (插板)	3-6H (螺孔)	100-100mm	100-100mm	插板 (插板)	黄铜 (黄铜)
插板 (插板)	3-6H (螺孔)	100-100mm	100-100mm	插板 (插板)	黄铜 (黄铜)



GENERAL TOLERANCE		制 图 DRAWING	01	 深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD			
DIM	TOL	审 核 CHECK		产品名称 TITLE	PCB 焊接端子 插板 铆垫片 M6 6焊脚 14.5x14.5x15.3mm	版 本 REV.	A
5 or more	±0.35	批 准 APPROVAL		产品料号 PART NO.	HC-RG66-1414-D003RC-01	单 位 UNITS	mm
2~5	±0.25	比 例 SCALE		材 料 MATERIAL		页 次 SHEET	1/1
0~2	±0.15	投 影 Projection					
Angle	±3.0°						