


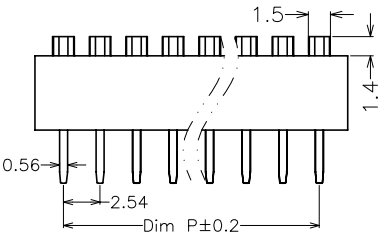




Poles	01P	02P	03P	04P	05P	06P	07P	08P	09P	10P	12P
Dim P	---	2.54	5.08	7.62	10.16	12.70	15.24	17.78	20.32	22.86	27.94
Dim L	3.96	6.50	9.04	11.58	14.12	16.66	19.20	21.74	24.28	26.82	31.90

REV	ECN	DESCRIPTION	DRFT	DATE

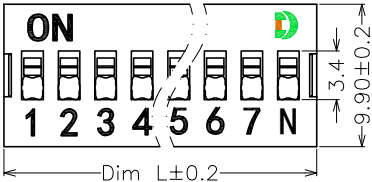

P.C.B.LAYOUT


SCHEMATIC(TYP.)



HOW TO ORDER

DS-XXP-C-XX

- L:LONG PIN(3.7) S:SHORT PIN(3.0)
- G:Convex bottom F:Flat bottom
- Color: RD(Red) BU(Blue) BK(Black)
- No.of poles:01~12P
- MODEL



5	Contact	Copper alloy	Au Plated
4	Tape Sealed	Polyester Film	/
3	Base	PBT	UL94V-0
2	Cover	PBT(Blue/Red/Black)	UL94V-0
1	Button	PBT	UL94V-0
NO	NAME OF PART	MATERIAL	NOTES

GENERAL TOLERANCE	ANGLE TOLERANCE
X. ±0.5	X' ±5°
.X ±0.3	.X' ±3°
.XX ±0.1	.XX' ±1°
DRFT: ENK 2025.02.27	

NINGBO DORABO ELECTRICAL CO., LTD			
NAME: DS-XXP-C-XX			
DRAWING NO.: DB0021040011	REV	MO	
TYPE: CUSTOMER_DRAWING	SCALE:	SHEET	1/1