

SPTECH Silicon NPN Power Transistor

MJ13333

DESCRIPTION

- Collector-Emitter Sustaining Voltage-
: $V_{CEO(SUS)} = 400V(\text{Min})$
- High Switching Speed

APPLICATIONS



- Designed for high-voltage ,high-speed, power switching in inductive circuits where fall time is critical. They are particularly suited for line operated switchmode applications.
- Switching regulators
- Inverters
- Solenoid and relay drivers
- Motor controls
- Deflection circuits

ABSOLUTE MAXIMUM RATINGS($T_a=25^{\circ}C$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{CEV}	Collector-Emitter Voltage	700	V
V_{CEO}	Collector-Emitter Voltage	400	V
V_{EBO}	Emitter-Base Voltage	6	V
I_C	Collector Current-Continuous	20	A
I_{CM}	Collector Current-Peak	30	A
I_B	Base Current-Continuous	10	A
I_{BM}	Base Current-Peak	15	A
P_C	Collector Power Dissipation@ $T_c=25^{\circ}C$	175	W
T_J	Junction Temperature	200	$^{\circ}C$
T_{stg}	Storage Temperature	-65~200	$^{\circ}C$

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th\ j-c}$	Thermal Resistance,Junction to Case	1.0	$^{\circ}C/W$

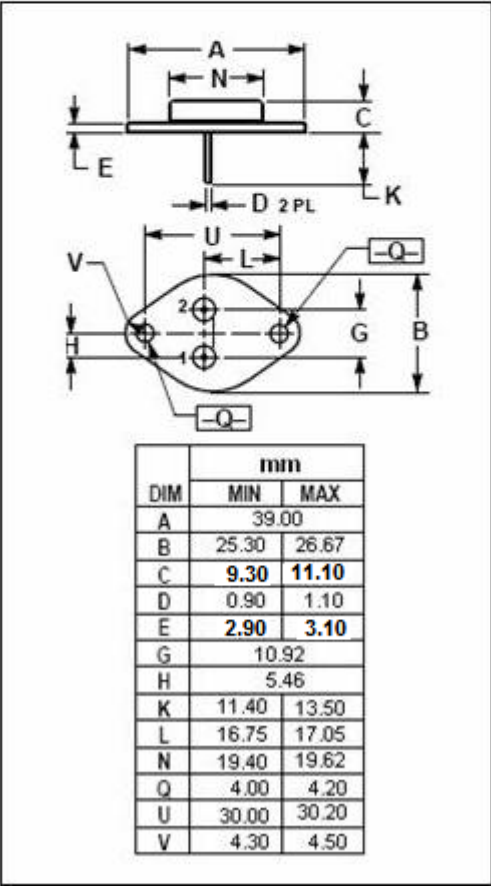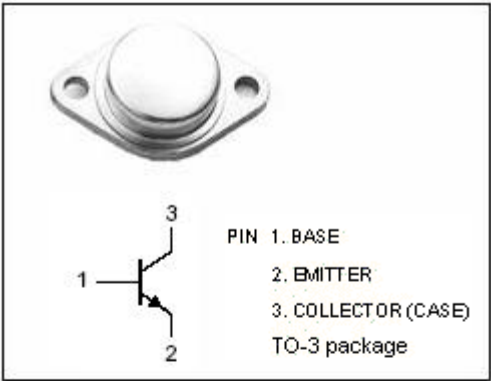

ELECTRICAL CHARACTERISTICS

 $T_C=25^{\circ}\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{CEO(SUS)}$	Collector-Emitter Sustaining Voltage	$I_C=100\text{mA}$; $I_B=0$	400			V
$V_{CE(sat)-1}$	Collector-Emitter Saturation Voltage	$I_C=10\text{A}$; $I_B=2\text{A}$ $I_C=10\text{A}$; $I_B=2\text{A}$, $T_C=100^{\circ}\text{C}$			1.8 2.4	V
$V_{CE(sat)-2}$	Collector-Emitter Saturation Voltage	$I_C=20\text{A}$; $I_B=6.7\text{A}$			5	V
$V_{BE(sat)}$	Base-Emitter Saturation Voltage	$I_C=10\text{A}$; $I_B=2\text{A}$ $I_C=10\text{A}$; $I_B=2\text{A}$, $T_C=100^{\circ}\text{C}$			1.8 1.8	V
I_{CEV}	Collector Cutoff Current	$V_{CEV}=400\text{V}$; $V_{BE(off)}=1.5\text{V}$ $V_{CEV}=400\text{V}$; $V_{BE(off)}=1.5\text{V}$; $T_C=150^{\circ}\text{C}$			0.25 5.0	mA
I_{CER}	Collector Cutoff Current	$V_{CE}=400\text{V}$; $R_{BE}=50\Omega$; $T_C=100^{\circ}\text{C}$			5.0	mA
I_{EBO}	Emitter Cutoff Current	$V_{EB}=6\text{V}$; $I_C=0$			1	mA
h_{FE}	DC Current Gain	$I_C=5\text{A}$; $V_{CE}=5\text{V}$	10		60	
f_T	Current Gain-Bandwidth Product	$I_C=0.3\text{A}$; $V_{CE}=10\text{V}$; $f_{test}=1\text{MHz}$	5		40	MHz
C_{OB}	Output Capacitance	$I_E=0$; $V_{CB}=10\text{V}$; $f_{test}=1\text{kHz}$	125		500	pF

Switching times;Resistive Load

t_d	Delay Time	$I_C=10\text{A}$, $V_{CC}=250\text{V}$; $I_{B1}=2\text{A}$ $V_{BE(off)}=5\text{V}$; $t_p=10\mu\text{s}$; Duty Cycle $\leq 2.0\%$		0.02	0.1	μs
t_r	Rise Time			0.3	0.7	μs
t_s	Storage Time			1.6	4.0	μs
t_f	Fall Time			0.3	0.7	μs